



6 Section Bandpass Filter With SMA Female Connectors Operating From 4.4 GHz to 4.95 GHz With a 550 MHz Passband

Bandpass Filters Technical Data Sheet

PE8739

Features

- Pass band of 550 MHz
- 4.4 to 4.95 GHz
- Six section
- Combine filter design
- Minimum 30 dB rejection at 5.25 GHz to 5.85 GHz frequency range
- Maximum insertion loss of 1.25 dB
- Female SMA connectors

Applications

- P2P
- Public Safety

Description

The PE8739 is a six section band pass filter that is useful for filtering for P2P and public safety uses. The pass band is 550 MHz, or 4.4 to 4.95 GHz. Implementing a combine design, the filter has excellent minimum rejection of 30 dB at 5.25 GHz to 5.85 GHz frequency range. It has a maximum insertion loss of 1.25 dB. The PE8739 has SMA Female connectors.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Passband Frequency	4.4		4.95	GHz
Impedance		50		Ohms
Insertion Loss			1.25	dB
Passband VSWR		1.5:1		
Rejection at 5.25 GHz	30			dB
Rejection at 5.85 GHz	30			dB
Input Power, CW			5	Watts

Electrical Specification Notes: Values at +25°C, sea level.

Mechanical Specifications

Size

Length	1.97 in [50.04 mm]
Width	0.74 in [18.8 mm]
Height	0.53 in [13.46 mm]
Weight	0.08 lbs [36.29 g]

Configuration

Design	Bidirectional Combine
Number of Sections	6
Package Style	Connectorized Module
Connector 1	SMA Female
Connector 2	SMA Female

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 Section Bandpass Filter With SMA Female Connectors Operating From 4.4 GHz to 4.95 GHz With a 550 MHz Passband PE8739](#)



6 Section Bandpass Filter With SMA Female Connectors
Operating From 4.4 GHz to 4.95 GHz With a 550 MHz Passband

Bandpass Filters Technical Data Sheet

PE8739

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant



REACH Compliant

12/17/2015

Plotted and Other Data

Notes:

Typical Performance Data

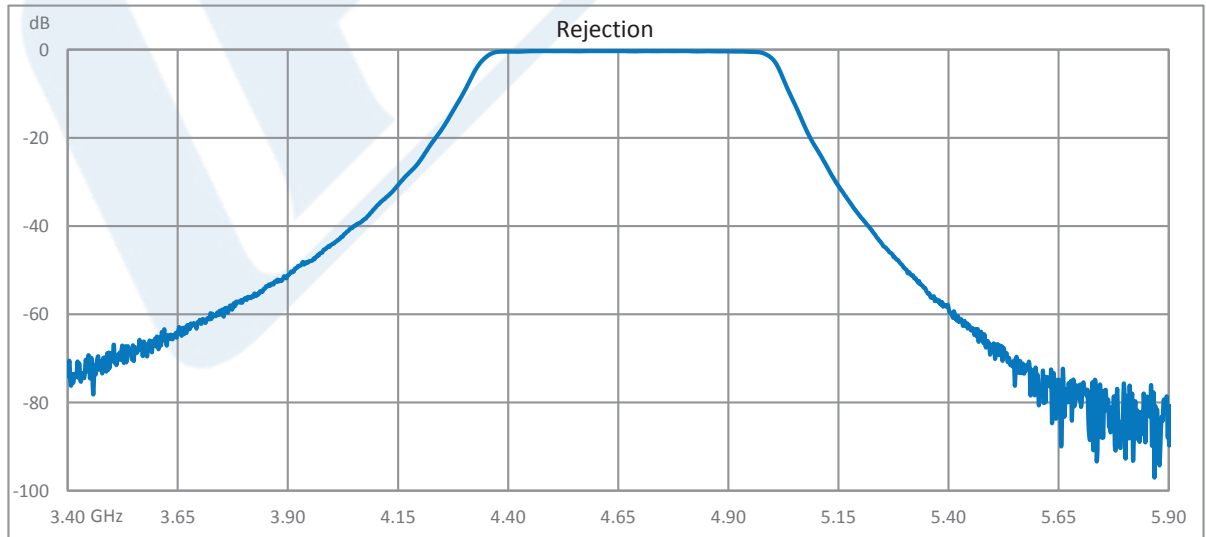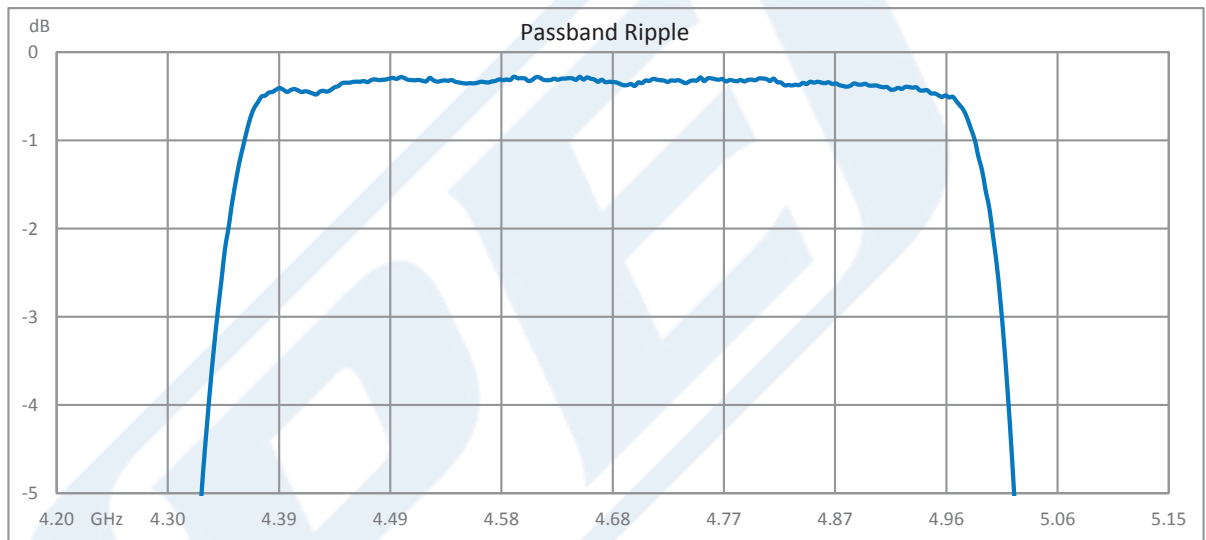


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 Section Bandpass Filter With SMA Female Connectors Operating From 4.4 GHz to 4.95 GHz With a 550 MHz Passband PE8739](#)



6 Section Bandpass Filter With SMA Female Connectors
Operating From 4.4 GHz to 4.95 GHz With a 550 MHz Passband

Bandpass Filters Technical Data Sheet

PE8739

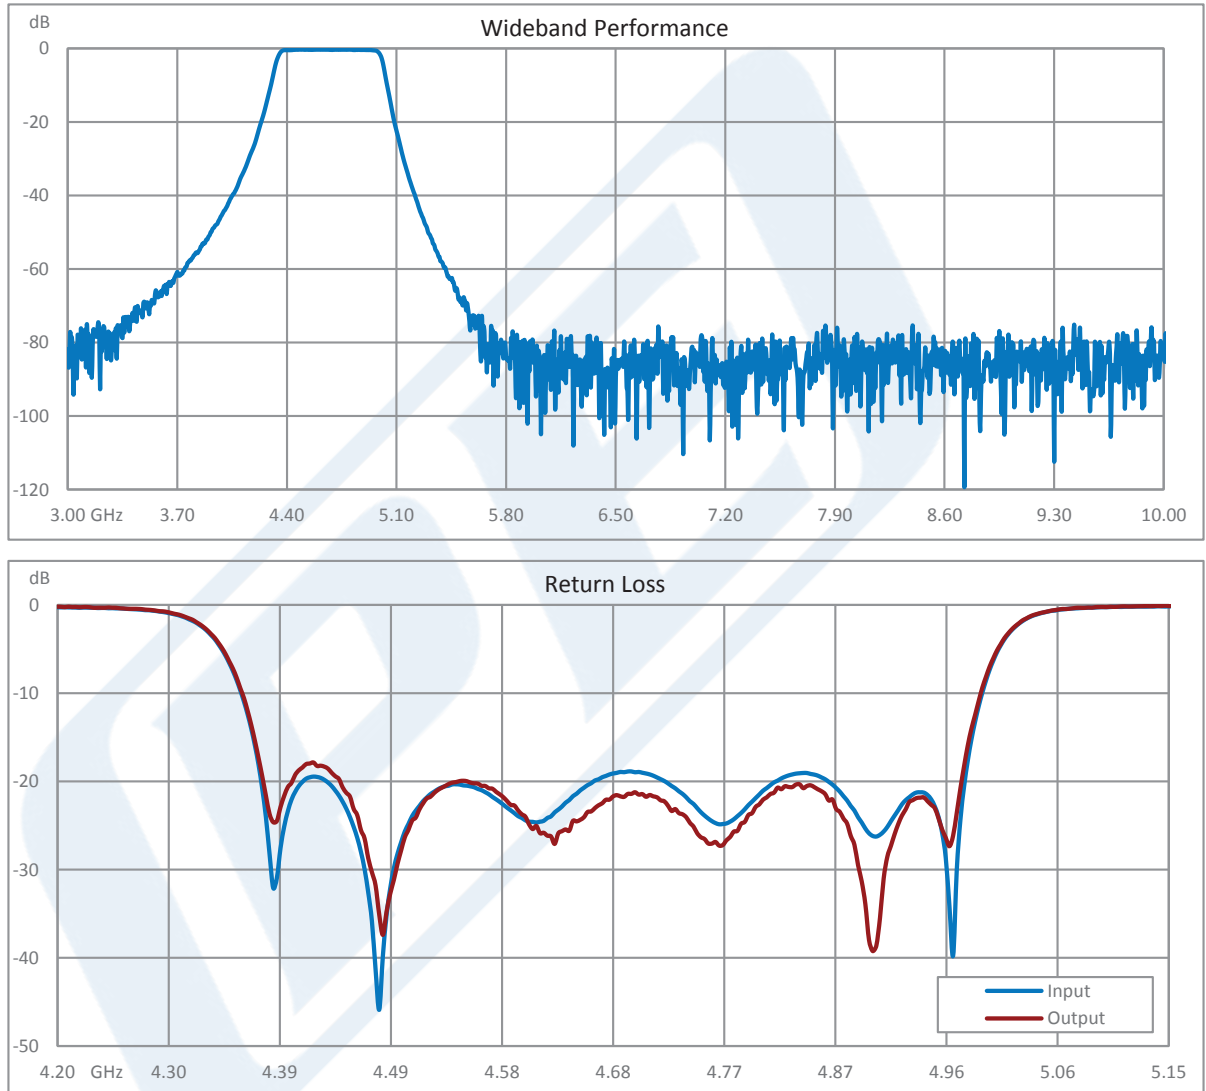

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 Section Bandpass Filter With SMA Female Connectors Operating From 4.4 GHz to 4.95 GHz With a 550 MHz Passband PE8739](#)



6 Section Bandpass Filter With SMA Female Connectors Operating From 4.4 GHz to 4.95 GHz With a 550 MHz Passband

Bandpass Filters Technical Data Sheet

PE8739

6 Section Bandpass Filter With SMA Female Connectors Operating From 4.4 GHz to 4.95 GHz With a 550 MHz Passband from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6 Section Bandpass Filter With SMA Female Connectors Operating From 4.4 GHz to 4.95 GHz With a 550 MHz Passband PE8739](http://www.pasternack.com/6-section-band-pass-filter-4.4-4.95-ghz-passband-550-mhz-pe8739-p.aspx)

URL: <http://www.pasternack.com/6-section-band-pass-filter-4.4-4.95-ghz-passband-550-mhz-pe8739-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PE8739 CAD Drawing

6 Section Bandpass Filter With SMA Female Connectors Operating From 4.4 GHz to 4.95 GHz With a 550 MHz Passband

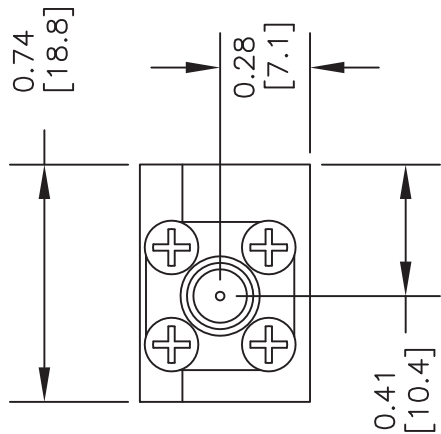

PASTERNAK
P/N: PE8739
4400-4950 MHz

LABEL

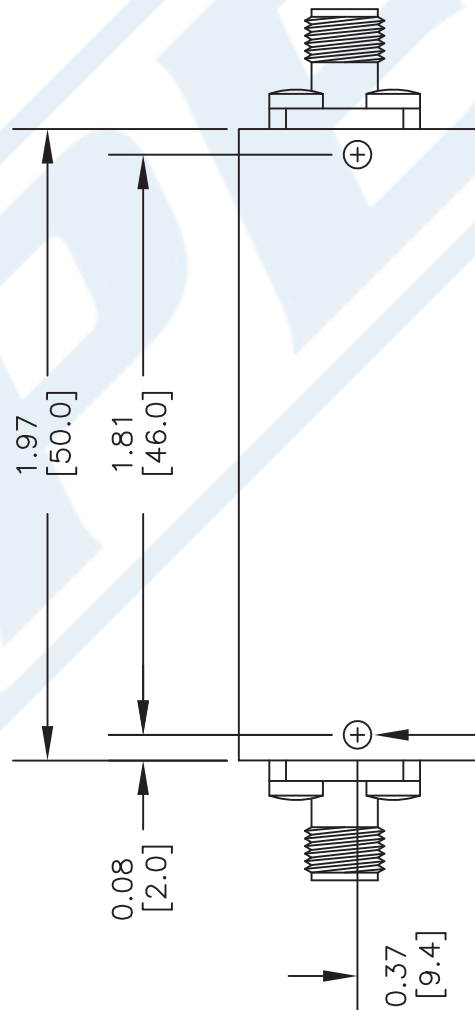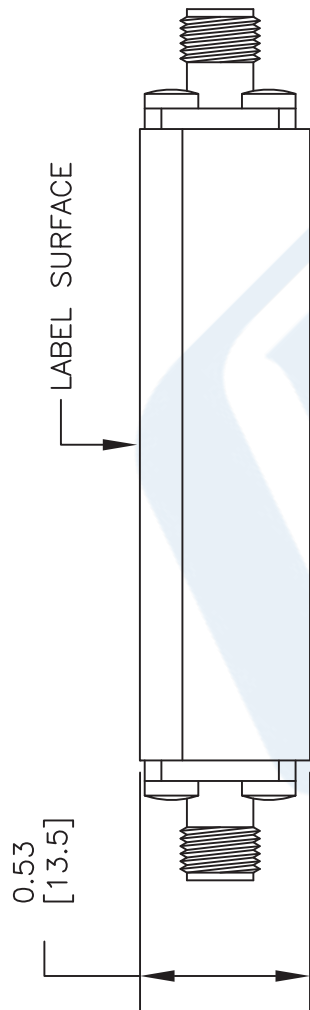

SMA
FEMALE
TYP.

2X MOUNTING (.086)
2-56 UNC-2B
.12 DEEP

STANDARD TOLERANCES
.X ±0.1
.XX ±0.01
.XXX ±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE8739

(PE) PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 030716

SCALE N/A

SIZE A

3045