

High Power, DC Pass

Power Splitter/Combiner

ZB2PD-63+

2 Way-0° 50Ω 30W 600 to 6000 MHz

The Big Deal

- Wideband, 600 to 6000 MHz
- High power, up to 30W as a splitter
- Low insertion loss, 0.8 dB
- Low unbalance, 0.15 dB, 2°
- High isolation, 19 dB



(N-Type Shown)

CASE STYLE: JJJ1457

Product Overview

Mini-Circuits' ZB2PD-63+ is a 2-way 0° high-power splitter/combiner providing up to 30W power handling as a splitter (1.0W as a combiner) and low insertion loss across the entire 600 to 6000 MHz frequency range. Its outstanding combination of high power handling and low loss minimize power dissipation and provide excellent signal power transmission from input to output. The ZB2PD-63+ comes housed in a rugged aluminum alloy case measuring 1.99 x 5.26 x 0.95" with your choice of SMA or N-type connectors.

Key Features

Feature	Advantages
Wideband, 600 to 6000 MHz	This model supports bandwidth requirements for a wide variety of applications.
High power handling: <ul style="list-style-type: none">• 30W to 3600 MHz• 20W to 6000 MHz	The ZB2PD-63+ is suitable for systems with a wide range of power requirements.
Low insertion loss, 0.8 dB	The combination of 30W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
Low unbalance: <ul style="list-style-type: none">• 0.15 dB amplitude unbalance• 2° phase unbalance	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
High isolation, 19 dB	Minimizes interference between ports.
DC Passing, 400mA (200mA each port)	Supports applications where DC power is needed through the RF line.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



High Power, DC Pass

Power Splitter/Combiner

ZB2PD-63+

2 Way-0° 50Ω 30W 600 to 6000 MHz

Maximum Ratings


Operating Temperature(@<30W)	-55°C to 60°C
Operating Temperature(@<10W)	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	400 mA (200mA for each port)

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2

Outline Drawing

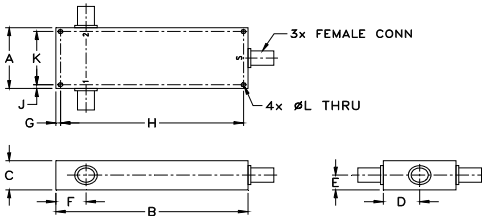

Outline Dimensions (inch/mm)

A	B	C	D	E	F
1.99	5.26	.95	1.00	.51	.83
50.55	133.60	24.13	25.40	12.95	21.08
G	H	J	K	L	wt
.13	5.010	.13	1.740	.125	grams
3.30	127.25	3.30	44.20	3.18	350.0

Features

- low insertion loss, 0.8 dB typ.
- wideband, 600 to 6000 MHz
- excellent amplitude unbalance, 0.15 dB typ.
- excellent phase unbalance, 2 deg. typ.
- up to 30W power input as splitter
- rugged shielded case

Applications

- UHF TV
- cellular/ISM/SMG/GSM
- satellite distribution
- GPS/L BAND (MARSAT)
- PCS/DCS/UMTS
- MMDC
- SATCOM
- Instrumentation



Generic photo used for illustration purposes only
(N-Type Shown)

CASE STYLE: JJJ1457

Connectors	Model
N-Type	ZB2PD-63-N+
SMA	ZB2PD-63-S+

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency		600		6000	MHz
Insertion Loss (above theoretical 3.0 dB)	600-1600	—	0.3	0.5	dB
	1600-2700	—	0.4	0.6	
	2700-3600	—	0.5	0.8	
	3600-6000	—	0.9	1.2	
Isolation	600-1600	16	19	—	dB
	1600-2700	16	19	—	
	2700-3600	17	21	—	
	3600-6000	12	15	—	
Phase Unbalance	600-1600	—	1.5	4	Degree
	1600-2700	—	2.4	5	
	2700-3600	—	2.6	7	
	3600-6000	—	4.6	9	
Amplitude Unbalance	600-1600	—	0.1	0.2	dB
	1600-2700	—	0.1	0.2	
	2700-3600	—	0.1	0.3	
	3600-6000	—	0.2	0.4	
VSWR (Port S)	600-1600	—	1.33	—	:1
	1600-2700	—	1.38	—	
	2700-3600	—	1.48	—	
	3600-6000	—	1.72	—	
VSWR (Port 1-2)	600-1600	—	1.23	—	:1
	1600-2700	—	1.26	—	
	2700-3600	—	1.48	—	
	3600-6000	—	1.53	—	
Power Handling³	As Splitter¹	600-3600	—	30	W
		3600-6000	—	20	
	As Combiner²	600-3600	—	1.0	

1. All outputs must terminate 50 ohm (VSWR 1.5:1 or better)
2. As a combiner of non-coherent signals, max. power per port is 1.0 watt power rating divided by number of ports.
3. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 60°C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heat sink to be 10°C/W.

Electrical Schematic



Notes




- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
600.00	3.11	3.12	0.01	26.85	0.12	1.13	1.07	1.12
700.00	3.13	3.13	0.01	21.82	0.14	1.07	1.09	1.07
1200.00	3.17	3.18	0.01	23.85	0.26	1.12	1.07	1.11
1600.00	3.23	3.24	0.01	26.05	0.37	1.14	1.21	1.13
1800.00	3.22	3.23	0.01	29.26	0.43	1.09	1.12	1.08
2700.00	3.32	3.30	0.02	22.99	0.77	1.15	1.19	1.17
3000.00	3.35	3.32	0.03	36.64	0.74	1.21	1.23	1.26
3600.00	3.36	3.35	0.02	26.45	0.71	1.15	1.09	1.16
3700.00	3.37	3.36	0.01	25.29	0.70	1.12	1.03	1.13
3800.00	3.36	3.37	0.00	25.45	0.72	1.11	1.02	1.12
5000.00	3.69	3.66	0.02	32.45	1.33	1.35	1.37	1.35
5800.00	3.74	3.63	0.10	19.25	1.82	1.35	1.43	1.34
6000.00	3.68	3.53	0.15	16.13	1.64	1.45	1.33	1.45

1. Total Loss = Insertion Loss + 3dB splitter loss.

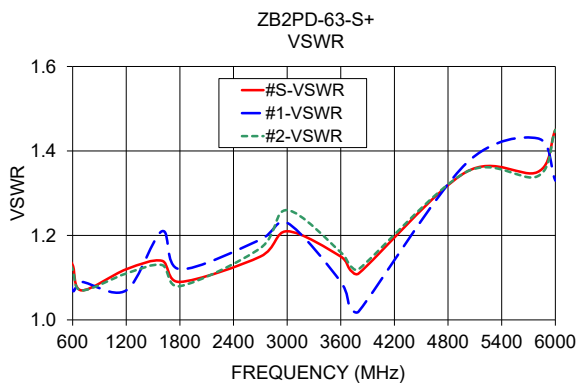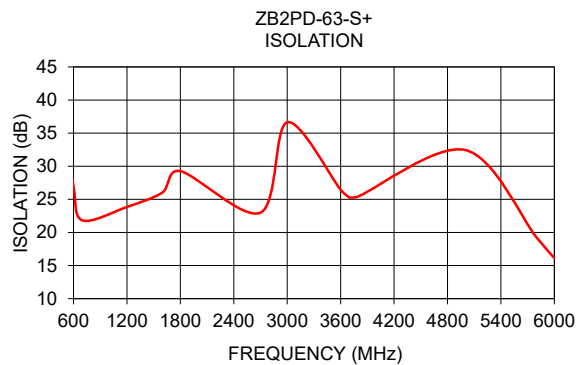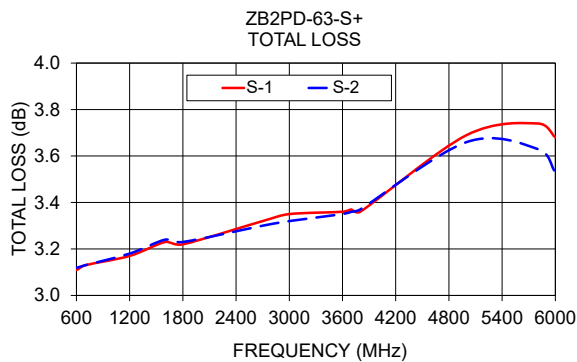

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

