

1,5 max.

Ø 0,1

1,89

5,6 3,2

3,18

Product description

M9 IP40 female panel mount connector, Contacts: 4, unshielded, dip-solder, IP40

Area Part no. M9 IP40 series 711 09 0082 32 04

### Illustration

**Conductor layout** 

Flexplatte

SW 10

Ø 11,5



### Scale drawing

### Contact arrangement (Plug-in side)


2,2

4

3

0,9

0

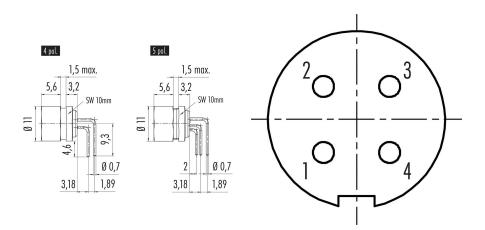

89

You can find the assembly instructions on the next page.

### **Technical data**

#### **General features**

| Part no.                  | 09 0082 32 04                |
|---------------------------|------------------------------|
| Connector design          | female panel mount connector |
| Version                   | connector female straight    |
| Connector locking system  | screw                        |
| Termination               | dip-solder                   |
| Degree of protection      | IP40                         |
| Temperature range from/to | -40 °C / 85 °C               |
| Mechanical operation      | > 500 Mating cycles          |



Product description

M9 IP40 female panel mount connector, Contacts: 4, unshielded, dip-solder, IP40

Area Part no. M9 IP40 series 711 09 0082 32 04

| Weight (g)            | 3.08     |
|-----------------------|----------|
| Customs tariff number | 85369010 |

### **Electrical parameters**

| Rated voltage             | 125 V                 |
|---------------------------|-----------------------|
| Rated impulse voltage     | 1500 V                |
| Rated current (40 °C)     | 3 A                   |
| Insulation resistance     | $\geq 10^{10} \Omega$ |
| Pollution degree          | 1                     |
| Overvoltage category      | II                    |
| Insulating material group | III                   |
| EMC compliance            | unshielded            |

#### Material

| Contact body material | PA (UL94 V-0)                        |
|-----------------------|--------------------------------------|
| Contact material      | CuSn (bronze)                        |
| Contact plating       | Au (gold)                            |
| REACH SVHC            | CAS 7439-92-1 (Lead)                 |
| SCIP number           | e6bee8ad-49ef-4251-b5bb-91d2f585bed4 |

#### Classifications

| eCl@ss 11.1 | 27-44-01-09 |
|-------------|-------------|
| ETIM 7.0    | EC003569    |



Product description

M9 IP40 female panel mount connector, Contacts: 4, unshielded, dip-solder, IP40

Area Part no. M9 IP40 series 711 09 0082 32 04



Product description

M9 IP40 female panel mount connector, Contacts: 4, unshielded, dip-solder, IP40

Area Part no. M9 IP40 series 711 09 0082 32 04




Product description

M9 IP40 female panel mount connector, Contacts: 4, unshielded, dip-solder, IP40

Area Part no. M9 IP40 series 711 09 0082 32 04

### Assembly instructions / Panel cut-out

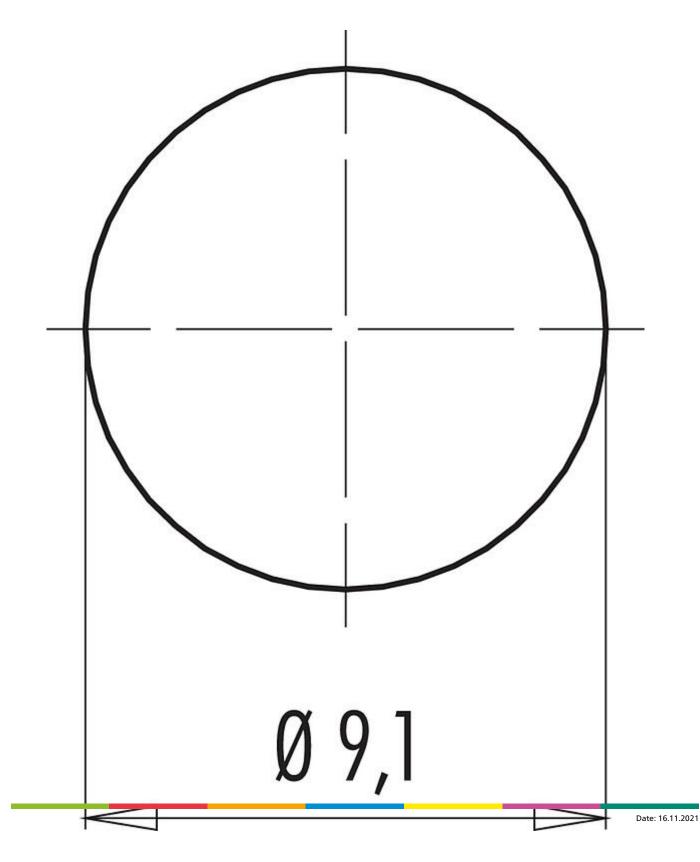



Product description

M9 IP40 female panel mount connector, Contacts: 4, unshielded, dip-solder, IP40

Area Part no. M9 IP40 series 711 09 0082 32 04

## **General Disclaim Notice**

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.