

Product description

RD24 Male panel mount connector, Contacts: 6+PE, unshielded, screw clamp, IP67, UL, ESTI+, VDE

Area Part no. RD24 series 693 09 4219 00 07


Illustration


Derating curve

Canant carrying capacity


Scale drawing







Contact arrangement (Plug-in side)



⊕ green∕yellow

You can find the assembly instructions on the next page.

Technical data

General features

Part no.	09 4219 00 07
Connector design	Male panel mount connector
Version	Connector pin straight
Connector locking system	screw
Termination	screw clamp
Degree of protection	IP67
Cross-sectional area	max. 1.50 mm² / AWG 16
Temperature range from/to	-40 °C / 100 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	22.07
Customs tariff number	85369010





Product description

RD24 Male panel mount connector, Contacts: 6+PE, unshielded, screw clamp, IP67, UL, ESTI+, VDE

Area Part no. RD24 series 693 09 4219 00 07

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	4000 V
Rated current (40 °C)	10 A (8 A UL)
Insulation resistance	$\geq 10^{10} \Omega$
Pollution degree	3
Overvoltage category	III
Insulating material group	III
EMC compliance	unshielded

Material

Housing material	РА
Contact body material	PBT
Contact material	CuZn (brass)
Contact plating	Ag (silver)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	fd9197fb-f6c0-4fee-9c34-a75941e93cd9

Authorization/approvals

Approvals	UL, ESTI+, VDE

Classifications

eCl@ss 11.1	27-44-01-09
ETIM 7.0	EC003569






Product description

RD24 Male panel mount connector, Contacts: 6+PE, unshielded, screw clamp, IP67, UL, ESTI+, VDE

Area Part no. RD24 series 693 09 4219 00 07

Assembly instructions / Panel cut-out

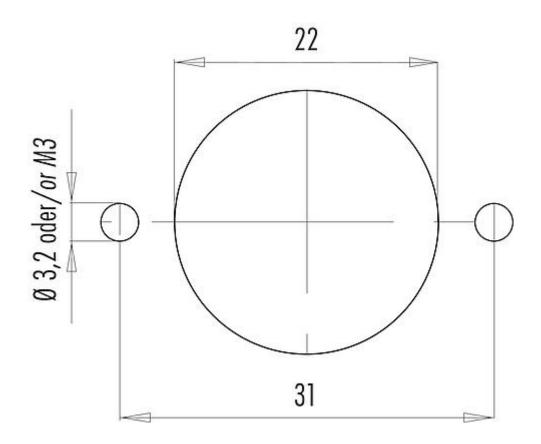





Product description

RD24 Male panel mount connector, Contacts: 6+PE, unshielded, screw clamp, IP67, UL, ESTI+, VDE

Area Part no. RD24 series 693 09 4219 00 07

General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

