## Subminiature connectors



Product description Micro Push-Pull IP67 Female panel mount connector, Contacts: 4, unshielded, solder, IP67


Area Micro Push-Pull IP67 series 420


Part no. **09 4712 00 04** 

#### Illustration

### **Scale drawing**

### Contact arrangement (Plug-in side)







You can find the component part drawing and assembly instructions on the next page.

#### **Technical data**

#### **General features**

Part no.	09 4712 00 04
Connector design	Female panel mount connector
Version	Connector socket straight
Connector locking system	Micro Push-Pull
Termination	solder
Degree of protection	IP67
Cross-sectional area	0.14 mm <sup>2</sup> / AWG 26
Temperature range from/to	-40 °C / 80 °C
Tightening torque screw nut	0.3 Nm
Mechanical operation	> 1000 Mating cycles
Weight (g)	1.55
Customs tariff number	85369010

### **Electrical parameters**

Rated voltage	125 V
Rated impulse voltage	1500 V
Rated current (40 °C)	1.0 A
Pollution degree	2
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

## Subminiature connectors



Product description Micro Push-Pull IP67 Female panel mount connector, Contacts: 4, unshielded, solder, IP67

Area Micro Push-Pull IP67 series 420

Part no. 09 4712 00 04


#### Material

Housing material	PA
Contact body material	PA
Contact material	CuSn (bronze)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	6dd9e9e0-cd84-4cf3-9627-83bc0ce018ac

#### Classifications

eCl@ss 11.1	27-44-01-09
ETIM 7.0	EC003569

### **Component part drawing**

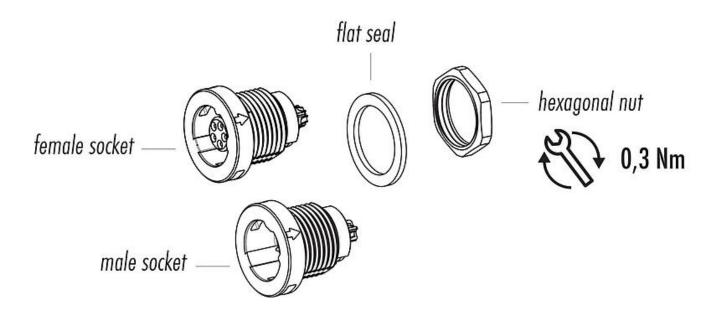

# Subminiature connectors




Product description Micro Push-Pull IP67 Female panel mount connector, Contacts: 4, unshielded, solder, IP67

Area Micro Push-Pull IP67 series 420

Part no. 09 4712 00 04

## Assembly instructions / Panel cut-out

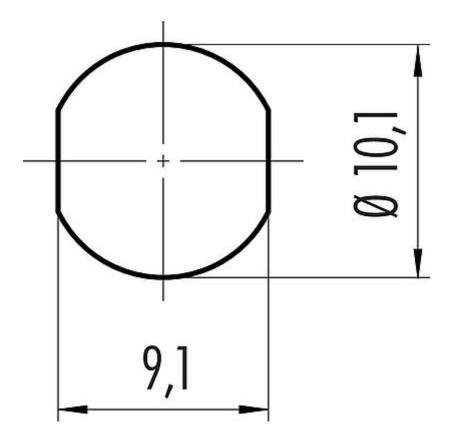

## Subminiature connectors



Product description Micro Push-Pull IP67 Female panel mount connector, Contacts: 4, unshielded, solder, IP67

Area Micro Push-Pull IP67 series 420

Part no. 09 4712 00 04

#### **General Disclaim Notice**

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.