

ONLY FOR USE IN TOXIC ENVIRONMENTS


NICOTRA S.P.A.

FAN TEST LABORATORY

AMCA STANDARD 210/85 Fig. 12

10000 m³/h CHAMBER

TYPE	DD 185/240	NATT	1000	AMP MAX	7.6
MOTOR	141953/3	VOLT	230	PROT. IP	20
TEST	2463.800	HZ	50	T.H.	YES in
DATE	22/05/00	mmF	20	Vc	450
				INS.CL.	B
				POLES	2
GAMMA = 1.214 Kg/m ³					
Installation type : free inlet & ducted outlet					
db(A) free field noise measurements at m 1					

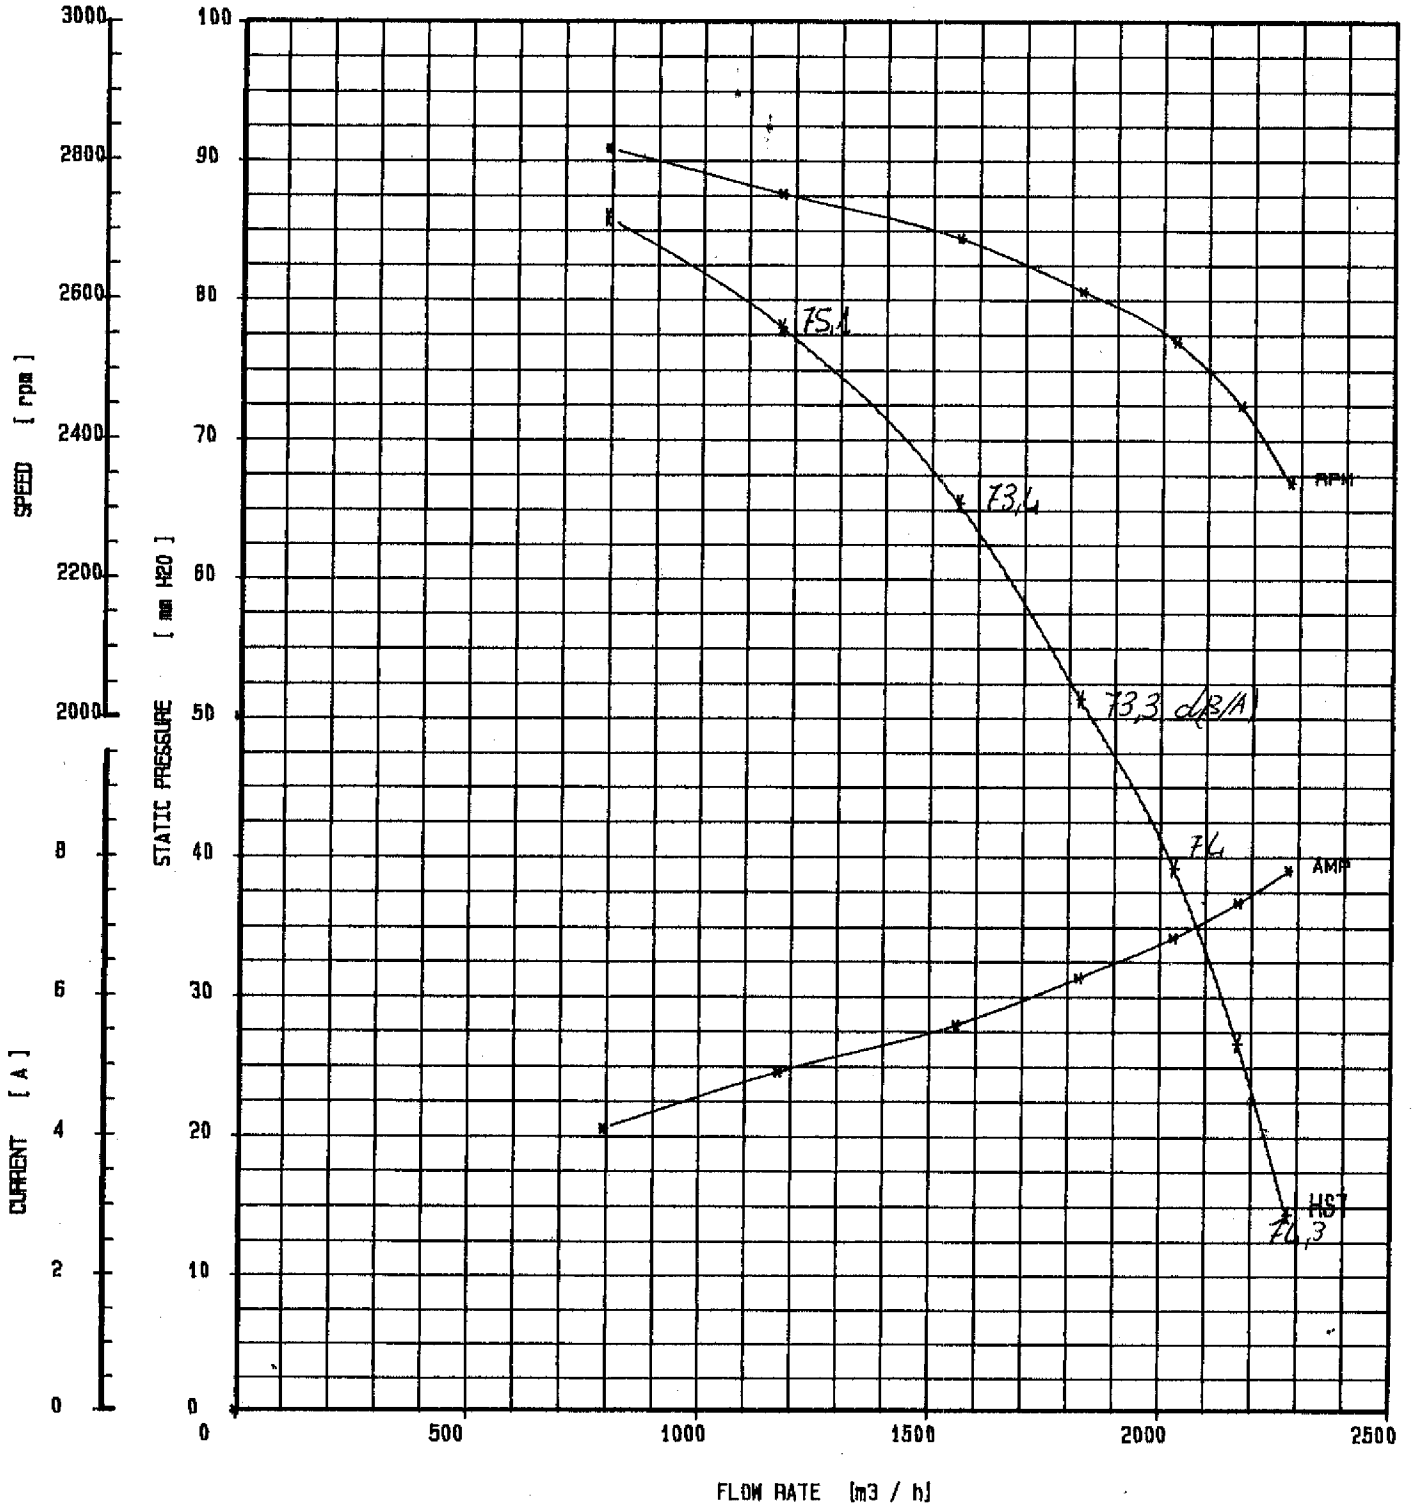

This test data obtained in a laboratory registered by AMCA, for AMCA 210 Air performance testing.
Data is not certified by AMCA.