

Coaxial Low Pass Filter

NON-CATALOG

BBLP-117+
BBLP-117

50Ω Flat Time Delay DC to 65 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Features

- flat group delay for low pulse distortion
- rugged shielded case
- other BBLP models available with wide selection of cut-off frequencies

Applications

- linear modulation techniques
- voice transmission applications
- digital communications



CASE STYLE: FF55

Connectors	Model	Price	Qty.
BNC	BBLP-117(+)	Contact Sales Dept.	


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications


PASSBAND (MHz)	fco, MHz Nom.	STOPBAND (MHz)		VSWR (:1)		GROUP DELAY VARIATION (nsec)		
		(loss > 10 dB)	(loss > 20 dB)	DC-2fco	DC-0.6fco	DC-fco	DC-2fco	DC-3.67fco
DC-65	117	234-312	312	1.3:1	2.4:1	0.35	1.4	1.9

Outline Drawing

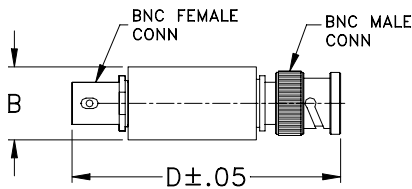


Outline Dimensions (inch/mm)

B	D	wt
.54	2.59	grams
13.72	65.79	40.0



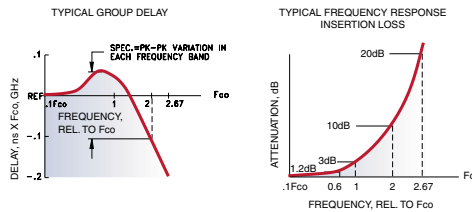


Electrical Schematic

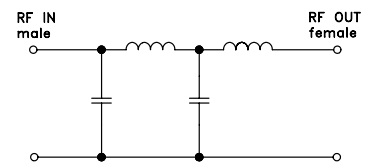

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	\bar{x}	σ			
1.0	0.02	0.1	35.3	1.0	3.075
23.0	0.15	0.1	16.8	12.0	3.015
33.0	0.26	0.1	13.8	23.0	3.252
44.0	0.42	0.1	11.5	33.0	3.331
55.0	0.65	0.1	9.6	44.0	3.126
65.0	0.90	0.1	8.3	55.0	3.140
66.0	0.92	0.1	8.2	65.0	3.044
100.0	1.96	0.1	4.8	66.0	3.271
117.0	2.80	0.1	3.5	83.0	3.303
118.0	2.86	0.1	3.5	100.0	3.348
152.0	5.63	0.1	1.9	117.0	3.233
185.0	8.79	0.2	1.2	118.0	3.593
201.0	10.40	0.2	0.9	135.0	3.409
218.0	12.20	0.2	0.7	152.0	2.782
234.0	13.99	0.2	0.5	168.0	2.798
235.0	14.10	0.2	0.5	185.0	2.689
257.0	16.54	0.3	0.3	201.0	2.681
279.0	18.92	0.4	0.3	218.0	2.252
290.0	20.08	0.5	0.2	234.0	2.060
301.0	21.23	0.5	0.2	235.0	2.038
312.0	22.36	0.6	0.2	246.0	1.965
313.0	22.46	0.6	0.2	257.0	1.759
361.0	27.82	0.7	0.2	268.0	1.562
409.0	32.27	0.9	0.2	279.0	1.358
457.0	35.79	1.0	0.2	290.0	1.372
505.0	39.52	1.3	0.2	301.0	1.483
529.0	41.10	1.4	0.2	312.0	1.659
553.0	42.74	1.6	0.2	313.0	1.765
577.0	44.30	1.5	0.3	337.0	1.324
600.0	45.95	2.0	0.3	361.0	1.555

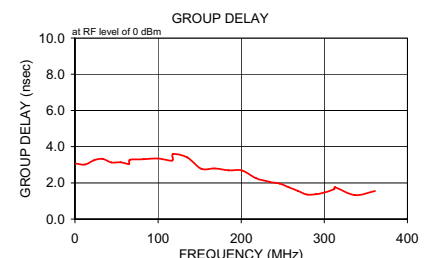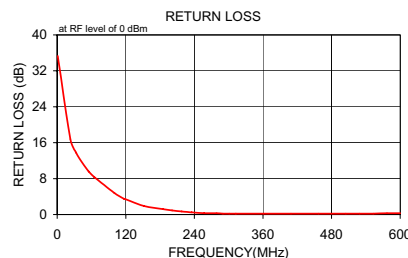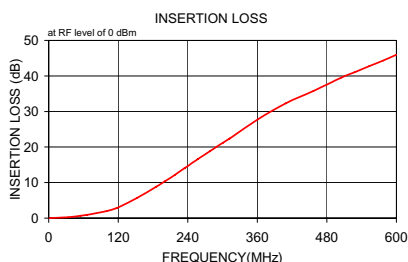

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. A
M98898
BBLP-117
070509