

Surface Mount Bandpass Filter

BPF-C670+

50Ω 470 to 870 MHz

The Big Deal

- Wide passband
- Good VSWR (1.4:1 typical)
- High rejection (50 dB typical)
- Flat group delay (4 ns typical)
- Sharp roll-off
- Miniature shielded package



CASE STYLE: HU1186

Product Overview

The BPF-C670+ is a band pass filter fabricated using SMT technology and built into a shielded case (size of 0.87" x 0.80" x .25"). Covering 670 MHz \pm 200 MHz band width, this model is suited for Digital TV application. These units offer good matching within the passband and high rejection. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability. In addition it has repeatable performance across production lots and consistent performance across temperature.

Key Features

Feature	Advantages
Sharp shape factor, 1.1	Sharp shape factor helps in adjacent channel rejection and hence increased selectivity.
Good VSWR, 1.4:1 over passband	This provides well matched input and output ports.
More than 50 dB rejection up to 2100MHz	This enables the filter to attenuate spurious signals and reject harmonics for broad band of frequency.
Flat group delay characteristics.	This model has a group delay flatness of 4 ns which helps in reducing the signal distortion.
Shielded case	Reduced interference with and from the surrounding components.

 **Mini-Circuits**[®]
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 *The Design Engineers Search Engine*  Provides ACTUAL Data Instantly at minicircuits.com

IFIRF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Surface Mount Bandpass Filter

BPF-C670+

50Ω 470 to 870 MHz



CASE STYLE: HU1186
PRICE: \$29.95 ea. QTY (1-9)

Features

- High rejection, 50 dB typical
- Good VSWR, 1.4:1 typical over passband
- Sharp insertion loss roll-off
- Shielded case
- Aqueous washable

Applications

- Digital TV
- Harmonic rejection
- Transmitters / receivers

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	670	—	MHz	
	Insertion Loss	F1-F2	470 - 870	—	2.0	2.8	dB
	VSWR	F1-F2	470 - 870	—	1.4	1.8	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 365	20	40	—	dB
	VSWR	DC-F3	DC - 365	—	29	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	965 - 2700	20	30	—	dB
	VSWR	F4-F5	965 - 2700	—	18	—	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.7W max.

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

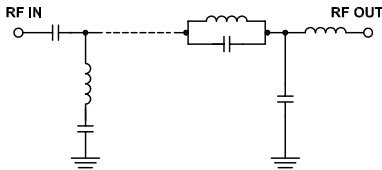

Typical Frequency Response




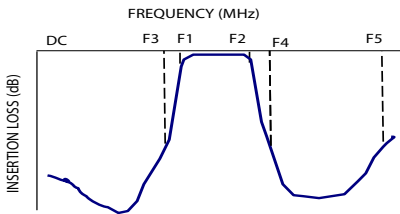


Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1.0	92.72	1737.18	470.0	6.14
50.0	56.79	5124.42	500.0	4.57
300.0	49.71	108.58	525.0	3.96
365.0	56.55	48.26	550.0	3.59
400.0	20.38	24.83	580.0	3.31
410.0	14.61	17.22	600.0	3.19
425.0	7.25	7.11	620.0	3.13
440.0	2.79	2.61	630.0	3.12
450.0	1.60	1.66	640.0	3.11
470.0	0.94	1.18	660.0	3.11
670.0	0.71	1.18	670.0	3.11
870.0	1.74	1.28	680.0	3.12
885.0	3.02	2.00	700.0	3.13
900.0	6.77	4.84	740.0	3.29
920.0	13.98	12.01	760.0	3.47
965.0	31.63	20.95	780.0	3.70
1010.0	56.87	22.87	800.0	4.00
1500.0	81.29	31.03	840.0	4.79
2000.0	72.59	27.59	850.0	5.18
2700.0	45.58	19.32	870.0	7.04

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

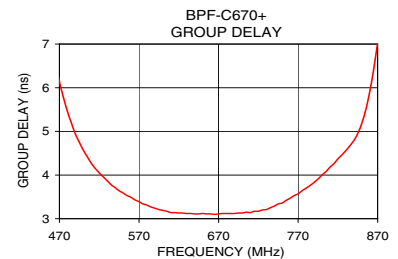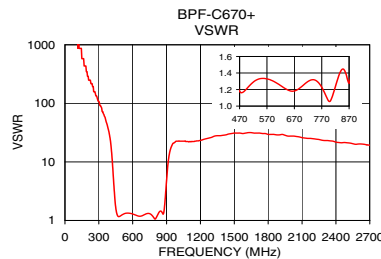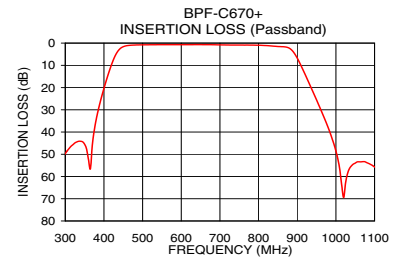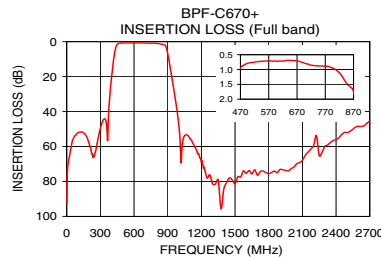

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

Pad Connections

INPUT	2
OUTPUT	9
NOT CONNECTED	6,13
GROUND	1,3,4,5,7,8,10,11,12,14

Demo Board MCL P/N: TB-500+
Suggested PCB Layout (PL-294)

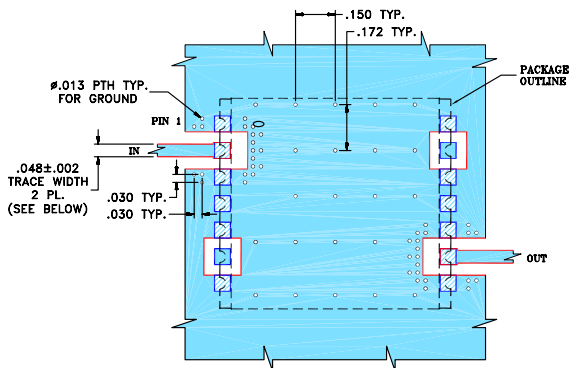


NOTES:


- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B.
 DIELECTRIC THICKNESS: .030" ± .002";
 COPPER: 1/2 OZ ON EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

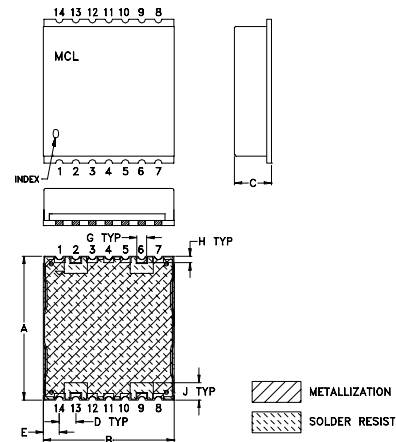

PCB Land Pattern



Suggested Layout,
 Tolerance to be within ±.002

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H
.870	.800	.25	.100	.097	--	.060	.040
22.10	20.32	6.35	2.54	2.46	--	1.52	1.02
J	K	L	M	N	P	wt	
.105	.910	--	.060	.060	--	grams	
2.67	23.11	--	1.52	1.52	--	2.85	