

SUMMARY

Wires

Low voltage 2




Image is for illustrative purpose only

Series 3S
Termination type Male solder
IP rating 50
AWG wire size 14.00 - 14.00
Cable Ø 5.80 - 7.20 mm
Status active
Matching parts [ERA.3S.302.CLL](#)

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model FZP*: Straight plug for remote handling, cable collet and inner anti-rotating device
Keying Hermaphroditic keying (half moon insert) with male pin 1
Housing Material Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Weight 87.66 g

Performance

Configuration 3S.302 : 2 Low Voltage
Insulator L: PEEK (UL 94 / V-0/1.5)
Rated Current 23 Amps

Specifications

Contact Type: Solder
Vtest: 3000 V (AC), 4200 V (DC)

Others


Endurance (Shell): 5000 mating cycles
Temp (min / max): -55°C / +250°C
Humidity (max): <=95% [at 60 deg C / 140 F]
Vibration: 15 g [10 Hz - 2000 Hz]

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Shock Resistance: 100 g [6 ms]
 Climatical Category: 50/175/21
 Shielding (min): 75 dB (10 MHz)
 Shielding (min): 40 dB (1 GHz)
 Salt Spray Corrosion: >144 hr

DRAWINGS

Draws

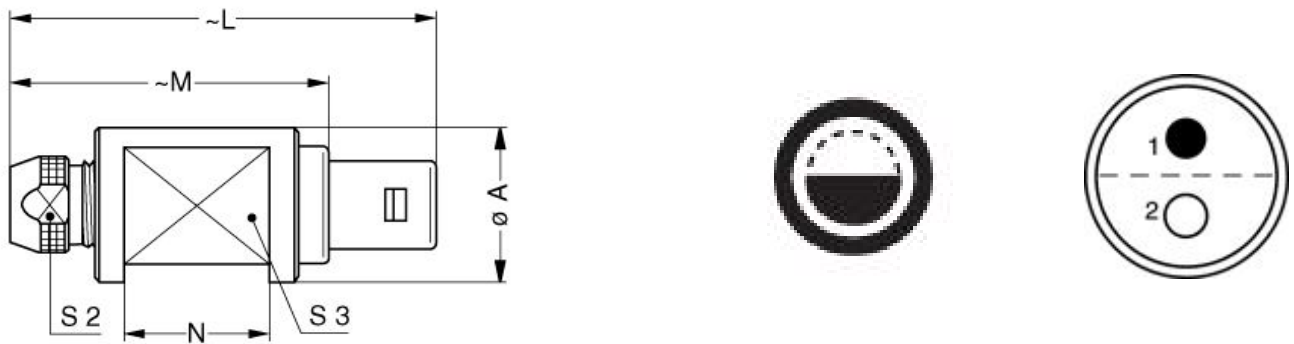

Dimensions

	A	L	M	N	S2	S3
mm.	24	61	46	24	14	18
in.	0.94	2.40	1.81	0.94	0.55	0.71

RECOMMENDED BY LEMO






Tools

Spanner wrench: [MTZ.3S.500.014](#)

Cables

CMN.02.T14.072PGCE	PVC	GREY	
CMN.02.T14.072PGZE		Grey	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

CMN.02.T14.072PNCE	PVC	Black	
CMN.02.T14.072PNZE		Black	
CMN.02.T14.072QGZE	TPR (medical)	Grey	
CMN.02.T18.064UNCU			
220 151	PVC	Grey	
220 750	PVC	Grey	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.