


## FCPC-FCPC-D600\_100P

### Description

FC adaptor, SM, APC, small key, metal, with 2-hole flange

#### Features

- Threaded nut connector
- High mechanical and thermal resistance according to Telcordia GR-326-CORE
- with 2-hole flange, 4mm thick key width: 2.05mm

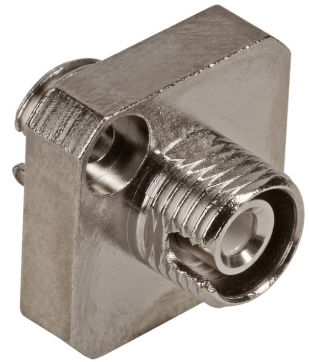

### Technical Data

#### General Data

Characteristics	Values
Specified acc. to	IEC 61754-13, TIA 604-4-A
Adaptor family	FCPC
Adaptor type	APC (small key),
Weight in kg	0.0106
Material	Metal
Color of housing	Metal

#### Mechanical Data

Characteristics	Values
Operating temperature min. (°C)	-40
Operating temperature max. (°C)	85
Min. mating cycles	1000

#### Optical Data


Characteristics	Values
IL repeatability (dB)	0.1

#### Environment Data

Characteristics	Values
RoHS compliant	Yes
REACH compliant	Yes
UV resistant	Yes
Flammability rating	UL 94 V-0
Free of halogen	Yes

FCPC-FCPC-D600\_100P

## Technical drawing

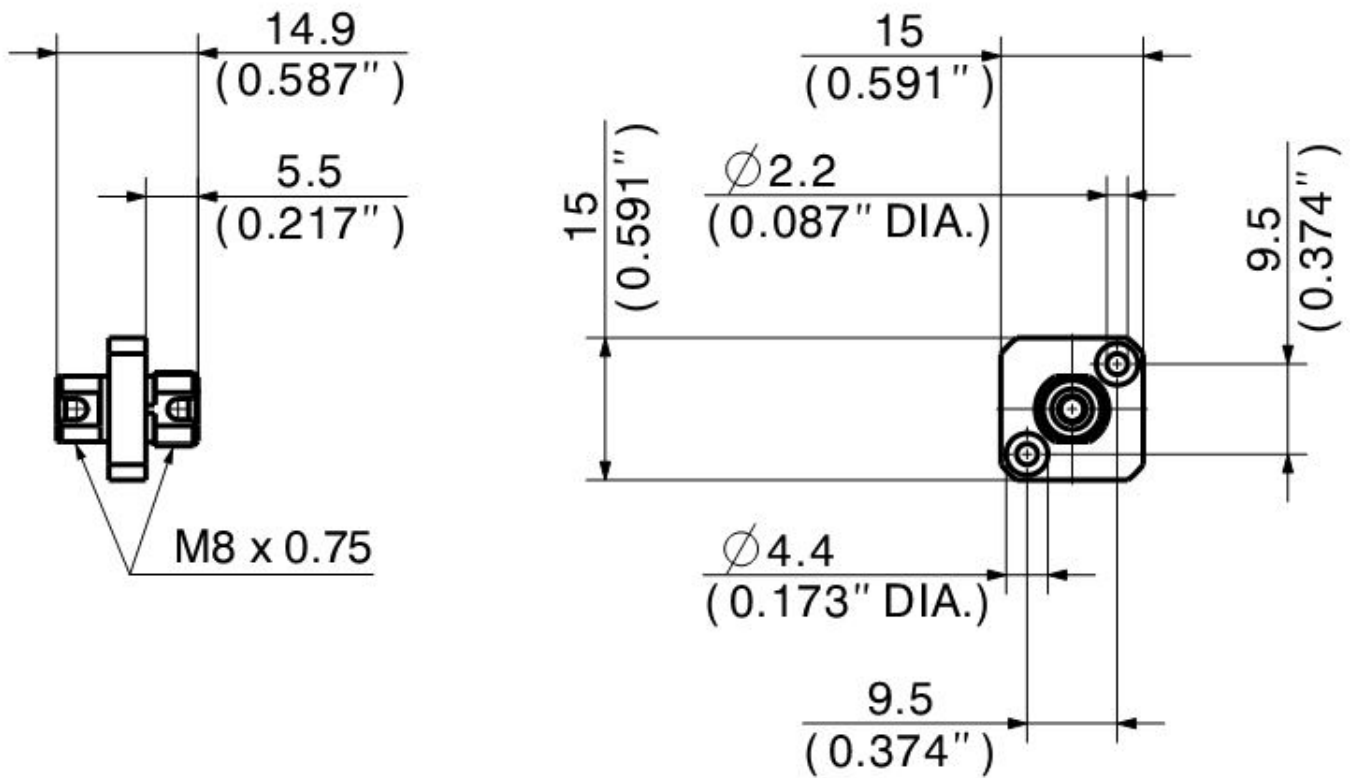

## Ordering information

Description	Item number
FCPC-FCPC-D600_100P	22659163