

## PCDS\_SCMS\_SCMS\_O120E\_XX.X\_MM

### Description

Duplex patch cord, SC simplex to SC simplex, MM, duplex fig.8 2x2.0mm\_XX.X\_orange, OM1



Features	Features
- Push-pull connector	
- One-piece design for easy and quick termination	
- High mechanical and thermal resistance according to Telcordia GR-326-CORE	

### Technical Data

#### General Data

Description	Values
General Typ	Duplex SC patch cord
Operation temperature	-25 up to 70°C
Polarity	A-B / B-A straight polarity (standard)
UL Rating	UL 94 V-0
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes

#### Connector left

Description	Values
Connector typ	SC simplex
Polish	UPC
Color Housing	Beige
Color Boot	Black / Red
Design connector acc. To	IEC 61754-4, TIA 604-3
Performance class H+S	M
Insertion loss 97% dB / mean dB	0.25 / 0.12
Return Loss	35
Durability	1000
Tensile load	2 x 100 N
Tensile load acc. To GR-326-COR	Fullfilled

#### Connector right


Description	Values
Connector typ	SC simplex
Polish	UPC
Color Housing	Beige
Color Boot	Black / Red
Design connector acc. To	IEC 61754-4, TIA 604-3
Performance class H+S	M
Insertion loss 97% dB / mean dB	0.25 / 0.12
Return Loss	35
Durability	1000
Tensile load	2 x 100 N
Tensile load acc. To GR-326-COR	Fullfilled

## PCDS\_SCMS\_SCMS\_O120E\_XX.X\_MM

### Cable

Description	Values
Cable typ	Duplex Cable Figure 8
Fiber count	2
Fiber	2 x 0.9 mm
Fiber typ	G62.5/125-OM1 G.651
Outer diameter	2 mm

### Technical Drawing

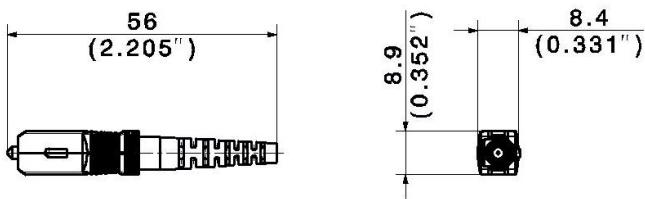

### Ordering information

Meter (m)	Item number	Description
2	85031168	PCDS_SCMS_SCMS_O120E_02.0_MM