


DIRECTIONAL COUPLERS

Designer's Kit K3-DBTC-L+

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
 THE SOLUTION!

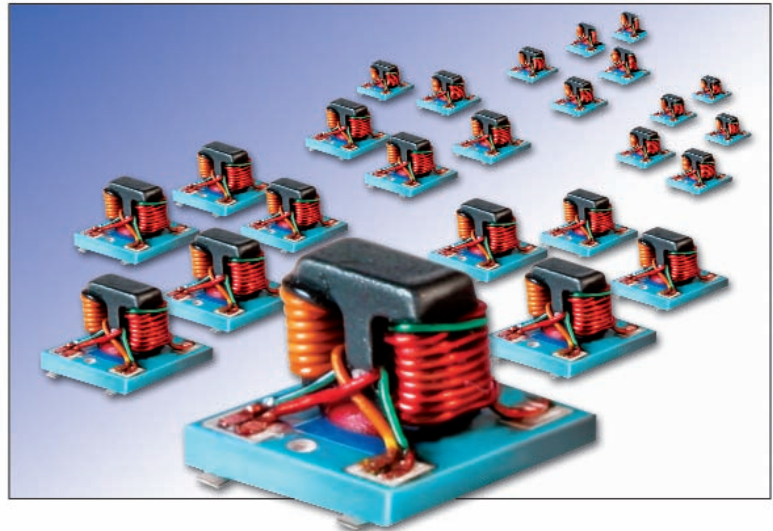

5 to 2000MHz

DBTC-L+ Features

- Very flat 9 to 20dB coupling
- Very broadband, multi-octave, 50Ω
- Temperature stable LTCC base
- All welded construction
- Micro-miniature package with leads (L).166" x (W).150" x (H).155"



only **\$54⁹⁵** ea. kit (5 models, 5 of each, 25 total)

Kit K3-DBTC-L+ Electrical specifications of each model

Model	Freq. (MHz) f _L -f _U	Coupling (dB)		Mainline Loss* (dB)						Directivity (dB)			VSWR (:1) Typ.	Power Input (W)				
		Nom.	Max. Flatness	L		M		U		L		M		U	L Max.	MU Max.		
				Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.		Min.			Typ.	Min.
DBTC-9-4L+	5 - 1000	9.0±0.5	±0.5	1.2	2.0	1.2	1.8	1.5	2.0	21	17	18	13	15	—	1.20	0.5	1.0
DBTC-12-4L+	5 - 1000	12.2±0.5	±0.9	0.9	1.8	0.7	1.3	1.1	1.6	33	22	21	14	15	—	1.20	0.5	1.0
DBTC-13-4L+	5 - 1000	13.0±0.5	±0.6	0.7	1.3	0.7	1.3	1.1	1.6	21	17	18	13	13	—	1.20	0.5	1.0
DBTC-17-5L+	50 - 2000	17.7±0.9	±1.0	0.9	1.4	0.9	1.4	1.1	1.6	20	13	20	13	14	—	1.20	—	2.0
DBTC-20-4L+	20 - 1000	20.4±0.6	±0.8	0.3	1.0	0.4	1.0	0.7	1.3	21	13	21	14	16	—	1.20	1.0	1.0

L = low range [f_L to 10f_L] M = mid range [10f_L to f_U/2] U=upper range [f_U/2 to f_U]

Protected under U.S. Patents 6,140,887 & 6,784,521
 *Includes the theoretical power loss due to coupling.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF MICROWAVE COMPONENTS

REV. OR
 M105157
 K3-DBTC-L+