Product data sheet Miniature connectors



Product description

M16 Male cable connector, Contacts: 7 (07-b), 4.0-6.0 mm, shieldable, solder, IP67, UL


Area Part no. M16 IP67 series 423 99 5181 00 07


Illustration

Scale drawing

Contact arrangement (Plug-in side)







You can find the assembly instructions on the next page.

Technical data

General features

Part no.	99 5181 00 07
Connector design	Male cable connector
Type standard	DIN EN 61076-2-106
Version	Connector pin straight
Connector locking system	screw
Termination	solder
Degree of protection	IP67
Cross-sectional area	max. 0.75 mm² / AWG 18
Cable outlet	4.0-6.0 mm
Temperature range from/to	-30 °C / 95 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	49.47
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	800 V
Rated current	5.0 A
Insulation resistance	≥ 10¹\l Ω
Pollution degree	1
Overvoltage category	1
Insulating material group	III
EMC compliance	shieldable
Shield connection	cable clamp

Product data sheet Miniature connectors



Product description

M16 Male cable connector, Contacts: 7 (07-b), 4.0-6.0 mm, shieldable, solder, IP67, UL

Area Part no. M16 IP67 series 423 99 5181 00 07


Material

Housing material	CuZn (Brass nickel plated)
Contact body material	PBT (UL94 V-0)
Contact material	CuZn (brass)
Contact plating	Ag (silver)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	c4929cfb-38fa-4cd9-9db5-d8568c1395ea

Authorization/approvals

Approvals	UL
Classifications	
eCl@ss 11.1	27-44-01-02
ETIM 9.0	EC002635
Declarations of conformity	
Low Voltage Directive	2014/35/EU (EN 60204-1:2018;EN 60529:1991)

Assembly instructions

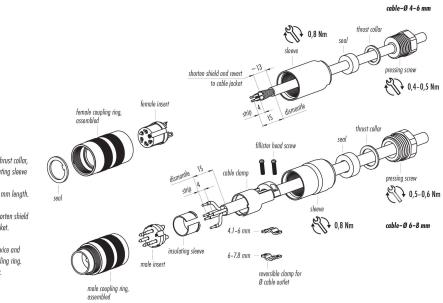

- Bead pressing screw, thrust collar, seal, sleeve and insulating sleeve to cable.
- 2. Dismantle cable to 15 mm length.
- 3. Strip single wires.
- If cable is shielded, shorten shield and revert to cable jacket.
- 5. Solder single wires.
- Soluer single wries.
 Assemble clamping device and
- screw sleeve into coupling ring.
- 7. Tighten pressing screw.

Product data sheet Miniature connectors



Product description

M16 Male cable connector, Contacts: 7 (07-b), 4.0-6.0 mm, shieldable, solder, IP67, UL

Area Part no. M16 IP67 series 423 99 5181 00 07

General Disclaim Notice

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 50 cNm).

