


AD4006 SERIES

External Dimensions

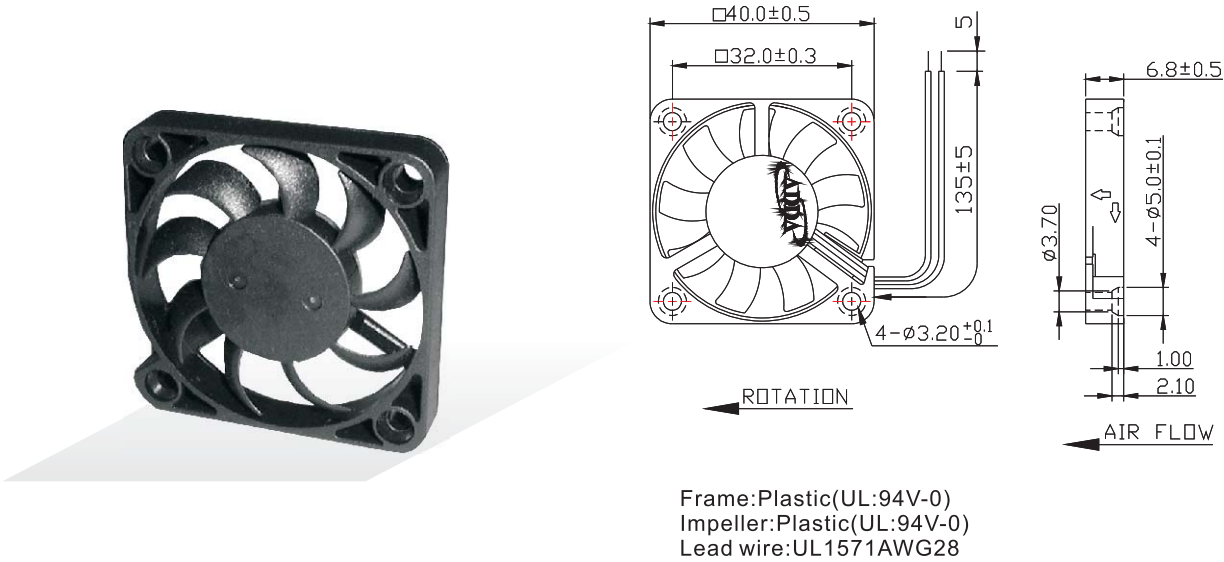

Specifications(Nominal)


*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ○=Ball ※=Sleeve ◯=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
40x40x06	AD0405LX-K90(X)	○ ●	5	0.04	0.20	4800	0.119	4.220	0.048	1.210	22.0	9.0
	AD0405MX-K90(X)	○ ●	5	0.07	0.35	5800	0.144	5.100	0.070	1.770	27.6	
	AD0405HX-K90(X)	○ ●	5	0.10	0.50	6600	0.164	5.800	0.090	2.280	31.0	
	AD0412LX-K90(X)	○ ●	12	0.04	0.48	4800	0.119	4.220	0.048	1.210	22.0	
	AD0412MX-K90(X)	○ ●	12	0.05	0.60	5800	0.144	5.100	0.070	1.770	27.6	
	AD0412HX-K90(X)	○ ●	12	0.06	0.72	6600	0.164	5.800	0.090	2.280	31.0	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以參考為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

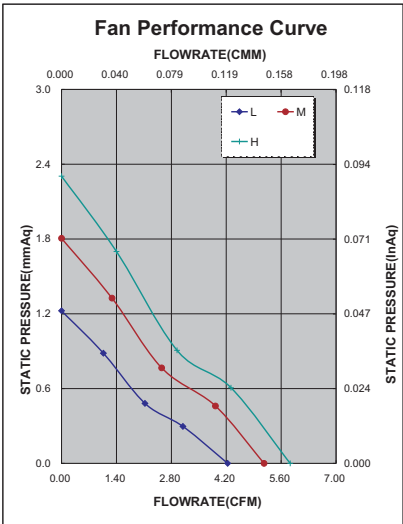

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

				
✓	✓		✓	✓

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ADDA:](#)

[AD0405HX-J90\(CWY13X\)-LF](#) [AD0405MX-KC3\(Y9\)-LF](#) [AD0412HB-K96\(S\)-LF](#) [AD0405MX-KC3\(Y15X\)-LF](#)
[AD0405MX-KC3\(Y13NX\)-LF](#)