


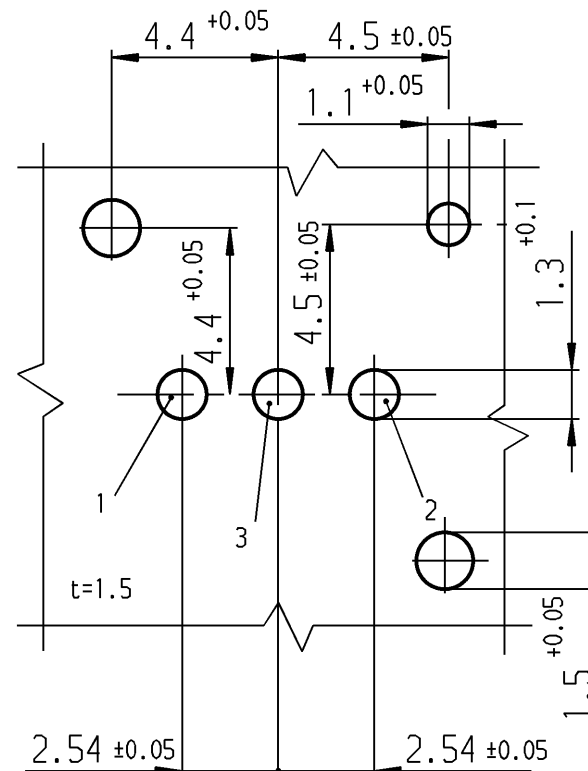
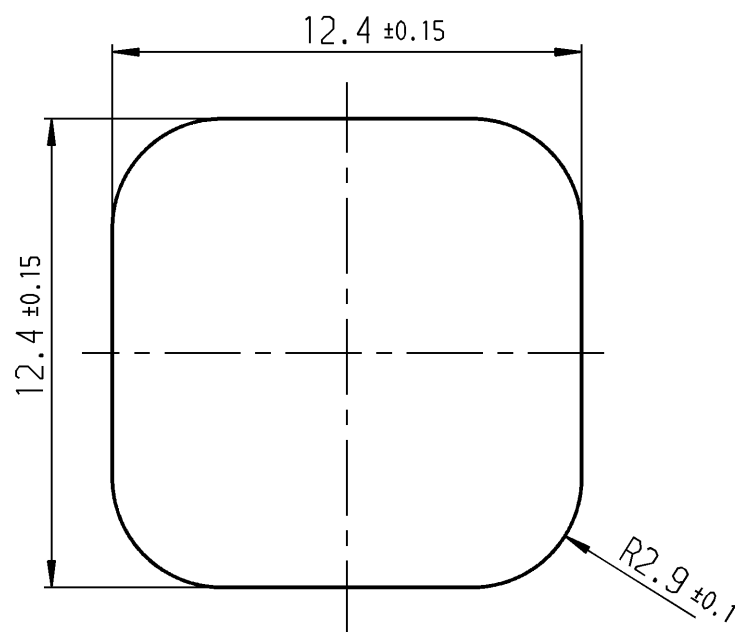


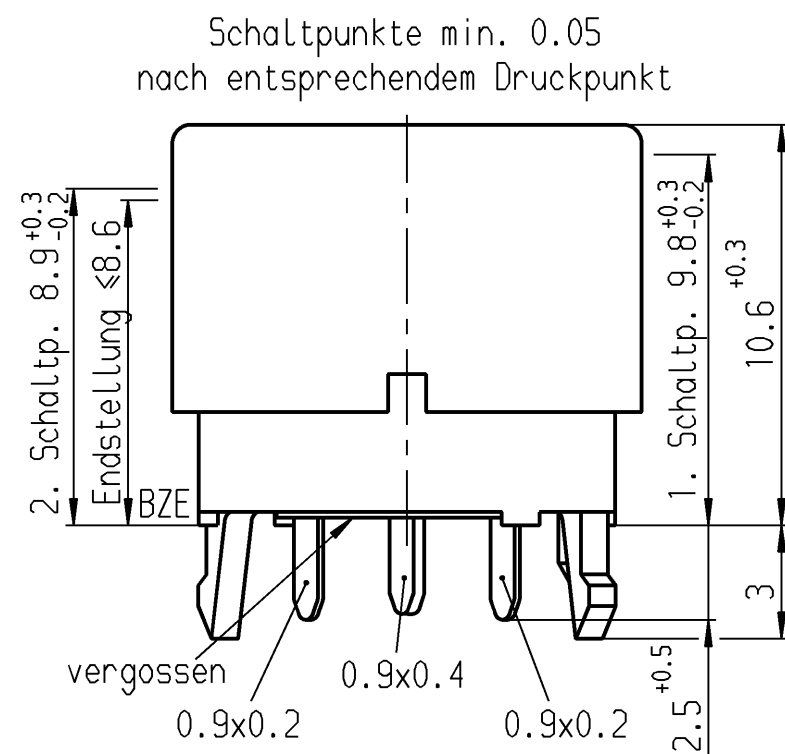

Empfohlenes Lochbild
(Bestückungsseite)



Aufschrift
auf Verpackung: 29400468750011

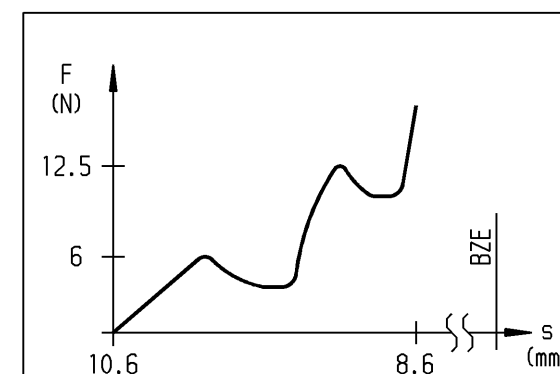

Schließer 2-polig
mit Druckpunkt (2)

Schaltspannung max. 28V
Schaltstrom max. 30mA
Druckpunktkraft 1 5-7N
Druckpunktkraft 2 11-14N
Betätigungsgeschw. 10mm/sec
Anschlüsse verzinkt

Diese Unterlage ist geistiges
Eigentum der Marquardt GmbH.
Schutzvermerk nach DIN 34
beachten. Copyright reserved.

ALLgemeintoleranzen/UNTOLERANCED DIMENSIONS					
Für Längen und Radien FOR LENGTHS AND RADII. ±	Abmaße in mm für Nennmaßbereich in mm ALL DIMENSIONS ARE IN MILLIMETRES				
	bis/UP TO	über/OVER		über/OVER	
	6	6 bis/UP TO 30		30	
	0.2	0.4			
d				i	
c				h	
b	30314	05.09.00	ble	g	
a	28314	15.09.99	ble	f	
				e	
Ausg. ISSUE	Änderung REVISION	gez. DRAWN BY		Ausg. ISSUE	Änderung REVISION

Pause COPY	Blatt SHEET		
	Original DIN	Maßstab SCALE	
	A3	5:1	
0	10	20	30 mm
gez./DRAWN BY 24.10.97 stz			
gepr./CHECKED BY			
Ersatz für/REPLACEMENT OF			

Zeichn./DRAWING NO.	S	3003.0452
Schaltmodul		
MARQUARDT		
Marquardt GmbH, D-78604 Rietheim-Weilheim		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Marquardt:](#)

[3003.0452](#)