



Push-On SMA Male to SMA Female Adapter

Push-on SMA male to SMA female adapter part number FMAD1047 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA adapter has a male to female gender configuration and is built of durable stainless steel. FMAD1047 SMA male to SMA female adapter operates to 18 GHz. The Fairview Microwave RF adapter provides good VSWR of 1.5:1 maximum. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.



Description	Min	Тур	Max	Units
Frequency Range	DC		18	GHz
VSWR		1.35:1	1.5:1	

Mechanical Specifications

Size

 Length
 0.72 in [18.29 mm]

 Width
 0.367 in [9.32 mm]

 Weight
 0.01 lbs [4.54 g]

Description	Connector 1	Connector 2
Туре	SMA Male	SMA Female
Connection Method	Push-On	
Polarity	Standard	Standard
Mating Cycles	500	500

Material Specifications

Description	Connector 1	Connector 2		
Туре	SMA Male	SMA Female		
Contact Material	Beryllium Copper	Beryllium Copper		
Contact Plating	Gold	Gold		
Insulation Material	PTFE	PTFE		
Outer Contact Material		Passivated Stainless Steel		
Body Material	Passivated Stainless Steel	Passivated Stainless Steel		
Coupling Nut Material	Passivated Stainless Steel	Passivated Stainless Steel		



Configuration:

- Push-On SMA Male Connector 1
- SMA Female Connector 2
- 50 Ohm
- Straight Body Geometry

Features:

- VSWR of 1.5:1 max up to 18 GHz
- Gold Plated Beryllium Copper Contact

Applications:

• General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Push-On SMA Male to SMA Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: Push-On SMA Male to SMA Female Adapter FMAD1047

URL: https://www.fairviewmicrowave.com/push-on-sma-male-sma-female-adapter-fmad1047-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





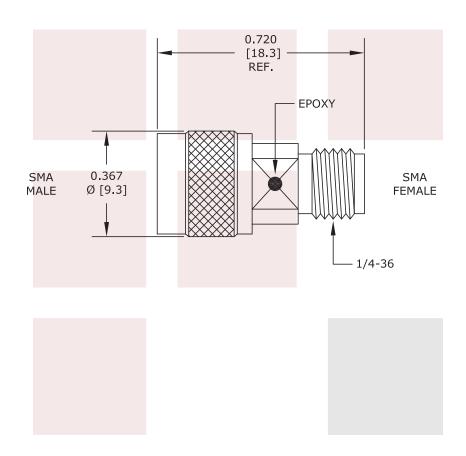

STANDARD TOLERANCES
.X ±0.2
.XX ±0.1

.XX ±0.1 .XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
Push-On SMA Male to SMA Female Adapter	DWG NO FMAD1047			CAGE CODE 3FKR5		
	CAD FILE 041117	SHEET	SCALE	≣ N/A	SIZE A	2233