

# BNC/M-BNC/MRA FLEXIBLE CABLE 1GHZ RG58

SCB15405-XX

## SPECIFICATIONS

**CABLE ASSEMBLY:**

VSWR:1.2:1 @< 1GHZ TYPICAL

**RAW CABLE: RG316DS**

TYPICAL LOSS (EXCLUDING CONNECTORS)

@1GHz: 0.15 DB/FT

@2GHz: 0.22 DB/FT

@3GHz: 0.28 DB/FT

OUTER SHIELD DIAMETER: .195"


**CONNECTORS:**

BNC: BRASS

CONTACTS Au PLATING

INTERFACE: MIL-STD-348A

OP TEMP: -55-110°C

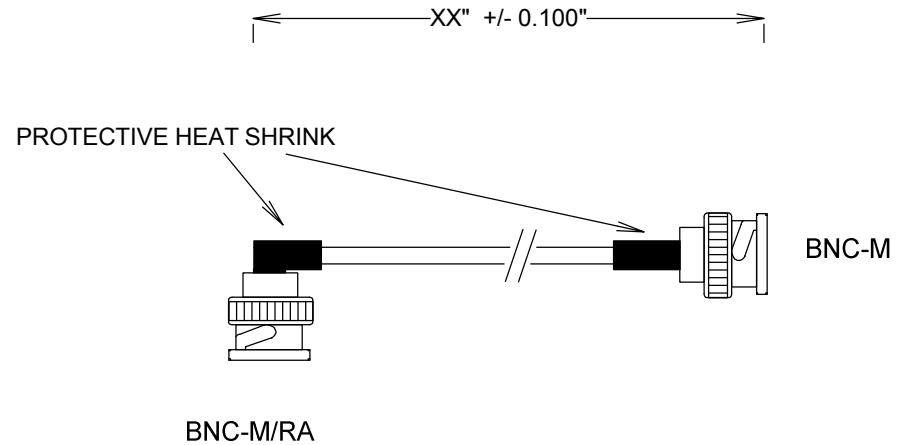

ALL DIMENSIONS IN inches(MM) Typical

<b>FAIRVIEW MICROWAVE INC.</b>			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
TITLE			
BNC/M-BNC/MRA FLEXIBLE CABLE 1GHZ RG58			
SIZE	CAGE CODE	DWG NO	REV
<b>A</b>	3FKR5	<b>SCB15405-XX</b>	--
SCALE		SHEET	