


REVISIONS				
REV. SYM.	E.C.O. NUMBER	DESCRIPTION	BY DATE	APP'D. DATE
1		ORIGINAL RELEASE	JMU 3/19/04	RRR 3/19/04

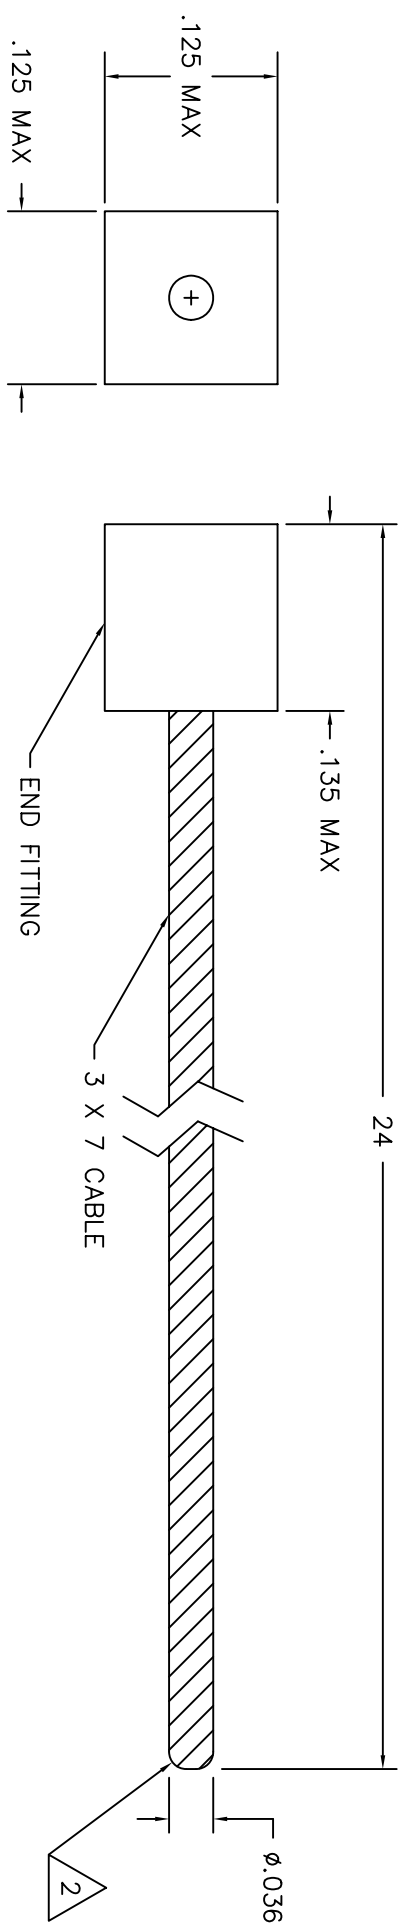

**UNCONTROLLED DOCUMENT  
WILL NOT BE UPDATED**

3. FERRULES SHALL BE PACKAGED IN A DISPOSABLE CARTRIDGE – 50 PIECES PER PACKAGE.
2. END SHALL BE FUSED BY FLASH WELD PROCESS WITH NO LOOSE STRANDS.
1. PART NUMBER REPRESENTS FIFTY (50) SAFETY CABLE KITS PACKAGED IN A SLEEVE.

NOTES:

MATERIAL	321 SS (UNS S32100)	ITEM	PART NO.	QTY.	DESCRIPTION/REMARKS
HEAT TREAT		DRN.	J. JOYCE	DATE	3/19/04
		CHK'D.	RRR	DATE	3/19/04
		APP'D.		DATE	
		APP'D.		DATE	
NOTE: THIS DRAWING IS AN OUTLINE DRAWING OF THE RESPECTIVE DIMC PART NUMBER INDICATED. ACTUAL DIMC PART NUMBER IS DRAWING NUMBER WITHOUT THE "-ENV" SUFFIX.					
WHERE USED:		SIZE	SCALE	CAD P/N	SHEET OF
SAFETY CABLE KIT, 24", .032 DIA. ENVELOPE DRAWING		B	NTS	C10-224PKG-ENV	1
DO NOT SCALE DRAWING		POSTING		DWG. NO. C10-224PKG-ENV	REV. 1