

Up Converter Frequency Mixer

LAVI-U252VH+

Level 21 (LO Power +21 dBm) 10 to 2500 MHz

Maximum Ratings

Operating Temperature	-45°C to 85°C
Storage Temperature	-55°C to 100°C
LO Power	+24 dBm
IF Power	+21 dBm
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	10
IF (IN)	2
RF (OUT)	14
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Features

- up converter mixer
- wide input frequency range
- very high IP3, 30 dBm typ.
- excellent L-R isolation, 45 dB typ;
L-I isolation, 51 dB typ.
- good 1 dB compression, 16 dBm typ.
- shielded metal cover
- aqueous washable
- protected by US Patent 6,807,407

Applications

- cellular base station
- mobile radio
- defense communications
- CATV
- VHF/UHF radios




Generic photo used for illustration purposes only
CASE STYLE: CK605

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

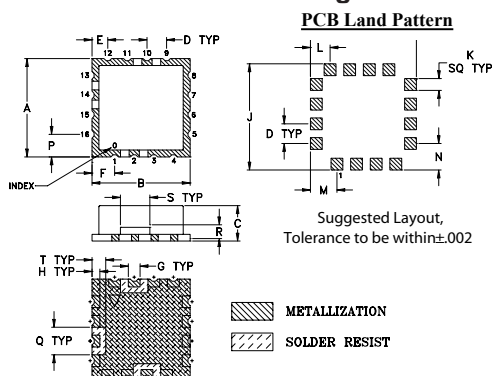


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060
12.7	12.7	4.572	2.54	2.032	2.921	1.524	1.016	13.72	1.524

L	M	N	P	Q	R	S	T	wt.
.100	.135	.135	.115	.140	.070	.150	.070	grams
2.54	3.429	3.429	2.921	3.556	1.778	3.81	1.778	1.0

Demo Board MCL P/N: TB-433+ Suggested PCB Layout (PL-012)

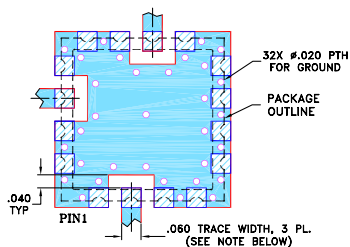

- NOTES: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Electrical Specifications (T_{AMB}=25°C)


FREQUENCY (MHz)			CONVERSION LOSS* (dB)			LO-IF (IN) ISOLATION (dB)		LO-RF (OUT) ISOLATION (dB)		IP3 at center band (dBm)
IF (IN)	LO	RF (OUT)	Typ.	σ**	Max.	Typ.	Min.	Typ.	Min.	Typ.
10-1300	1800-2800	1500-2500	7.8	0.15	9.5	51	33	45	27	30

1 dB COMPR. +16 dBm typ.
* Conversion Loss at 300 MHz IF
** σ is a standard deviation.

Typical Performance Data

IF (IN)	Frequency (MHz)		Conversion Loss (dB)		Isolation L-I (dB)		Isolation L-R (dB)		VSWR RF Port (:1)		VSWR LO Port (:1)		IP3 (dBm)	
	LO	RF (OUT)	LO +21dBm	LO +21dBm	LO +21dBm	LO +21dBm	LO +21dBm	LO +21dBm	LO +21dBm	LO +21dBm	LO +21dBm	LO +21dBm	LO +21dBm	
300.00	1800.00	1500.00	7.23	55.10	49.97	2.01	3.15	29.03						
300.00	1850.00	1550.00	7.05	53.96	48.85	1.95	3.51	30.35						
300.00	1900.00	1600.00	7.10	55.08	50.06	1.84	3.04	29.42						
300.00	1950.00	1650.00	7.05	54.08	49.09	1.72	3.95	30.71						
300.00	2050.00	1750.00	7.13	55.63	48.31	1.49	4.07	30.90						
300.00	2100.00	1800.00	7.14	57.37	47.58	1.38	3.72	29.99						
300.00	2150.00	1850.00	7.07	56.86	45.18	1.27	4.13	30.44						
300.00	2200.00	1900.00	7.06	57.94	44.09	1.19	4.12	29.92						
300.00	2300.00	2000.00	7.14	57.28	41.15	1.09	4.37	30.36						
300.00	2400.00	2100.00	7.33	55.34	38.74	1.21	4.92	31.47						
300.00	2450.00	2150.00	7.44	53.11	38.21	1.31	4.21	31.32						
300.00	2500.00	2200.00	7.62	49.33	36.92	1.40	5.85	31.99						
300.00	2600.00	2300.00	7.95	44.55	36.63	1.57	5.54	32.82						
300.00	2700.00	2400.00	8.14	42.26	38.18	1.62	4.41	33.63						
300.00	2750.00	2450.00	8.08	42.86	40.66	1.60	5.42	32.28						
300.00	2800.00	2500.00	7.96	41.67	40.72	1.52	3.70	32.62						

Electrical Schematic

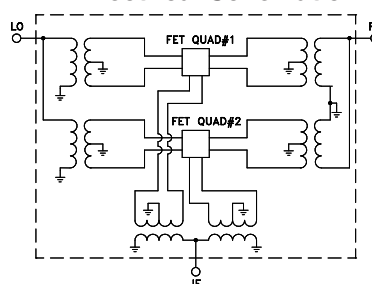








Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Performance Charts

LAVI-U252VH+

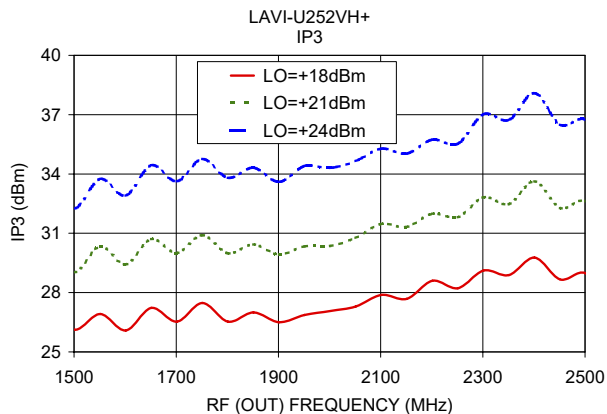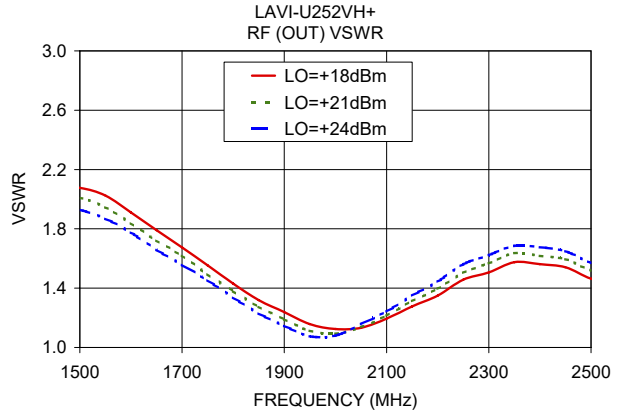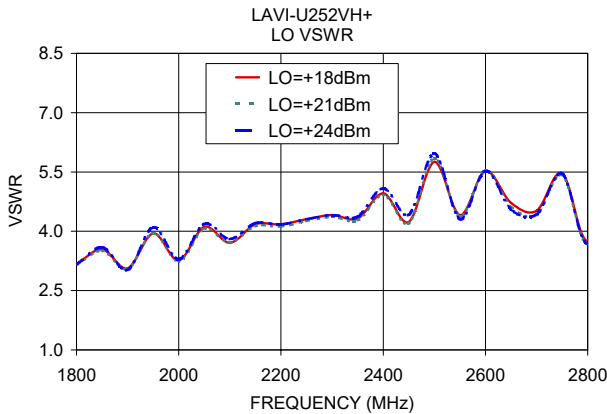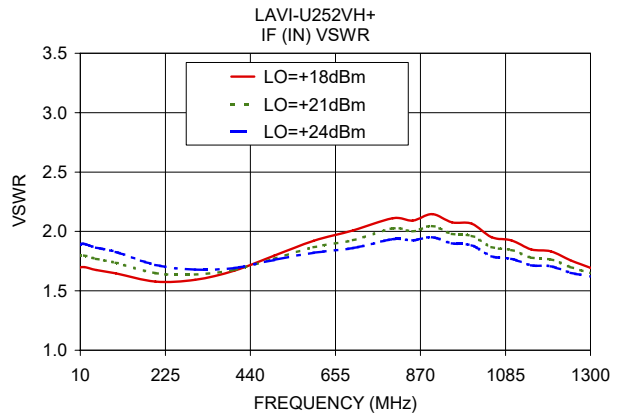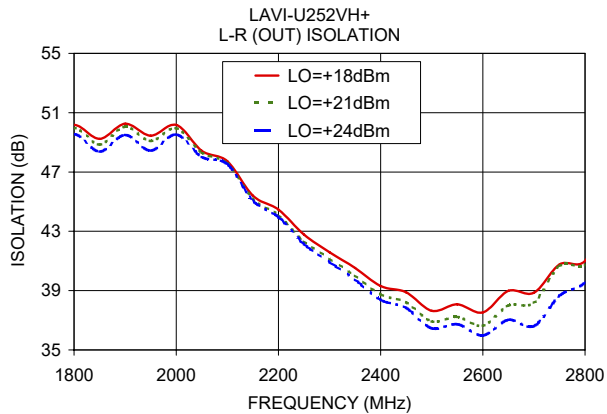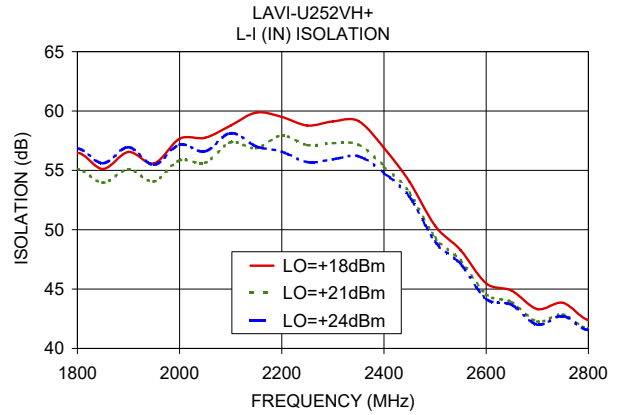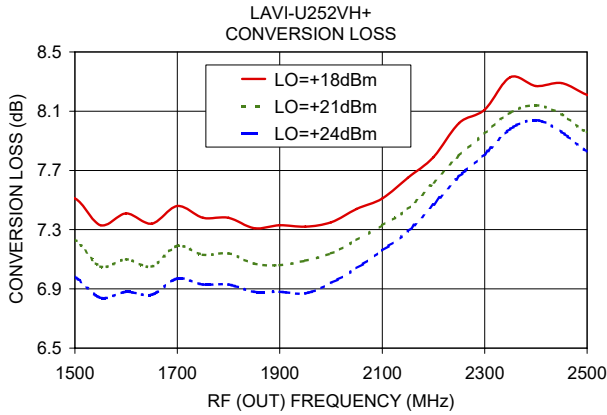

Notes
 A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp