

Surface Mount Frequency Mixer

LRMS-1MH+ LRMS-1MH

Level 13 (LO Power +13dBm) 2 to 500 MHz



CASE STYLE: QQQ130

Maximum Ratings

| | |
|---|----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| RF Power | 200mW |
| IF Current | 40mA |
| Permanent damage may occur if any of these limits are exceeded. | |

Pin Connections

| | |
|--------|-------|
| LO | 1 |
| RF | 4 |
| IF | 5 |
| GROUND | 2,3,6 |

Features

- low conversion loss, 6.11 dB typ.
- excellent L-R isolation, 44 dB typ.

Applications

- VHF/UHF
- instrumentation


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Available Tape and Reel at no extra cost

| Reel Size | Devices/Reel |
|-----------|----------------------|
| 7" | 10, 20, 50, 100, 200 |
| 13" | 500 |

Outline Drawing

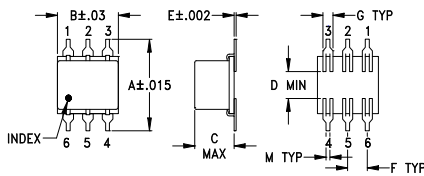


PCB Land Pattern



Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | |
|-------|------|------|------|------|------|-------|--|
| .400 | .31 | .200 | .10 | .010 | .100 | .050 | |
| 10.16 | 7.87 | 5.08 | 2.54 | 0.25 | 2.54 | 1.27 | |
| H | J | K | L | M | | wt | |
| .420 | .120 | .060 | .100 | .020 | | grams | |
| 10.67 | 3.05 | 1.52 | 2.54 | 0.51 | | 0.55 | |

Demo Board MCL P/N: TB-44+ Suggested PCB Layout (PL-083)

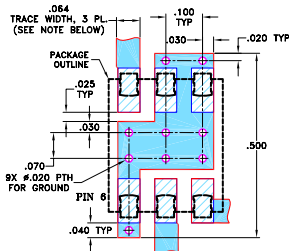

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Electrical Specifications

| FREQUENCY (MHz) | CONVERSION LOSS (dB) | LO-RF ISOLATION (dB) | | | LO-IF ISOLATION (dB) | | | IP3 at center band (dBm) | | | | | | | | | | |
|-----------------|----------------------|----------------------|-----|-----|----------------------|----|----|--------------------------|----|----|----|----|----|----|----|----|----|----|
| | | L | M | U | L | M | U | | | | | | | | | | | |
| 2-500 | DC-500 | 6.11 | .08 | 7.0 | 8.0 | 58 | 45 | 44 | 25 | 30 | 20 | 55 | 40 | 36 | 25 | 28 | 17 | 23 |

1 dB COMP.: +9 dBm typ.


L = low range [f_1 to $10 f_1$]
m = mid band [$2f_1$ to $f_1/2$]

M = mid range [$10 f_1$ to $f_1/2$]
U = upper range [$f_1/2$ to f_1]







Typical Performance Data

| Frequency (MHz) | | Conversion Loss (dB) | VSWR RF Port (:1) | Frequency (MHz) | Isolation L-R (dB) | Isolation L-I (dB) | VSWR LO Port (:1) |
|-----------------|--------|----------------------|-------------------|-----------------|--------------------|--------------------|-------------------|
| RF | LO | LO +13dBm | LO +13dBm | LO | LO +13dBm | LO +13dBm | LO +13dBm |
| 2.10 | 32.10 | 7.17 | 1.70 | 10.50 | 64.73 | 57.65 | 1.83 |
| 4.10 | 34.10 | 6.62 | 1.39 | 14.50 | 62.18 | 54.96 | 1.83 |
| 6.10 | 36.10 | 6.34 | 1.27 | 20.50 | 59.26 | 52.09 | 1.82 |
| 10.10 | 40.10 | 6.20 | 1.17 | 24.50 | 57.87 | 50.57 | 1.82 |
| 14.10 | 44.10 | 6.16 | 1.13 | 30.50 | 56.09 | 48.83 | 1.82 |
| 18.10 | 48.10 | 6.12 | 1.10 | 35.00 | 54.94 | 47.64 | 1.83 |
| 20.10 | 50.10 | 6.13 | 1.09 | 40.10 | 53.90 | 46.55 | 1.83 |
| 25.10 | 55.10 | 6.11 | 1.08 | 50.10 | 52.15 | 44.74 | 1.83 |
| 50.10 | 80.10 | 6.17 | 1.05 | 80.10 | 48.24 | 40.84 | 1.82 |
| 100.10 | 130.10 | 6.14 | 1.05 | 105.10 | 46.64 | 38.62 | 1.81 |
| 125.10 | 155.10 | 6.11 | 1.06 | 155.10 | 45.00 | 36.74 | 1.83 |
| 150.10 | 180.10 | 6.13 | 1.07 | 205.10 | 43.30 | 35.62 | 1.81 |
| 175.10 | 205.10 | 6.11 | 1.07 | 255.10 | 41.88 | 34.89 | 1.87 |
| 200.10 | 230.10 | 6.20 | 1.08 | 305.10 | 39.81 | 33.72 | 1.90 |
| 250.10 | 280.10 | 6.21 | 1.09 | 330.10 | 39.28 | 33.35 | 1.93 |
| 300.10 | 330.10 | 6.19 | 1.10 | 355.10 | 38.68 | 32.69 | 1.91 |
| 350.10 | 380.10 | 6.28 | 1.12 | 405.10 | 36.85 | 30.94 | 1.95 |
| 400.10 | 430.10 | 6.32 | 1.12 | 430.10 | 35.87 | 30.29 | 1.96 |
| 425.10 | 455.10 | 6.43 | 1.12 | 455.10 | 34.64 | 29.24 | 1.93 |
| 500.00 | 470.00 | 6.45 | 1.18 | 470.00 | 33.91 | 28.41 | 1.94 |

Electrical Schematic

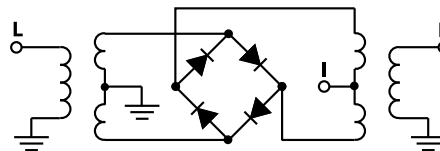

Performance Charts

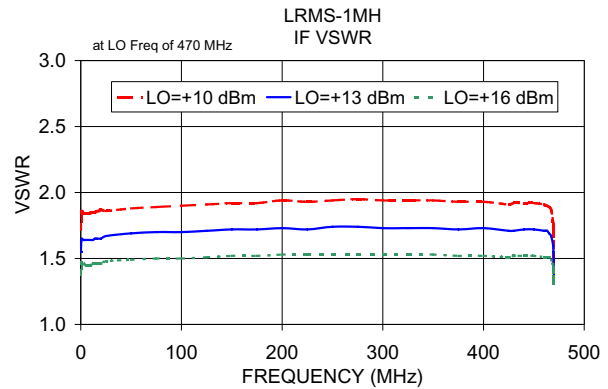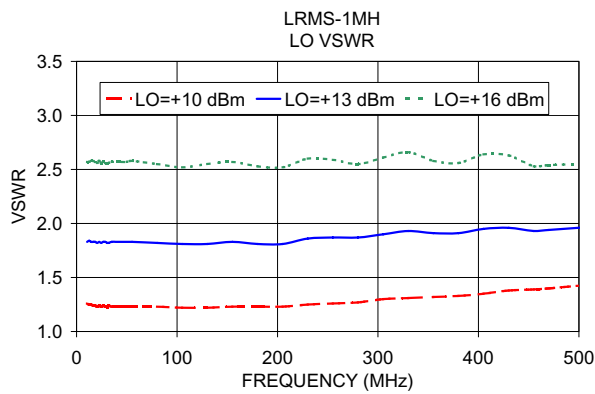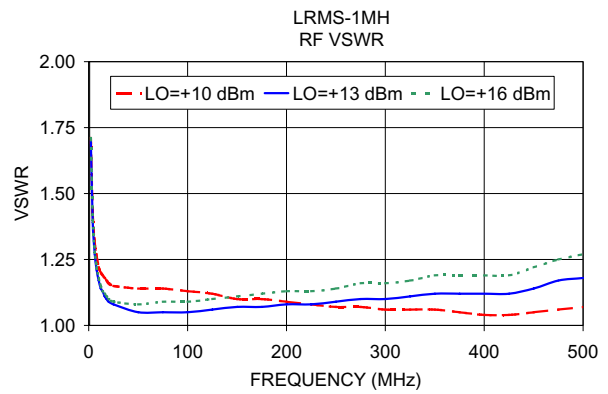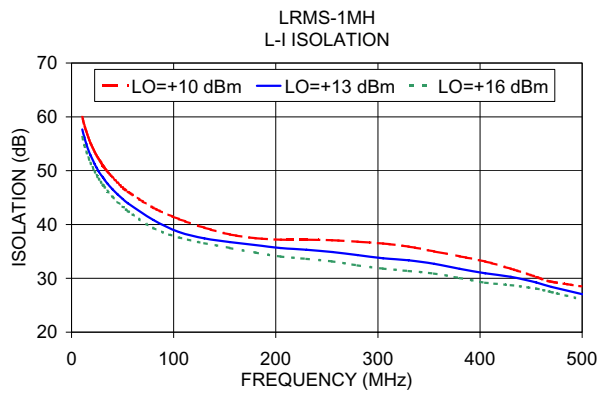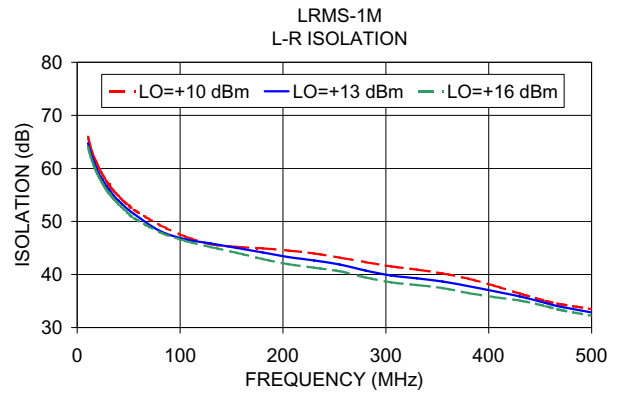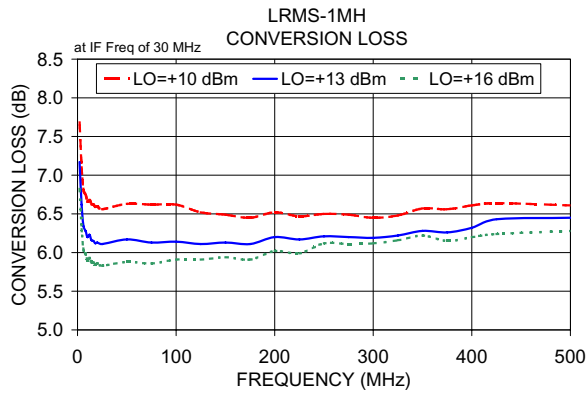

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp