

SKM 145GB123D



SEMITRANS® 2

IGBT Modules

SKM 145GB123D


SKM 145GAL123D

Features

- MOS input (voltage controlled)
- N channel, Homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to $6 \times I_{Cnom}$
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding
- Large clearance (10 mm) and creepage distances (20 mm)

Typical Applications*

- Switching (not for linear use)
- AC inverter drives

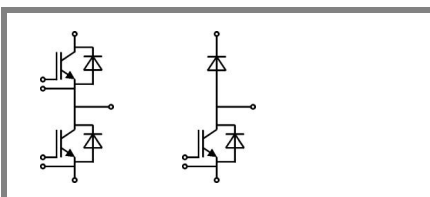

GB

GAL

Absolute Maximum Ratings		$T_c = 25\text{ }^\circ\text{C}$, unless otherwise specified			
Symbol	Conditions	Values		Units	
IGBT					
V_{CES}	$T_j = 25\text{ }^\circ\text{C}$	1200		V	
I_C	$T_j = 150\text{ }^\circ\text{C}$	$T_{case} = 25\text{ }^\circ\text{C}$	145	A	
		$T_{case} = 80\text{ }^\circ\text{C}$	110	A	
I_{CRM}	$I_{CRM} = 2 \times I_{Cnom}$	200		A	
V_{GES}		± 20		V	
t_{psc}	$V_{CC} = 600\text{ V}; V_{GE} \leq 20\text{ V}; T_j = 125\text{ }^\circ\text{C}$ $V_{CES} < 1200\text{ V}$	10		μs	
Inverse Diode					
I_F	$T_j = 150\text{ }^\circ\text{C}$	$T_{case} = 25\text{ }^\circ\text{C}$	130	A	
		$T_{case} = 80\text{ }^\circ\text{C}$	90	A	
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$	200		A	
I_{FSM}	$t_p = 10\text{ ms}; \sin.$	$T_j = 150\text{ }^\circ\text{C}$	900		A
Freewheeling Diode					
I_F	$T_j = 150\text{ }^\circ\text{C}$	$T_{case} = 25\text{ }^\circ\text{C}$	170	A	
		$T_{case} = 80\text{ }^\circ\text{C}$	115	A	
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$	300		A	
I_{FSM}	$t_p = 10\text{ ms}; \sin.$	$T_j = 150\text{ }^\circ\text{C}$	1440		A
Module					
$I_{t(RMS)}$		200		A	
T_{vj}		- 40 ... + 150		$^\circ\text{C}$	
T_{stg}		- 40 ... + 125		$^\circ\text{C}$	
V_{isol}	AC, 1 min.	2500		V	

Characteristics		$T_c = 25\text{ }^\circ\text{C}$, unless otherwise specified				
Symbol	Conditions	min.	typ.	max.	Units	
IGBT						
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 4\text{ mA}$	4,5	5,5	6,5	V	
I_{CES}	$V_{GE} = 0\text{ V}, V_{CE} = V_{CES}$	$T_j = 25\text{ }^\circ\text{C}$		0,1	0,3	mA
V_{CE0}		$T_j = 25\text{ }^\circ\text{C}$		1,4	1,6	V
		$T_j = 125\text{ }^\circ\text{C}$		1,6	1,8	V
r_{CE}	$V_{GE} = 15\text{ V}$	$T_j = 25\text{ }^\circ\text{C}$		11	14	$\text{m}\Omega$
		$T_j = 125\text{ }^\circ\text{C}$		15	19	$\text{m}\Omega$
$V_{CE(sat)}$	$I_{Cnom} = 100\text{ A}, V_{GE} = 15\text{ V}$	$T_j = \text{ }^\circ\text{C}_{chiplev.}$		2,5	3	V
C_{ies}	$V_{CE} = 25, V_{GE} = 0\text{ V}$	$f = 1\text{ MHz}$		6,5	8,5	nF
C_{oes}				1	1,5	nF
C_{res}				0,5	0,6	nF
Q_G	$V_{GE} = -8\text{ V} - +20\text{ V}$			1000	nC	
R_{Gint}	$T_j = \text{ }^\circ\text{C}$			5	Ω	
$t_{d(on)}$	$R_{Gon} = 6,8\ \Omega$	$V_{CC} = 600\text{ V}$ $I_C = 100\text{ A}$	160	320	ns	
t_r			80	160	ns	
E_{on}	$R_{Goff} = 6,8\ \Omega$	$T_j = 125\text{ }^\circ\text{C}$ $V_{GE} = -15\text{ V}$	16		mJ	
$t_{d(off)}$			400	520	ns	
t_f			70	100	ns	
E_{off}			12		mJ	
$R_{th(j-c)}$	per IGBT			0,15	K/W	

SKM 145GB123D



SEMITRANS® 2

IGBT Modules

SKM 145GB123D


SKM 145GAL123D

Features

- MOS input (voltage controlled)
- N channel, Homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to $6 \times I_{cnom}$
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding
- Large clearance (10 mm) and creepage distances (20 mm)

Typical Applications*

- Switching (not for linear use)
- AC inverter drives

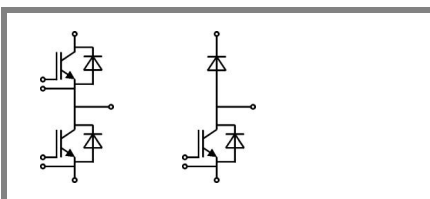

GB

GAL

Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
Inverse Diode					
$V_F = V_{EC}$	$I_{Fnom} = 100 \text{ A}; V_{GE} = 0 \text{ V}$	$T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$	2	2,5	V
		$T_j = 125 \text{ }^\circ\text{C}_{chiplev.}$	1,8		V
V_{F0}		$T_j = 25 \text{ }^\circ\text{C}$	1,1	1,4	V
		$T_j = 125 \text{ }^\circ\text{C}$			V
r_F		$T_j = 25 \text{ }^\circ\text{C}$	9	11	mΩ
		$T_j = 125 \text{ }^\circ\text{C}$			mΩ
I_{RRM}	$I_F = 100 \text{ A}$	$T_j = 25 \text{ }^\circ\text{C}$	35		A
Q_{rr}	$di/dt = 1000 \text{ A}/\mu\text{s}$		5		μC
E_{rr}	$V_{GE} = 0 \text{ V}; V_{CC} = 600 \text{ V}$				mJ
$R_{th(j-c)D}$	per diode			0,36	K/W
Freewheeling Diode					
$V_F = V_{EC}$	$I_{Fnom} = 150 \text{ A}; V_{GE} = 0 \text{ V}$	$T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$	2	2,5	V
		$T_j = 125 \text{ }^\circ\text{C}_{chiplev.}$	1,8		V
V_{F0}		$T_j = 25 \text{ }^\circ\text{C}$	1,1	1,4	V
		$T_j = 125 \text{ }^\circ\text{C}$			V
r_F		$T_j = 25 \text{ }^\circ\text{C}$	9	11	V
		$T_j = 125 \text{ }^\circ\text{C}$			V
I_{RRM}	$I_F = 150 \text{ A}$	$T_j = 25 \text{ }^\circ\text{C}$	55		A
Q_{rr}			8		μC
E_{rr}	$V_{GE} = 0 \text{ V}; V_{CC} = 600 \text{ V}$				mJ
$R_{th(j-c)FD}$	per diode			0,3	K/W
Module					
L_{CE}				30	nH
$R_{CC'+EE'}$	res., terminal-chip	$T_{case} = 25 \text{ }^\circ\text{C}$	0,75		mΩ
		$T_{case} = 125 \text{ }^\circ\text{C}$	1		mΩ
$R_{th(c-s)}$	per module			0,05	K/W
M_s	to heat sink M6		3	5	Nm
M_t	to terminals M5		2,5	5	Nm
w				160	g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

SKM 145GB123D



SEMITRANS[®] 2

IGBT Modules

SKM 145GB123D

SKM 145GAL123D


Features

- MOS input (voltage controlled)
- N channel, Homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to $6 \times I_{cnom}$
- Latch-up free
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding
- Large clearance (10 mm) and creepage distances (20 mm)

Typical Applications*







- Switching (not for linear use)
- AC inverter drives







Z_{th}				
Symbol	Conditions	Values		Units
$Z_{th(j-c)I}$				
$R_{\theta j-c}$	$i = 1$	100		mk/W
$R_{\theta j-c}$	$i = 2$	38		mk/W
$R_{\theta j-c}$	$i = 3$	10		mk/W
$R_{\theta j-c}$	$i = 4$	2		mk/W
$\tau_{th j-c}$	$i = 1$	0,03		s
$\tau_{th j-c}$	$i = 2$	0,0287		s
$\tau_{th j-c}$	$i = 3$	0,0012		s
$\tau_{th j-c}$	$i = 4$	0,0002		s
$Z_{th(j-c)D}$				
$R_{\theta j-c}$	$i = 1$	240		mk/W
$R_{\theta j-c}$	$i = 2$	95		mk/W
$R_{\theta j-c}$	$i = 3$	22		mk/W
$R_{\theta j-c}$	$i = 4$	3		mk/W
$\tau_{th j-c}$	$i = 1$	0,054		s
$\tau_{th j-c}$	$i = 2$	0,0113		s
$\tau_{th j-c}$	$i = 3$	0,0012		s
$\tau_{th j-c}$	$i = 4$	0,005		s

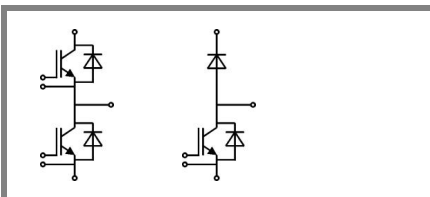

GB

GAL

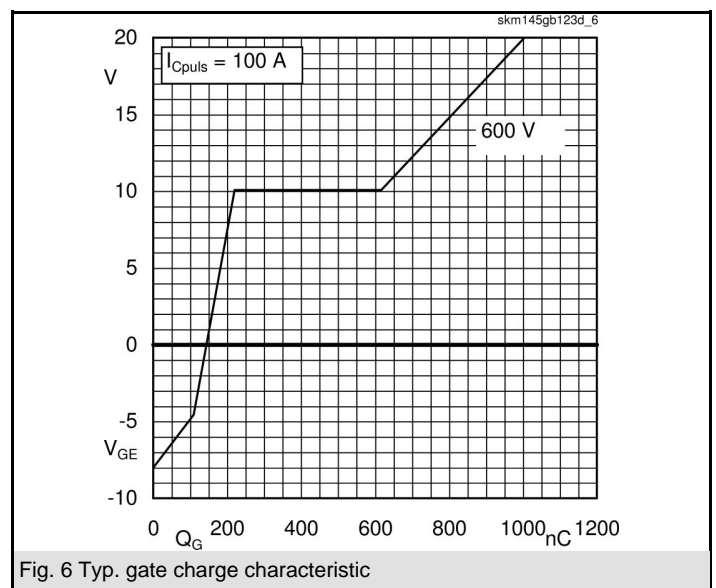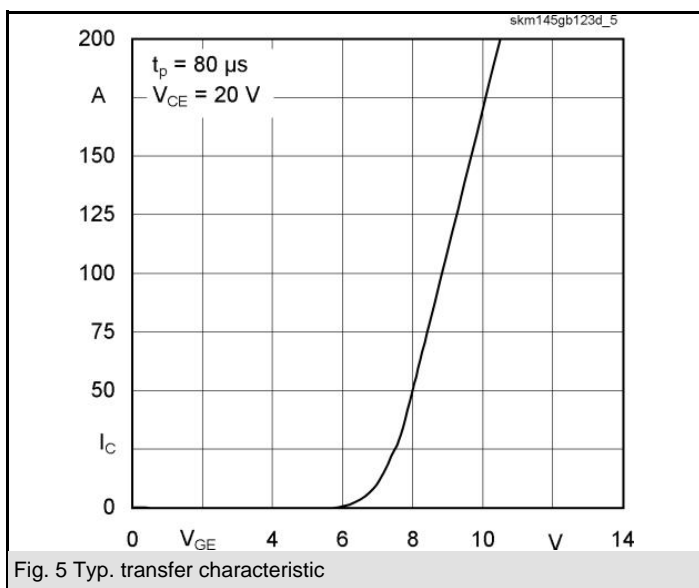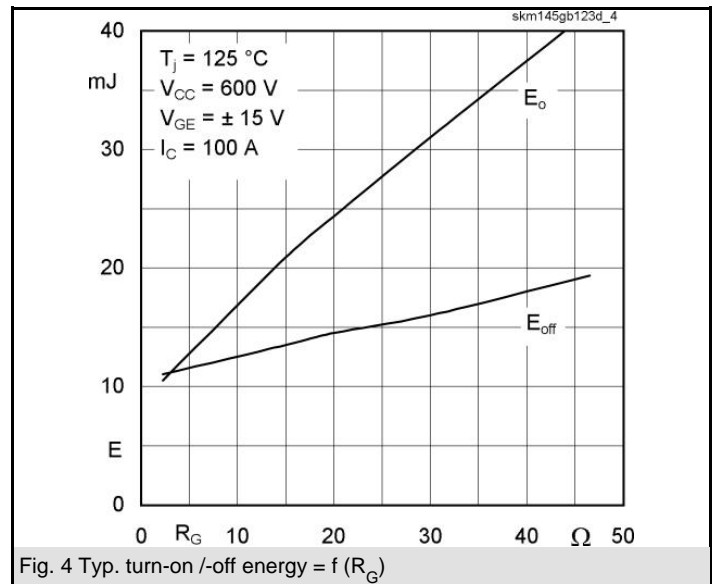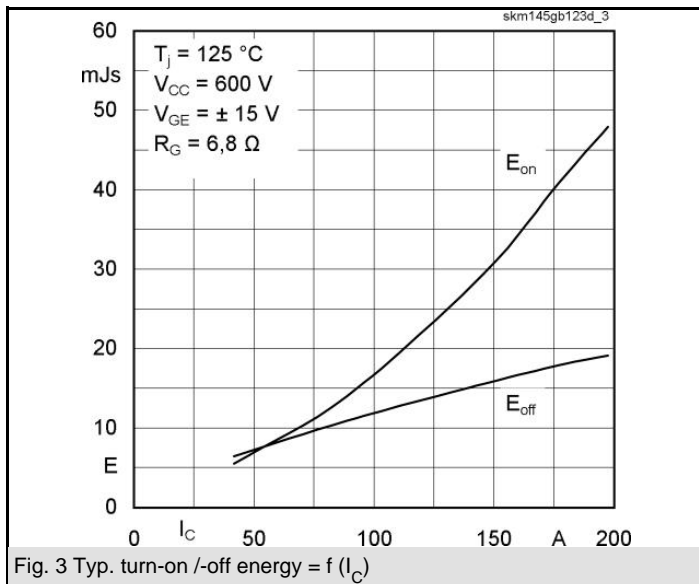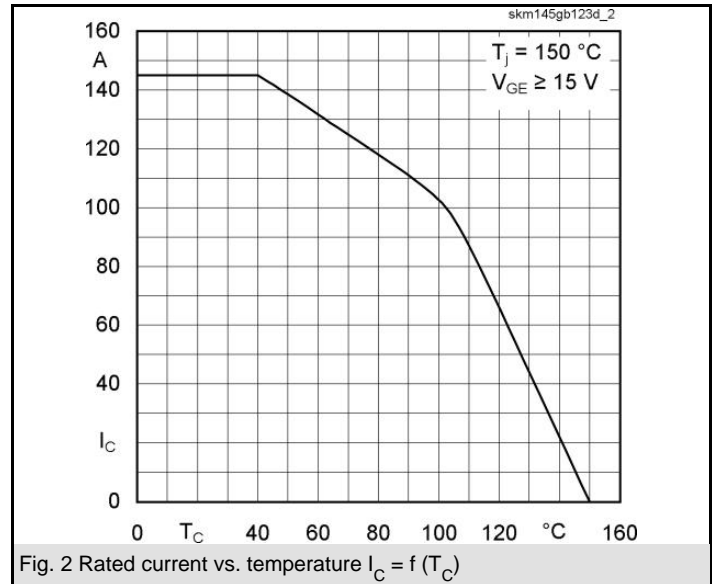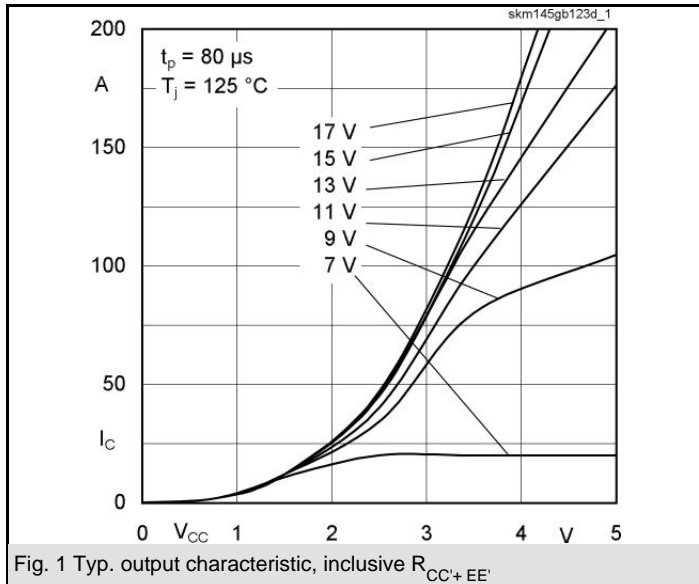

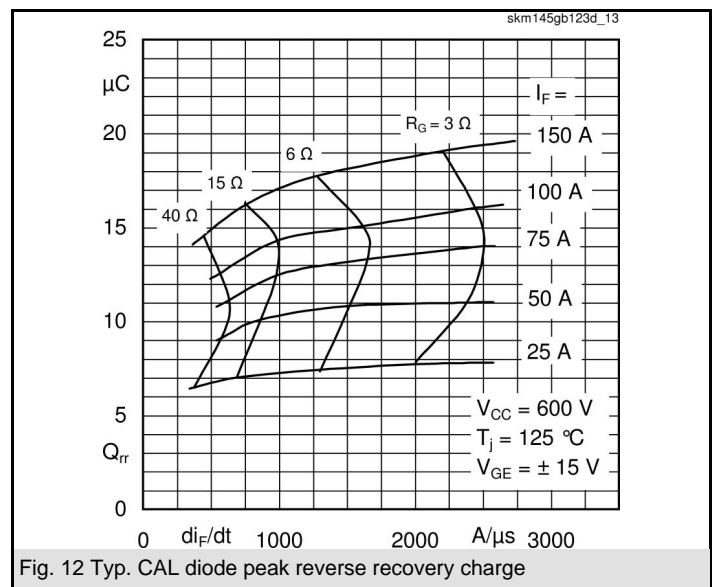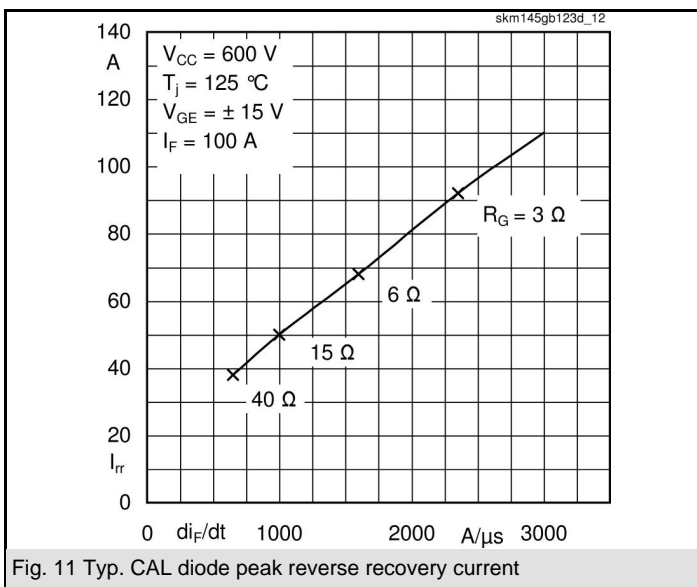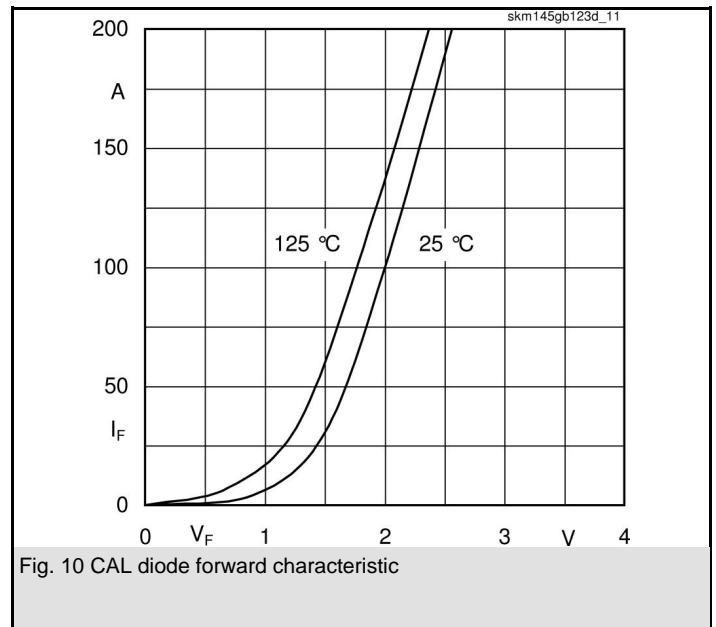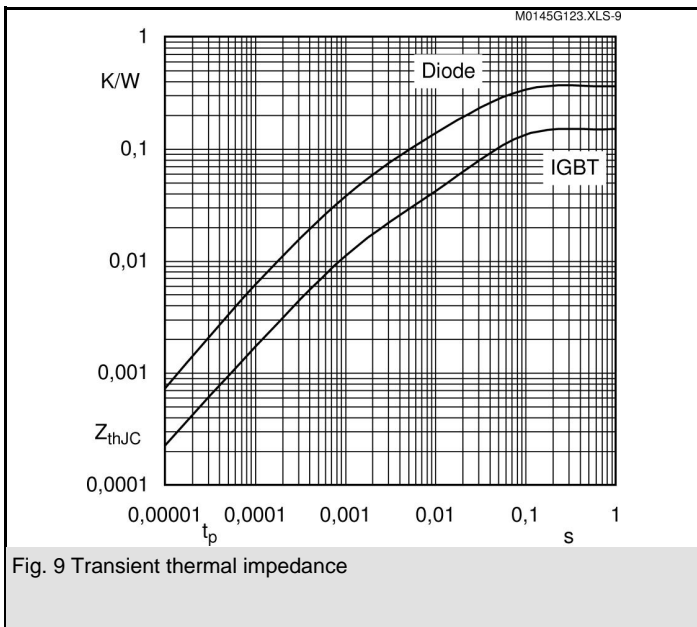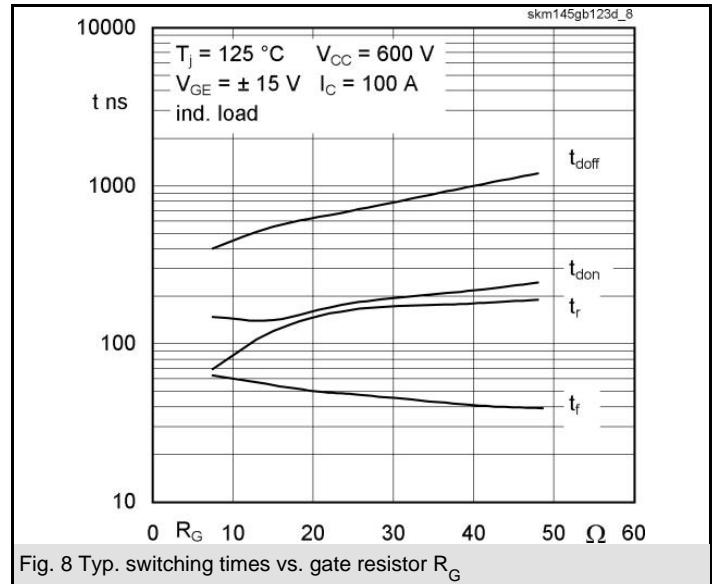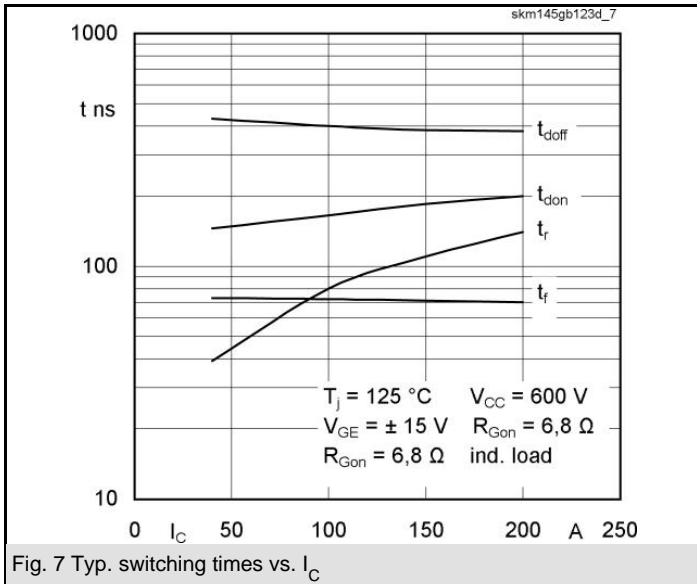


SKM 145GB123D


UL Recognized

CASED61


File no. E 63 532

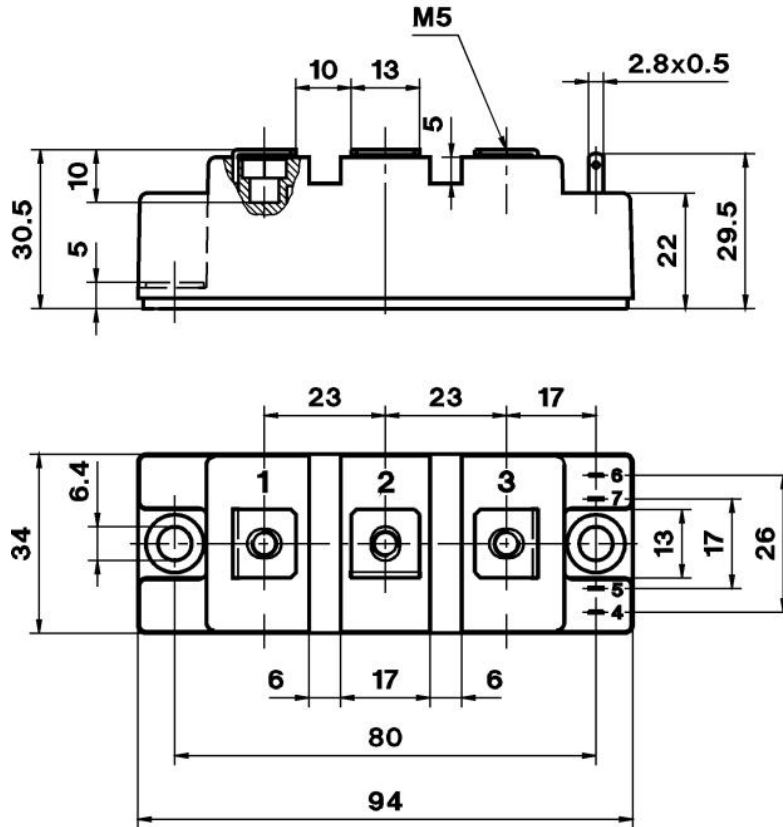

Case D 61

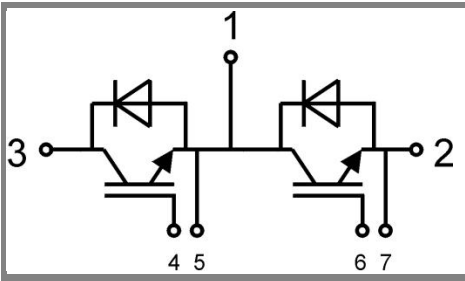

GB Case D 61

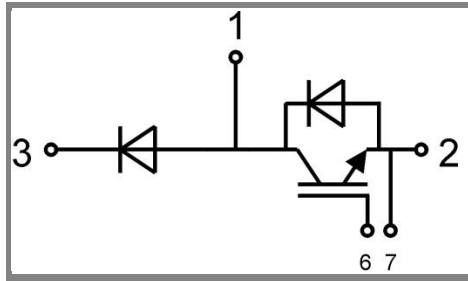

GAL Case D 62 (→ D 61)