

Bi-Directional Coupler

SYDC-20-31HP+

50Ω 20 dB Coupling 1.5 to 30 MHz 50 Watt



Generic photo used for illustration purposes only

CASE STYLE: AH1596

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature -40°C to 65°C Case*
 Storage Temperature -55°C to 100°C
 * Case temperature is defined as temperature on ground leads.
 Permanent damage may occur if any of these limits are exceeded.

Pad Connections

| | |
|-------------------|---------|
| INPUT | 8 |
| OUTPUT | 1 |
| COUPLED (FORWARD) | 5 |
| COUPLED (REVERSE) | 4 |
| GROUND | 2,3,6,7 |


Outline Drawing

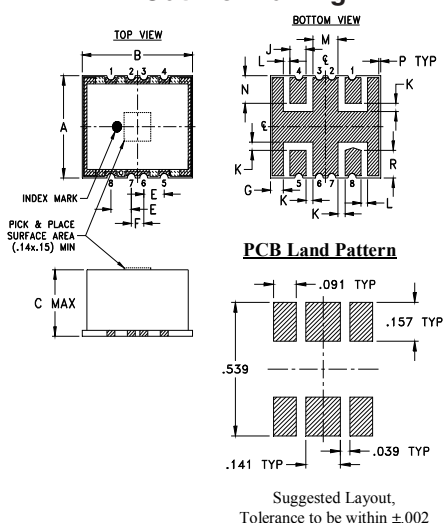

Outline Dimensions (inch/mm)

| | | | | | | | |
|-------|-------|------|------|------|------|------|-------|
| A | B | C | E | F | G | H | J |
| .50 | .62 | .36 | .115 | .070 | .073 | -- | .090 |
| 12.70 | 15.75 | 9.14 | 2.92 | 1.78 | 1.85 | -- | 2.29 |
| K | L | M | N | P | Q | R | wt |
| .040 | .037 | .140 | .135 | .010 | -- | .135 | grams |
| 1.02 | 0.94 | 3.56 | 3.43 | 0.25 | -- | 3.43 | 3.00 |

Demo Board MCL P/N: TB-608+ Suggested PCB Layout (PL-339)

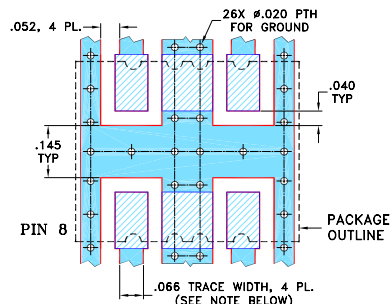

NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- high power, 50W max. with output load VSWR 2.0 max
- high power, 20W max. with output open or short
- low mainline loss, 0.1 dB typ.
- high directivity, 33 dB typ.
- excellent flatness, 0.1 dB typ.

Applications


- military mobile
- signal monitoring

Electrical Specifications at 25°C

| Parameter | Condition (MHz) | Min. | Typ. | Max. | Unit |
|--|-----------------|------|------|------|------|
| Frequency Range | | 1.5 | — | 30 | MHz |
| Mainline Loss (above theoretical 0.044 dB) | 1.5-30 | — | 0.06 | 0.25 | dB |
| Coupling | 1.5-30 | 19.5 | 20.5 | 21.5 | dB |
| Coupling Flatness(±) | 1.5-30 | — | 0.05 | 0.2 | dB |
| Directivity | 1.5-30 | 22 | 33 | — | dB |
| Return Loss (Input) | 1.5-30 | 20 | 25 | — | dB |
| Return Loss (Output) | 1.5-30 | 20 | 25 | — | dB |
| Return Loss (Coupling) | 1.5-30 | 18 | 24 | — | dB |
| Input Power ¹ | 1.5-30 | — | — | 50 | W |

1. The user must provide adequate means of heat removal to limit the temperature of ground connections 2,3,6,7, to 65°C, in order to ensure proper performance. At 25°C ambient temperature this requires thermal resistance of the user's PC board heat sink to be 10°C/W.




Electrical Schematic

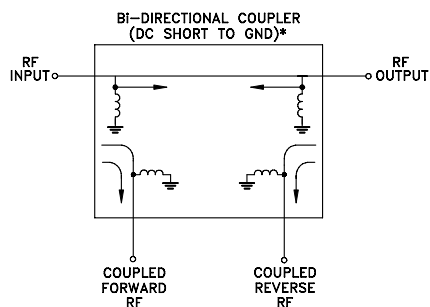

* ELECTRICAL SCHEMATIC IS FOR BI-DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Typical Performance Data

| Frequency (MHz) | Mainline Loss (dB) | | Coupling (dB) | | Directivity (dB) | | Return Loss (dB) | | | |
|-----------------|--------------------|------------|---------------|-------------|------------------|------------|------------------|-------|---------|---------|
| | In-Out | In-Cpl Fwd | In-Cpl Fwd | Out-Cpl Rev | Out-Cpl Fwd | In-Cpl Rev | In | Out | Cpl Fwd | Cpl Rev |
| 1.50 | 0.07 | 20.49 | 20.49 | 20.45 | 51.77 | 45.19 | 40.50 | 42.13 | 41.68 | 42.07 |
| 3.00 | 0.07 | 20.50 | 20.50 | 20.46 | 50.18 | 45.85 | 39.51 | 40.84 | 40.64 | 41.51 |
| 5.00 | 0.07 | 20.51 | 20.51 | 20.47 | 47.78 | 44.28 | 38.07 | 38.87 | 39.00 | 38.71 |
| 8.00 | 0.07 | 20.51 | 20.51 | 20.47 | 45.16 | 42.62 | 36.18 | 36.50 | 36.83 | 36.19 |
| 10.00 | 0.07 | 20.52 | 20.52 | 20.48 | 43.40 | 41.50 | 35.11 | 35.11 | 35.40 | 34.81 |
| 13.00 | 0.07 | 20.52 | 20.52 | 20.48 | 41.29 | 39.87 | 33.42 | 33.40 | 33.51 | 33.09 |
| 15.00 | 0.07 | 20.53 | 20.53 | 20.49 | 40.17 | 39.01 | 32.39 | 32.36 | 32.41 | 32.07 |
| 20.00 | 0.08 | 20.54 | 20.54 | 20.50 | 37.62 | 36.63 | 30.07 | 29.90 | 29.91 | 29.65 |
| 25.00 | 0.09 | 20.55 | 20.55 | 20.52 | 35.50 | 34.74 | 28.31 | 28.12 | 27.98 | 27.80 |
| 30.00 | 0.09 | 20.57 | 20.57 | 20.54 | 33.64 | 33.09 | 26.88 | 26.72 | 26.52 | 26.31 |

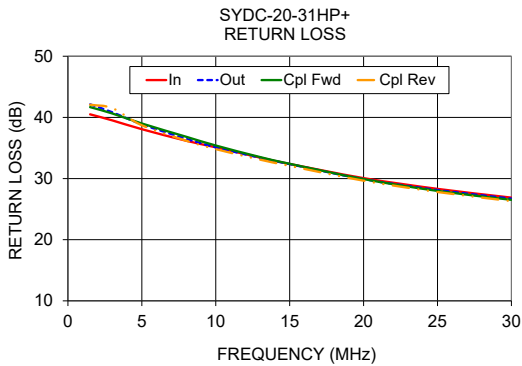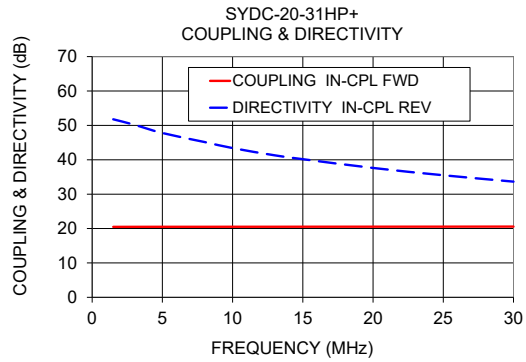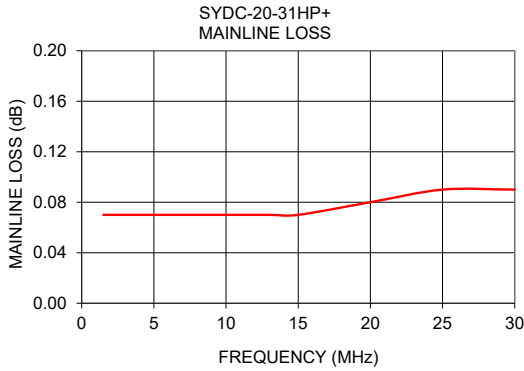

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

