

Push-Pull

Wideband Amplifier

ZHL-122LM-S+

50Ω

40 to 1200 MHz

The Big Deal

- Ultra low second harmonic, very high output IP2, 76 dBm typ.
- Excellent output IP3, 42 dBm typ.
- Output power at 1 dB compression, 23 dBm typ.



Case Style: S860

Product Overview

The ZHL-122LM-S+ is a high-performance, push-pull amplifier featuring very low second- and third-order distortion products across its 40-1200 MHz bandwidth. Designed for a 6V/260 mA typ. power supply, with SMA connectors in/out, it's a high-value, low-cost solution providing a 12-dB gain for instrumentation, cellular, ISM, and UHF applications. The rugged, aluminum alloy case measures 3.75 x 2.0 x 0.80" high.

Key Features

Feature	Advantages
Ultra low second harmonic, -75 dBc typ. at 5 dBm output	Exceptionally low second order harmonic distortion
Very high output IP2, 76 dBm typ	Very high linearity across entire 40-1200 MHz bandwidth
Excellent output IP3, 42 dBm typ	Excellent suppression of unwanted intermods in the presence of multi carriers
Output power 23 dBm typ	Appropriate signal strength for the coaxial portions of hybrid and FTTH systems, as well as many TETRA and LTE applications
Flat gain, 12.6 ± 1.5 dB	Ideal for applications requiring consistent, repeatable amplification across a wide range of frequencies

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Push-Pull Wideband Amplifier

ZHL-122LM-S+

50Ω 40 to 1200 MHz

Features

- Ultra low second harmonic, -75 dBc typ. at 5 dBm output
- Very high output IP2, 76 dBm typ.
- Excellent output IP3, 42 dBm typ.
- Output power, 23 dBm.

Applications

- Instrumentation
- Base stations
- Cellular
- FTTH



Case Style: S860

Connectors	Model
SMA	ZHL-122LM-S+

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min	Typ.	Max.	Units
Frequency Range		40		1200	MHz
Gain	40	12.7	14.2	—	dB
	700	10.8	12.3	—	
	1000	10.4	11.9	—	
	1200	9.5	11.0	—	
Output Power at 1dB compression	40	22.5	24	—	dBm
	700	21.5	23	—	
	1000	21.0	23	—	
	1200	19.5	21.5	—	
Output third order intercept point IP3*	40	—	42	—	dBm
	700	—	40	—	
	1000	—	40	—	
	1200	—	37	—	
Output second order intercept point IP2*	40	—	81	—	dBm
	700	—	70	—	
	1000	—	66	—	
	1200	—	61	—	
Noise Figure	40-1200	—	3.9	5.0	dB
Input VSWR	40-1200	—	1.5	—	:1
Output VSWR	40-1200	—	1.5	—	:1
DC Supply Voltage	40-1200	—	6.0	6.5	V
Supply Current	40-1200	200	260	360	mA

*Two tones, spaced 1 MHz apart, 5 dBm/tone at output.

Maximum Ratings

Parameter	Ratings
Operating Temperature	-40°C to 65°C Case
Case Temperature	+65°C
Storage Temperature	-55°C to 100°C
DC Voltage	7V
Input RF Power (no damage)	24dBm

Permanent damage may occur if any of these limits are exceeded.

Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
M171494
ZHL-122LM-S+
ED-11699C/4
WZ/CP/AM
190228
Page 2 of 4

Outline Drawing

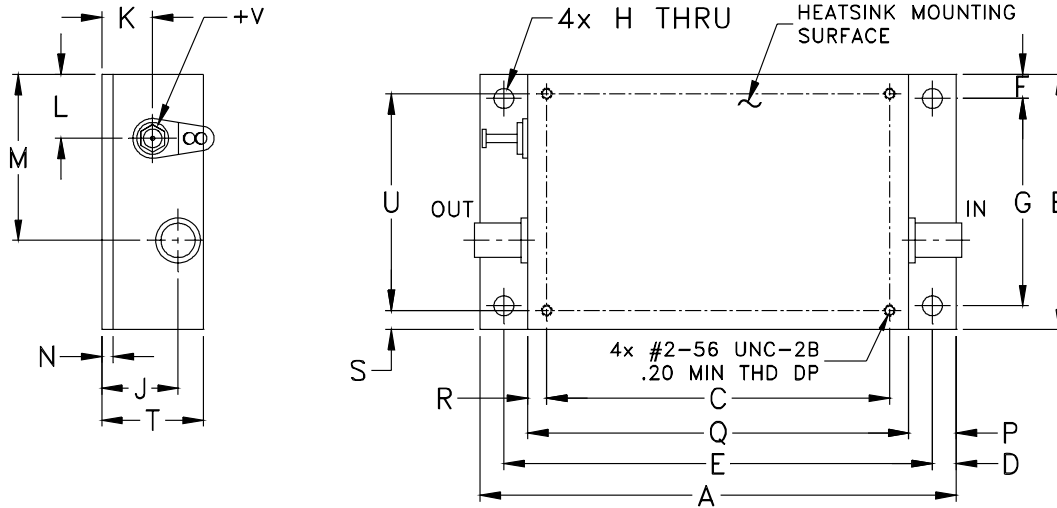

Outline Dimensions (inch/mm)









A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	wt
3.75	2.00	2.700	.19	3.375	.19	1.625	.144	.50	.40	.50	1.30	.10	.38	3.00	.15	.15	.80	1.700	grams
95.25	50.80	68.58	4.83	85.73	4.83	41.28	3.66	12.70	10.16	12.70	33.02	2.54	9.65	76.20	3.81	3.81	20.32	43.18	150.0

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR (:1)		NOISE FIGURE (dB)	POUT at 1dB COMPR. (dBm)	OUTPUT IP3 (dBm)
	6V	6V	IN	OUT	6V	6V	6V
40.00	14.13	7.24	1.22	1.45	3.11	24.59	44.54
100.00	13.20	7.00	1.35	1.44	3.14	24.77	44.70
200.00	12.77	7.77	1.44	1.46	3.13	25.01	46.15
300.00	12.82	8.15	1.54	1.37	3.10	25.06	46.70
400.00	12.84	8.03	1.56	1.25	3.13	25.15	47.26
500.00	12.74	7.91	1.48	1.08	3.22	24.83	44.71
600.00	12.54	7.88	1.37	1.11	3.26	24.57	42.76
700.00	12.27	8.13	1.26	1.31	3.36	24.05	40.81
800.00	12.06	8.62	1.20	1.46	3.43	23.52	39.82
900.00	11.96	9.16	1.20	1.50	3.51	22.86	39.91
1000.00	11.85	9.61	1.29	1.40	3.68	22.83	39.88
1100.00	11.63	10.01	1.43	1.27	3.75	22.61	37.42
1200.00	11.13	10.35	1.58	1.33	3.95	22.36	38.70

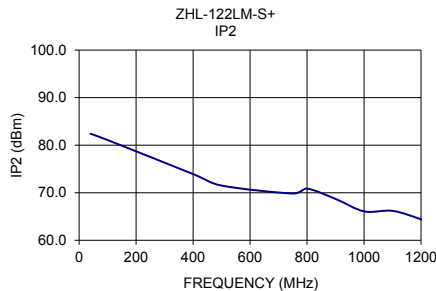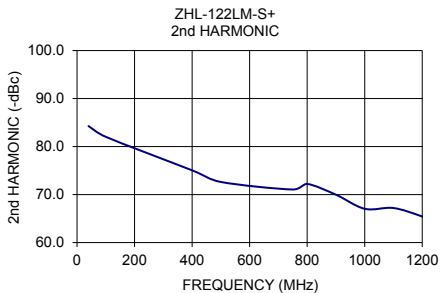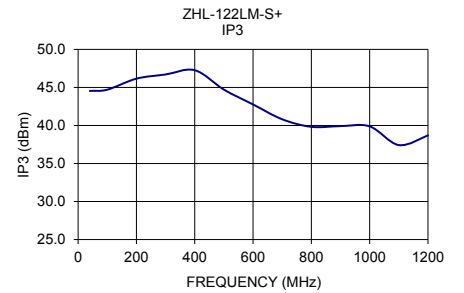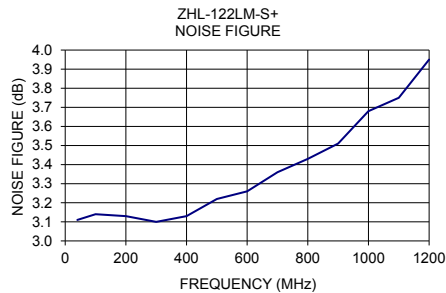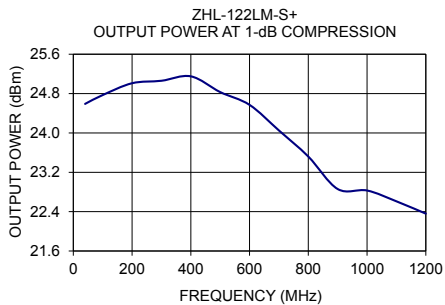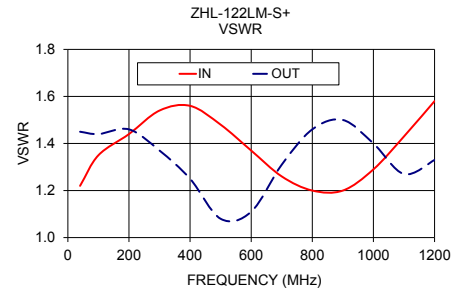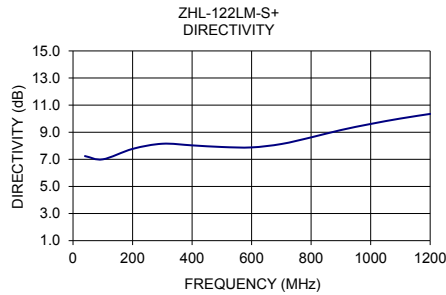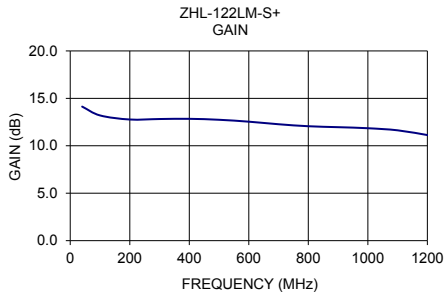

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

