

Midi Horns and Sirens / Electronic Siren 123
Electr. Siren WM alternating 12VDC BK



Part No.: 123.100.54




MECHANICAL DATA	
Length	67 mm
Width	54 mm
Height	67 mm
Diameter	54 mm
Materials	ABS
Housing colour	Black
Protection category	IP54
Connection	Cable
cross-sectional area maximum	0,50mm ² / 20AWG
Type of fixing	Wall mounting
Service life optical	1,000 h minimum
Acoustic service life	1,000 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+70°C
Weight with packaging	97 g
Product weight	81 g
ELECTRICAL DATA	
Operating voltage	12V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	12 VDC
Rated operational current	100 mA
Rated inrush current	3.000 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV
ACUSTICAL DATA	
Volume/dB(max) at 1m distance	105,0 dB (A)
Acoustic signal image	Alternating tone

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi Horns and Sirens / Electronic Siren 123

Electr. Siren WM alternating 12VDC BK

DRAWING

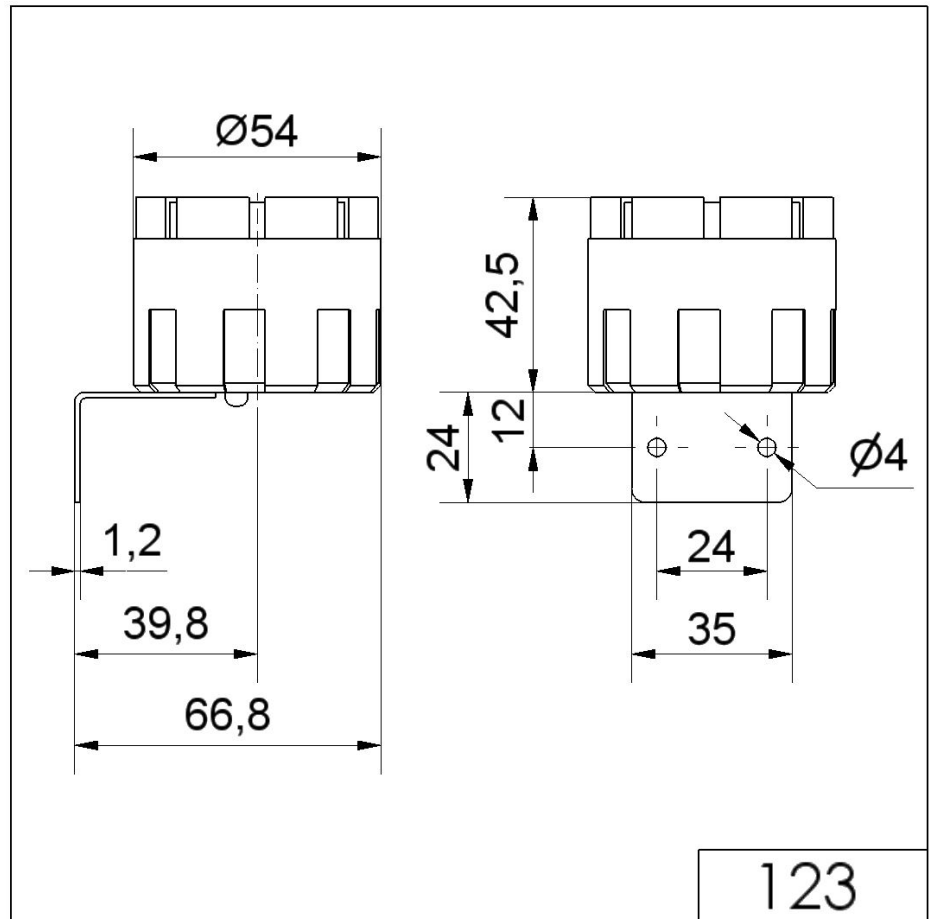

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.