

## Midi free-standing Beacons / EvoSIGNAL Midi TwinFLASH 115-230VAC GN



|           |            |
|-----------|------------|
| Part No.: | 261.220.60 |
| Series:   | EvoSIGNAL  |



| MECHANICAL DATA              |                              |
|------------------------------|------------------------------|
| Height                       | 130 mm                       |
| Diameter                     | 85 mm                        |
| Materials                    | PC<br>PC/ABS                 |
| Dome colour                  | Green                        |
| Housing colour               | Grey                         |
| Protection category          | IP66                         |
| Connection                   | Push-in terminal             |
| cross-sectional area minimum | 0,25mm <sup>2</sup> / 24AWG  |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG  |
| Type of fixing               | Adapter required             |
| Working temperature minimum  | -30°C                        |
| Working temperature maximum  | +60°C                        |
| Weight with packaging        | 199 g                        |
| Product weight               | 157 g                        |
| ELECTRICAL DATA              |                              |
| Operating voltage            | 115-230V                     |
| Operating voltage type       | AC                           |
| Operating voltage frequency  | 50Hz at 230V<br>60Hz at 115V |
| Operating voltage tolerance  | +/- 10%                      |
| Rated operational voltage    | 230 VAC                      |
| Rated operational current    | 100 mA                       |
| Rated inrush current         | 5,5A                         |
| Protection class             | Protection class 2           |
| Pollution degree             | 3                            |
| Overvoltage category         | II                           |
| Isolation voltage            | Ui = 250V; Uimp = 2.500V     |
| OPTICAL DATA                 |                              |
| Light source                 | LED                          |
| Light colour                 | Green                        |
| Optical signal image         | EVS<br>Flash<br>TwinFlash    |
| Flash frequency              | 1 Hz                         |
| Service life optical         | 50,000 h minimum             |



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.


Midi free-standing Beacons / EvoSIGNAL  
**Midi TwinFLASH 115-230VAC GN**

|                               |                            |
|-------------------------------|----------------------------|
| Pulse- & pause Duration [ms]  | 28ON, 164OFF, 28ON, 744OFF |
| <b>APPROVAL DATA</b>          |                            |
| Conforms with CE              | Yes                        |
| WEEE                          | Yes                        |
| Conforms with ATEX-directive  | No                         |
| Conforms with CCC             | Yes                        |
| Conforms with UL              | cULus                      |
| UL Type Rating                | Type 12                    |
| Conforms with FCC             | No                         |
| Conforms with IC              | No                         |
| EAC certificate available     | Yes                        |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.)      |
| Conforms with AS-I            | No                         |
| ICAO Certification            | No                         |
| Conforms with DNV             | No                         |
| Conforms with RoHS CN         | No                         |
| Conforms with VdS             | No                         |
| MTTF-value [years]            | 415                        |



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / EvoSIGNAL  
**Midi TwinFLASH 115-230VAC GN**

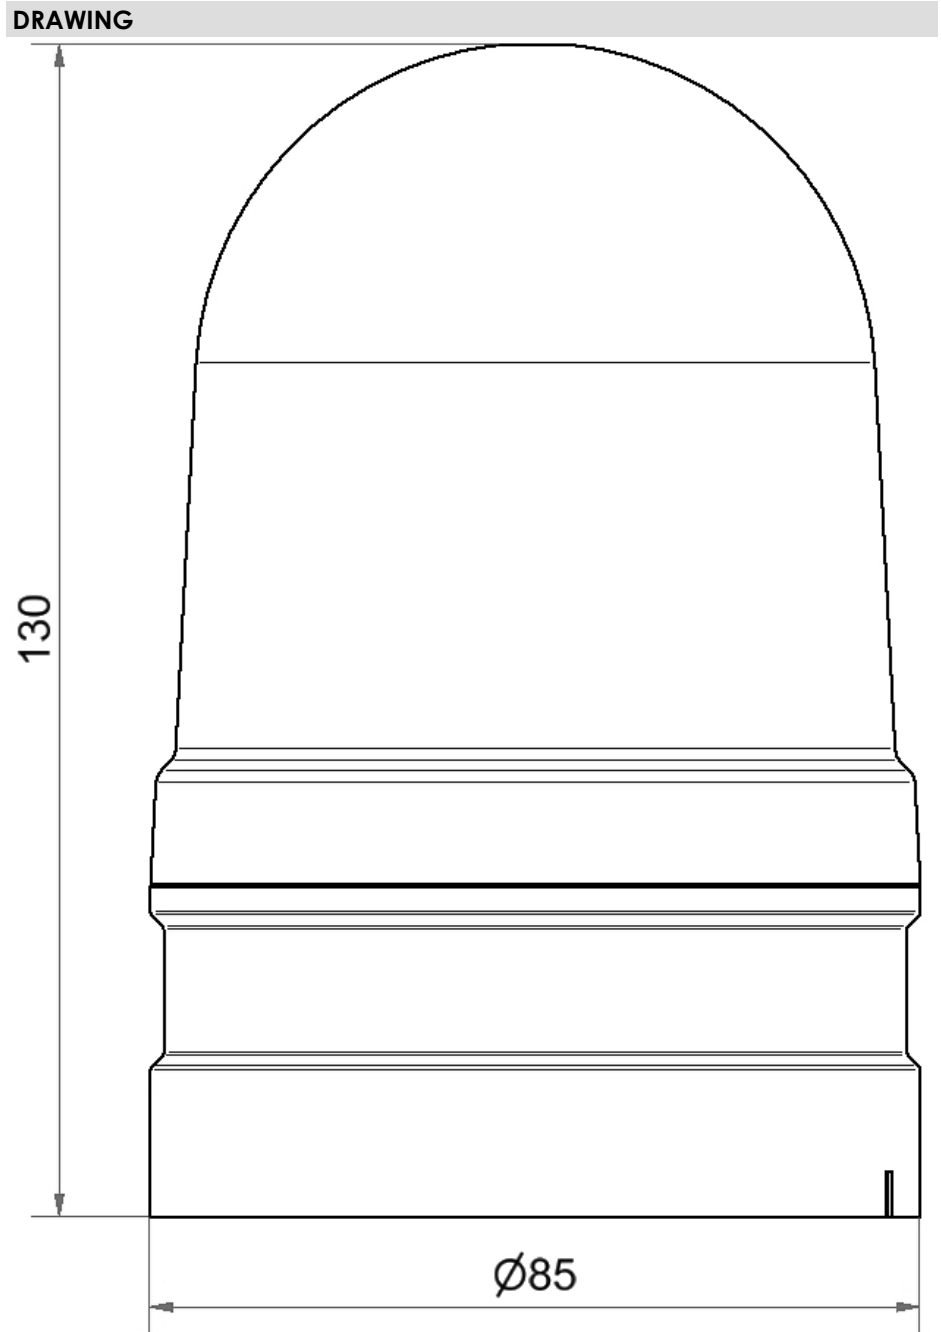

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.