KombiSIGN 40 / ClassicLOOK

Adapter for single hole mount. EM BK




ļ

Part No.:	630.820.00	
Series:	KombiSIGN 40	c UL us
MECHAN	ICAL DATA	
Height		54 mm
Diameter		40 mm
Materials		PC
Housing colour		Black
Protection category		IP66 IP69K
Cable entry		Through hole
Cable entry maximum		d = 9 mm
Type of fixing		Built-in mounting
Working temperature minimum		-30°C
Working temperature maximum		+60°C
Weight with packaging		31 g
Product weight		31 g
ELECTRIC	AL DATA	
Pollution degree		3 In the connection area: 2
APPROVA	AL DATA	
Conforms with CE		No
WEEE		No
Conforms with ATEX-directive		No
Conforms with CCC		No
Conforms with UL		cULus
UL Type Rating		Type 12
Conforms with FCC		No
Conforms with IC		No
EAC certificate available		Yes
Conforms with UKCA (Importer)		No
Conforms with CMIM		No
Conforms with AS-I		No
ICAO Certification		No
Conforms with DNV		No
Conforms with RoHS CN		No
Conforms with VdS		No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

KombiSIGN 40 / ClassicLOOK Adapter for single hole mount. EM BK

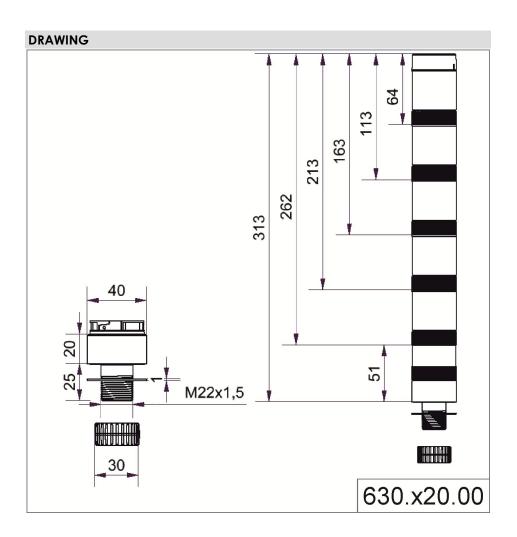

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.