

### Completely pre-assembled Signal Towers / KOMPAKT 37

# K37 plug EM 24VAC/DC BU/WH/GN/YE/RD



Part No.:	698.260.75			<b>RoHS</b>		c(UL)us	UK
Series:	Kompakt 37		7	<b>К</b> ОПЗ	<b>2</b> EU	c <b>GL</b> ) us	CA
MECHAN	ICAL DATA						
Height		243 mm					
Diameter		38 mm					
Materials		PC					
Dome colour		Blue Clear Green Red Yellow					
Housing colour		Black					
Protection category		IP65					
Connection		M12 plug 8-pole					
Cable entry		Membrane grommet					
Cable entry minimum		d = 1 mm					
Cable entry maximum		d = 9 mm					
Tension relief		Pull-out protection					
Type of fixing		Built-in mounting					
Working temperature minimum		-20°C					
Working temperature maximum		+50°C					
Weight with packaging		170 g					
Product weight		116 g					

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	175 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3
	In the connection area: 2

OPTICAL DATA				
Light source	LED			
Light colour	Blue Green Red White Yellow			

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



### Completely pre-assembled Signal Towers / KOMPAKT 37

# K37 plug EM 24VAC/DC BU/WH/GN/YE/RD

Optical signal image	Permanent
Service life optical	50,000 h maximum


APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12 Type 4X
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

# K37 plug EM 24VAC/DC BU/WH/GN/YE/RD

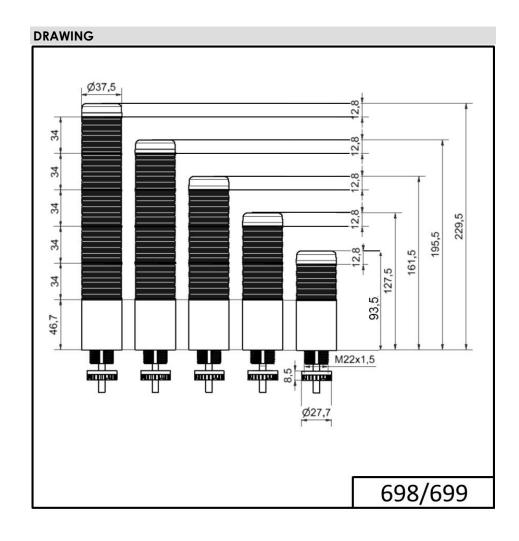

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.