

Ex Signal tower / Ex LED Signal Tower 741 Ex Signal tower WM 24VDC GN/RD

Part No.: 741.110.55




MECHANICAL DATA	
Length	75 mm
Width	76 mm
Height	257 mm
Diameter	38 mm
Materials	PC
Cap colour	Green Red
Housing colour	Black
Protection category	IP65
Connection	Screw terminals
cross-sectional area maximum	2,50mm ² / 14AWG
Cable entry	Screwed cable gland
Cable entry minimum	d = 6 mm
Cable entry maximum	d = 13 mm
Tension relief	Present (conforms to VDI)
Type of fixing	Wall mounting
Service life optical	100,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Ex approval number	PTB 06 ATEX 2005
Atex-guidance	2014/34/EU
Ex label for gas	II2G Ex eb [ib] mb op is IIC
Ex label for dust	II2D Ex tb IIIC T80°C-160°C Db
Total weight in g	755 g
Net weight in g	686 g
ELECTRICAL DATA	
Voltage	24V
voltage type	DC
Total current consumption	90 mA
OPTICAL DATA	
Light source	LED
Light colour	Green Red
Optical signal image	Duration



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Ex Signal tower / Ex LED Signal Tower 741
Ex Signal tower WM 24VDC GN/RD

DRAWING

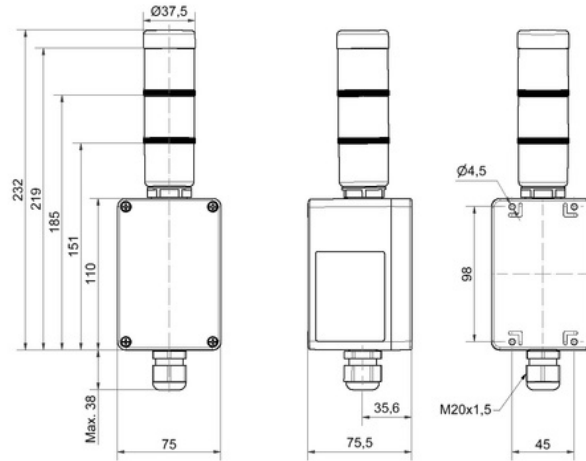

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.