


KombiSIGN 70 / Audible Devices 844

**Buzzer element contin/pulse 230VAC BK**



<b>Part No.:</b>	<b>844.118.68</b>
<b>Series:</b>	<b>KombiSIGN 70</b>

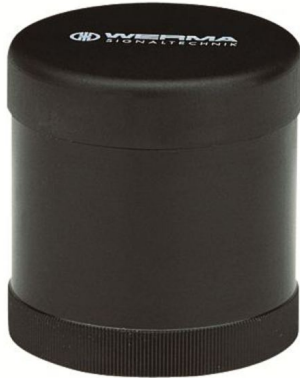

**MECHANICAL DATA**

Height	72 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP54
Service life optical	5,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Total weight in g	99 g
Net weight in g	85 g

**ELECTRICAL DATA**


Voltage	230V
voltage type	AC
Total current consumption	35 mA
Starting current	450 mA

**ACUSTICAL DATA**

Volume/dB(max) at 1m distance	85 dB
Acoustic signal image	Continuous tone Pulse tone
Audio frequency	1750 Hz

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / Audible Devices 844

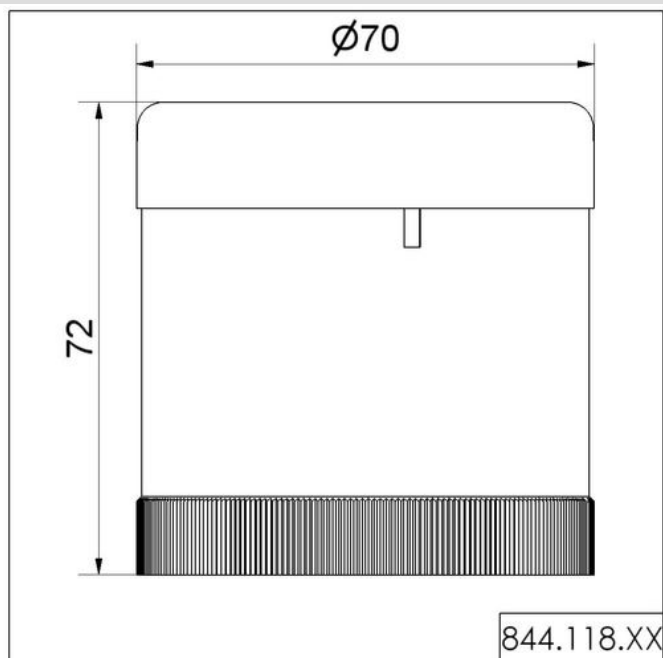**Buzzer element contin/pulse 230VAC BK****DRAWING**

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.