

KombiSIGN 50 / Buzzer Devices 849

**Buzzer element contin/pulse 24VAC/DC BK**



Part No.:	849.000.75
Series:	KombiSIGN 50



MECHANICAL DATA	
Height	72 mm
Diameter	52 mm
Materials	PC
Housing colour	Black
Protection category	IP54
Service life optical	5,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	60 g
Product weight	53 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	30 mA
Rated inrush current	450 mA
Protection class	Protection class 2
Pollution degree	3

ACUSTICAL DATA	
Volume/dB(max) at 1m distance	85 dB(A)
Acoustic signal image	Continuous tone Pulse tone
Audio frequency	2500 Hz




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / Buzzer Devices 849

**Buzzer element contin/pulse 24VAC/DC BK**

## DRAWING

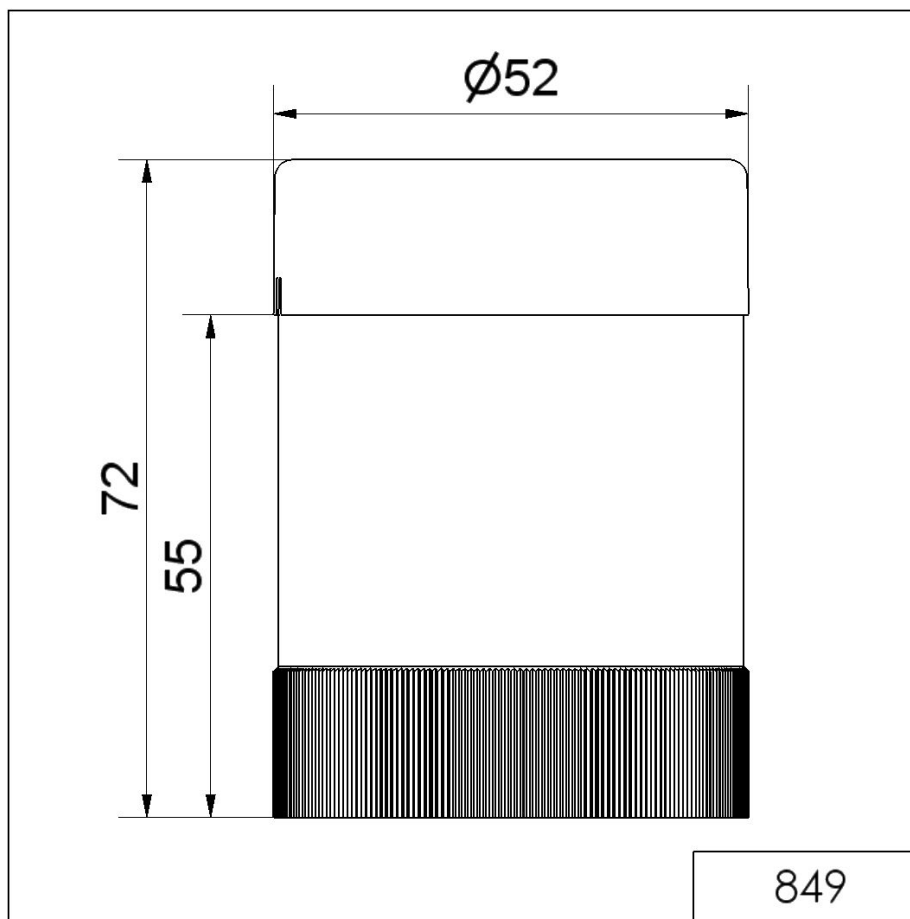

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.