

# Coaxial RF Transformer

50Ω 0.01 to 125 MHz

## FTB-1-6+



CASE STYLE: H16-1

BNC Connectors

Model

FEMALE/FEMALE FTB-1-6\*A15+

MALE/FEMALE FTB-1-6\*C15+

BRACKET (OPTION "B")

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	250mW
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

### Coaxial Connections

	Marking
PRIMARY	BAL
SECONDARY	UNBAL

### Features

- balanced to single-ended
- balanced port: isolated Female BNC


### Applications

- DC Block

### Transformer Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
1	0.01-125	0.01-125	0.05-50	0.1-25

### Outline Drawing

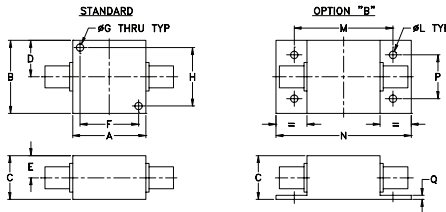

### Outline Dimensions (inch/mm)




A	B	C	D	E	F	G	H
1.25	1.25	.81	.63	.41	1.000	.125	1.000
31.75	31.75	20.57	16.00	10.41	25.40	3.18	25.40

J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.19	.750	.06	grams
--	--	3.18	42.88	55.63	19.05	1.52	70.0

### Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
0.01	0.45	9.03
0.02	0.19	14.65
0.05	0.10	22.68
0.10	0.10	29.17
0.20	0.10	34.28
25.00	0.38	12.89
50.00	0.89	8.56
62.67	0.97	7.71
118.44	1.28	6.04
125.00	1.29	6.02

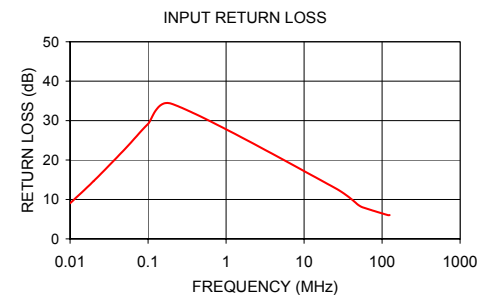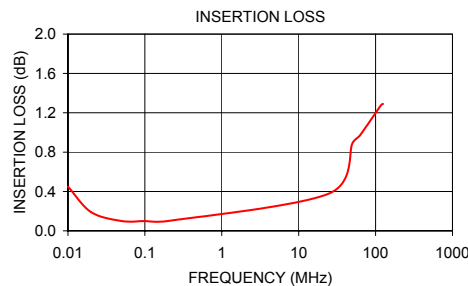

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

