


Product description	<b>M12-A Connecting cable male cable connector - female cable connector, Contacts: 4, unshielded, moulded on the cable, IP69K, UL, PUR, black, 4 x 0.34 mm<sup>2</sup>, 1 m</b>
Area	-
Part no.	<b>M12-A series 763 77 3430 3429 50004-0100</b>


### Illustration



### Scale drawing

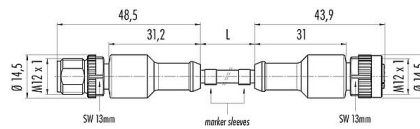

### Contact arrangement (Plug-in side)

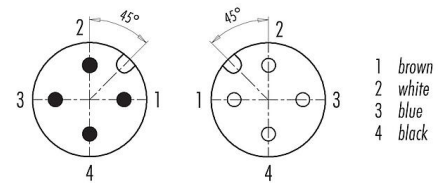

## Technical data

### General features

Part no.	<b>77 3430 3429 50004-0100</b>
	Alternative part no.: 79 5001 10 04
Connector design	Connecting cable male cable connector - female cable connector
Type standard	DIN EN 61076-2-101
Cable length	1 m
Version	Connecting cable
Connector locking system	screw
Termination	moulded on the cable
Degree of protection	IP69K
Cross-sectional area	0.34 mm <sup>2</sup> / AWG 22
Temperature range from/to	-25 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	79
Customs tariff number	85444290

### Electrical parameters

Rated voltage	250 V
Rated impulse voltage	2500 V
Rated current (40 °C)	4.0 A
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

### Material

Housing material	PUR
Contact body material	PUR
Contact material	CuZn (brass) / CuSn (bronze)

Product description	<b>M12-A Connecting cable male cable connector - female cable connector, Contacts: 4, unshielded, moulded on the cable, IP69K, UL, PUR, black, 4 x 0.34 mm<sup>2</sup>, 1 m</b>
-	-
Area	<b>M12-A series 763</b>
Part no.	<b>77 3430 3429 50004-0100</b>

Contact plating	Au (gold)
Locking material	Zinc die-cast nickel-plated
REACH SVHC	None (No pollutants)
SCIP number	SCIP-number not available

### Authorization/approvals

Approvals	UL
-----------	----

### Classifications

eCl@ss 11.1	27-06-03-11
ETIM 9.0	EC002638

### Cable data - Structure of the cable

Cable diameter	4.7 mm
Cross section	4 x 0.34 mm <sup>2</sup>
Sheath material	PUR
Single-lead insulation	PP9Y halogen-free
Single-lead structure	43 x 0.10 mm
Cable color	black

### Cable data - Electrical properties

Conductor resistance	60 Ω/Km (20°C)
----------------------	----------------

### Cable data - Mechanical properties

Bending radius, fixed cable	≥ 5 x Ø
Bending radius, moving cable	≥ 10 x Ø
Bending cycles	> 5 million
Permitted acceleration	5 m/s <sup>2</sup>
Travel distance, horizontal	</= 5 m
Travel distance, vertical	</= 5 m
Travel speed	≤ 200 m/min

### Cable data - Thermal properties

Temperature range cable in move from/to	-25 °C / 90 °C (UL +80 °C)
Temperature range cable fixed from/to	-50 °C / 90 °C

### Cable data - Other features

Halogen free	yes
--------------	-----

Product description	<b>M12-A Connecting cable male cable connector - female cable connector, Contacts: 4, unshielded, moulded on the cable, IP69K, UL, PUR, black, 4 x 0.34 mm<sup>2</sup>, 1 m</b>
-	-
Area	<b>M12-A series 763</b>
Part no.	<b>77 3430 3429 50004-0100</b>

### General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).