
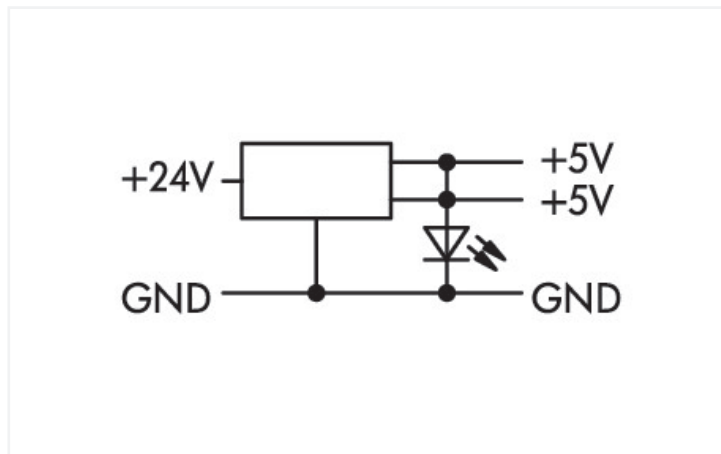



Data Sheet | Item Number: 859-801

DC/DC Converter; 24 VDC input voltage; 5 VDC output voltage; 0.4 A output current; 2,50 mm²; gray

<https://www.wago.com/859-801>

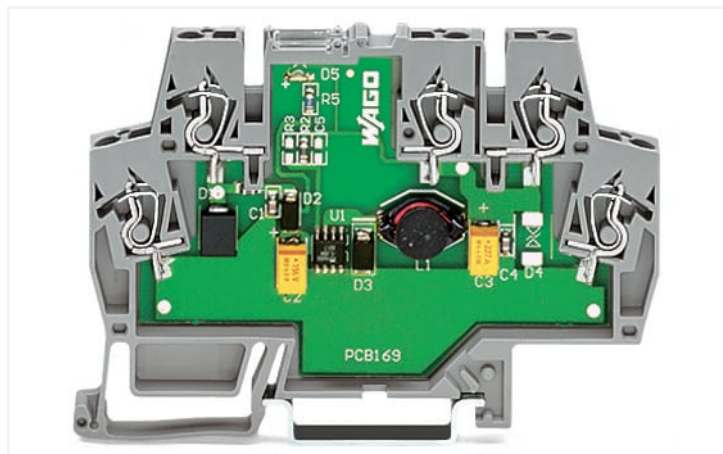

Color: ■ gray

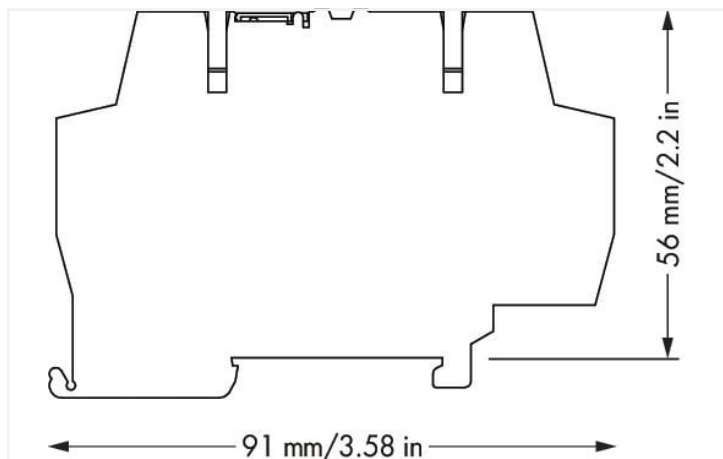

Dimensions in mm

End and intermediate plate (859-525) is included

Technical data

Input

Nominal input voltage $U_{i, \text{nom}}$	DC 24 V
Input voltage range	DC 10 ... 30 V
Nominal mains frequency range	0 Hz
Mains failure hold-up time	≥ 1 ms

Output

Nominal output voltage $U_{o, \text{nom}}$	DC 5 V
Output voltage range	± 2 %
Nominal output current $I_{o, \text{nom}}$	0.5 A (single, 10 mm spacing); 0.4 A (in a row)
Operating voltage feedthrough	≤ 2 %
Load regulation	≤ 0.5 %
Residual ripple	≤ 150 mV
Switching frequency	20 kHz (Nominal)
Overload behavior	Temporary no damage (short circuit of the output for 1 minute)

Signaling and communication

Signaling	1 x LED
-----------	---------

Efficiency/power losses

Efficiency (typ.)	70 %
-------------------	------

Circuit protection

Internal fuse	TVS diode
---------------	-----------

Safety and protection

Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	Yes
Pollution degree	2
Series operation	No

Connection data

Number of jumper slots	2
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 859 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 14 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	6 mm / 0.236 inches
Height	91 mm / 3.583 inches
Height from upper-edge of DIN-rail	56 mm / 2.205 inches
Depth	91 mm / 3.583 inches
Depth from upper-edge of DIN-rail	56 mm / 2.205 inches

Mechanical data

Housing design	Rail-mount terminal block
Mounting type	DIN-35 rail

Material data

Color	gray
Fire load	0.48 MJ
Weight	34.6 g

Environmental requirements

Ambient temperature (operation)	0 ... +40 °C
---------------------------------	--------------

Standards and specifications

Conformity marking	CE
--------------------	----

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	US
GTIN	4050821021568
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC_Certificate_RU_C-DE.AM02.B.00115_19
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 508	E175199 Sec.4

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for hazardous areas



Approval	Standard	Certificate Name
CCC CNEX	CNCA-C23-01	2021312304000982 (Ex ec IIC T4 Gc)
UKEx WAGO GmbH & Co. KG	EN 60079-0	WAGO22UKEX007X_ec
UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)	ANSI/ISA 12.12.01	E198726

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 859-801



Documentation

Bid Text

859-801	19.02.2019	xml 4.23 KB	
859-801	06.02.2015	doc 26.00 KB	

Instruction Leaflet

CCC Ex (Additional information)	26.04.2023	pdf 132.68 KB	
DC/DC-Wandler		pdf 79.43 KB	

CAD/CAE-Data

CAD data

2D/3D Models 859-801



CAE data

EPLAN Data Portal 859-801	
WSCAD Universe 859-801	
ZUKEN Portal 859-801	