


NOTES:


- 1. MATERIALS AND FINISHES:
 BODY, CRIMP BODY & COUPLING NUT - STAINLESS STEEL, GOLD PLATING
 CONTACT - BeCu, GOLD PLATING
 INSULATORS - PTFE, NATURAL
 RETAINING RING - BeCu, NATURAL
 GASKET - SILICONE RUBBER, RED
 FERRULE - COPPER, GOLD PLATING
 HEAT SHRINK TUBE - POLYOLEFIN, BLACK
- 2. ELECTRICAL:
 A. IMPEDANCE: 50 OHM
 B. FREQUENCY RANGE: DC - 12.4 GHz
- 3. MECHANICAL:
 A. DURABILITY: 500 CYCLES MIN.
 B. TEMPERATURE RANGE: -65°C TO +165°C

- 4. PACKAGING:
 A. QUANTITY: SINGLE PACK
 B. MARKING: PACKING TO BE MARKED
 "AMPHENOL RF, 901-9601-3 AND DATE CODE"
 - 5. CABLE ASSEMBLY INSTRUCTIONS:
 A. FOR CABLE STRIPPING AND ASSEMBLY INSTRUCTIONS SEE
 AMPHENOL SPEC 349-50180, SHEET 7.
 B. CRIMP FERRULE WITH AMPHENOL TOOL 227-944 & DIE SET
 227-1221-03 CAVITY 'A' (M22520/5-03 CLOSURE 'A') (0.128" HEX).
- 6 SHOWS CABLE ENTRY DIMENSIONS.

REVISIONS				
REV	DESCRIPTION	DATE	ECN	APPR
--	RELEASE TO MFG.	--	--	--
J	REDRAWN IN CREO & COD SHEET ADDED	09-SEP-20	15318	MR

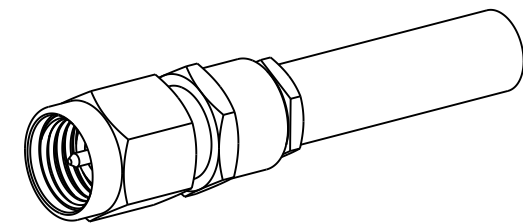

SCALE 2.000

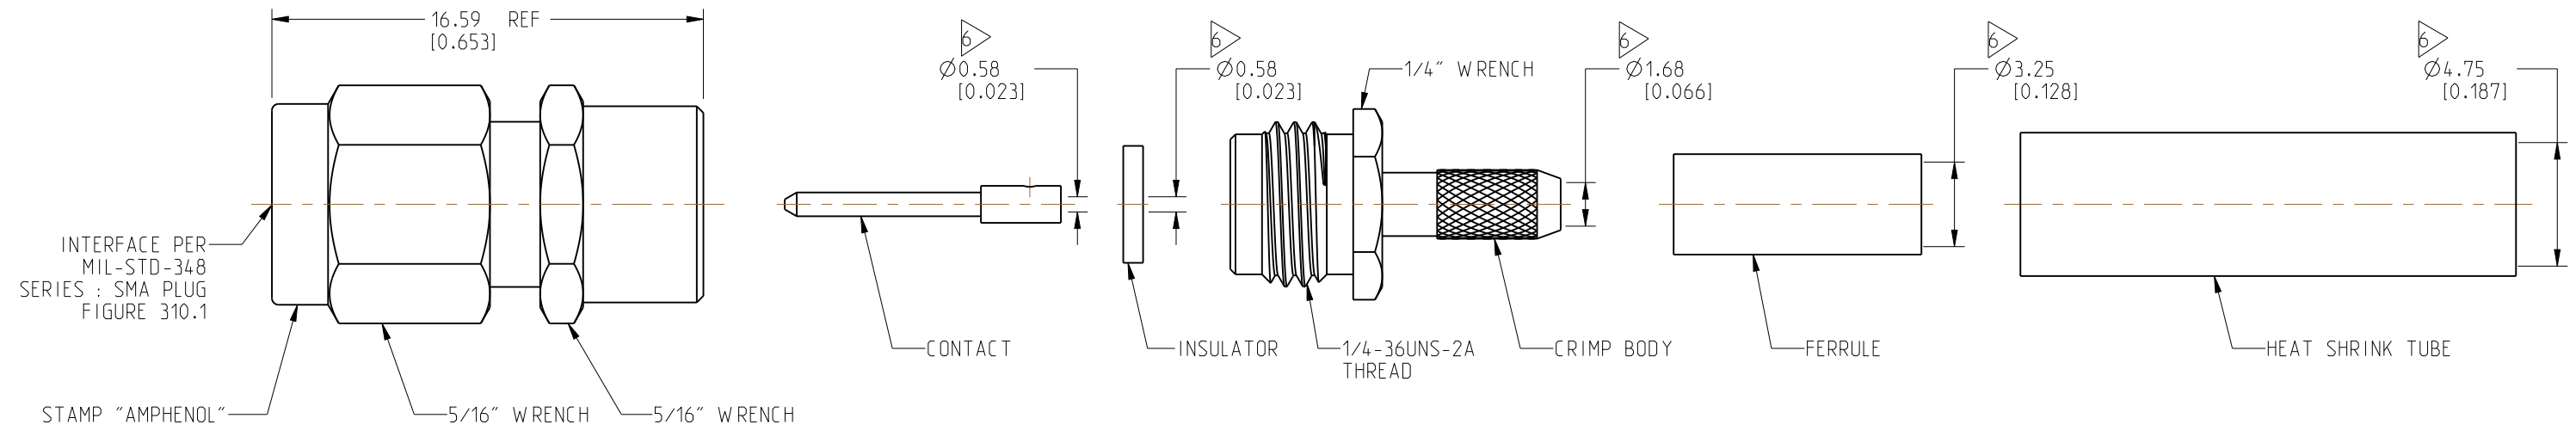

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC (INCHES) AND TOLERANCES ARE: $<0.5\text{mm} = \pm 0.05\text{mm}$ [$<0.020 = \pm 0.002$] $>0.5 - 6\text{mm} = \pm 0.1\text{mm}$ [$>0.020 - 0.236 = \pm 0.004$] $>6.00 - 30\text{mm} = \pm 0.2\text{mm}$ [$>0.236 - 1.181 = \pm 0.008$] $>30.00 - 120\text{mm} = \pm 0.3\text{mm}$ [$>1.181 - 4.725 = \pm 0.012$] ANGLES = $\pm 1^\circ$		MATERIAL SEE NOTES		TITLE SMA STR PLUG FOR RG 174, 179, 187, 188 & 316/U CABLE		Amphenol RF	
THIRD ANGLE PROJ.		REFERENCE DOR 313431 & 611X-708		ENGINEER O.BARTHELMES		DATE 21-MAY-20		SHEET NO. 2 OF 2	
SIZE B		DRAWING NO. 901-9601-3		ITEM NO. 901-9601-3		PART NO. 901-9601-3		REV J	