



# Absorptive SP3T PIN Diode Switch Operating From 8 GHz to 12 GHz Up to 0.1 Watts (+20 dBm) and Field Replaceable SMA

## PIN Diode Switches Technical Data Sheet

PE71S6246

### Features

- SP3T Absorptive Switch
- 8 GHz to 12 GHz
- Insertion Loss 2.8 dB max
- Isolation 70 dB min
- Power Input 20 dBm CW max
- Field Replaceable Connectors

### Applications

- Test & Measurement
- Military Communication
- Commercial Communication
- Wireless Communications
- SATCOM
- Military Electronic Systems
- RF Test Stations

### Description

The PE71S6246 is a Single Pole Triple Throw (SP3T) Absorptive PIN Diode Switch that operates from 8 GHz to 12 GHz. The output port is terminated in 50 ohms when switched in the isolation (off) state. Performance includes 2.8 dB max insertion loss, 70 dB min isolation, and 100 nsec max switching speed. The design incorporates TTL compatible driver circuitry for accurate logic control. Operational temperature range is -40°C to +85°C and dual voltage controls of +5 DC and -15 DC are required. The rugged package is designed to meet a series of MIL-STD-202F environmental conditions including humidity, shock, vibration, and temperature cycle. Package interfaces include solder terminals and female SMA connectors.

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	8		12	GHz
Impedance		50		Ohms
Insertion Loss			2.8	dB
Isolation	70			dB
Switching Time			100	ns
Input Power (CW)			0.1	Watts
Survival Power			1	Watts
Positive Operating Voltage		5		Vdc
Negative Operating Voltage		-15		Vdc
Current @ 5 Vdc		150		mA
Current @ -15 Vdc		100		mA
Operating Temperature	-40		+85	deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SP3T PIN Diode Switch Operating From 8 GHz to 12 GHz Up to 0.1 Watts \(+20 dBm\) and Field Replaceable SMA PE71S6246](#)



Absorptive SP3T PIN Diode Switch Operating From 8 GHz to 12 GHz Up to 0.1 Watts (+20 dBm) and Field Replaceable SMA

PIN Diode Switches Technical Data Sheet

PE71S6246

**Mechanical Specifications**

**Size**

Length	1.5 in [38.1 mm]
Width	1.5 in [38.1 mm]
Height	0.4 in [10.16 mm]
Weight	0.096 lbs [43.54 g]
Finish	Blue Paint

**Configuration**

Design	Absorptive, SP3T
RF Connector	SMA Female
RF Connector Option	Field Replaceable
TTL Control Connector	Solder Pin

**Environmental Specifications**

**Temperature**

Operating Range	-40 to +85 deg C
Storage Range	-55 to +125 deg C

Humidity	MIL-STD-202F, Method 103B, Condition B
Shock	MIL-STD-202F, Method 213B, Condition B
Vibration	MIL-STD-202F, Method 204D, Condition B
Altitude	MIL-STD-202F, Method 105C, Condition B
Temperature Cycling	MIL-STD-202F, Method 107D, Condition A
ESD Sensitivity	ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.



**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SP3T PIN Diode Switch Operating From 8 GHz to 12 GHz Up to 0.1 Watts \(+20 dBm\) and Field Replaceable SMA PE71S6246](#)





Absorptive SP3T PIN Diode Switch Operating From 8 GHz to 12 GHz Up to 0.1 Watts (+20 dBm) and Field Replaceable SMA

PIN Diode Switches Technical Data Sheet

PE71S6246

Typical Performance Data

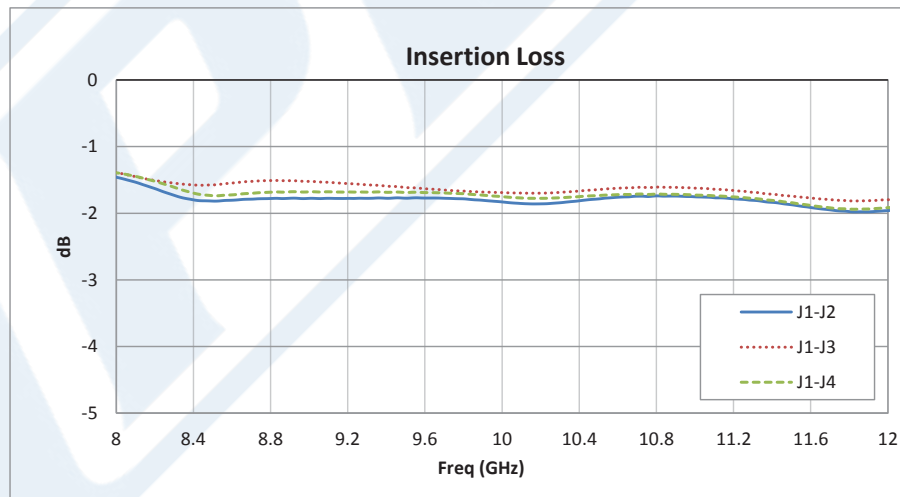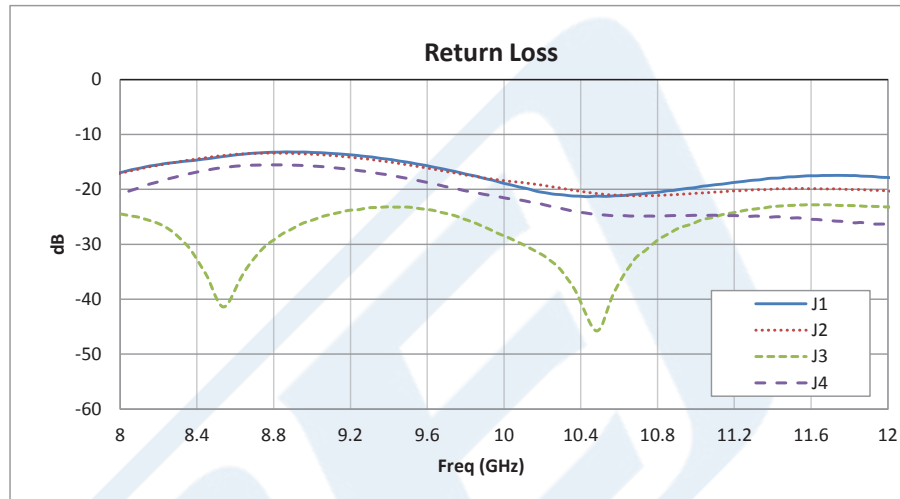


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SP3T PIN Diode Switch Operating From 8 GHz to 12 GHz Up to 0.1 Watts \(+20 dBm\) and Field Replaceable SMA PE71S6246](#)



Absorptive SP3T PIN Diode Switch Operating From 8 GHz to 12 GHz Up to 0.1 Watts (+20 dBm) and Field Replaceable SMA

PIN Diode Switches Technical Data Sheet

PE71S6246

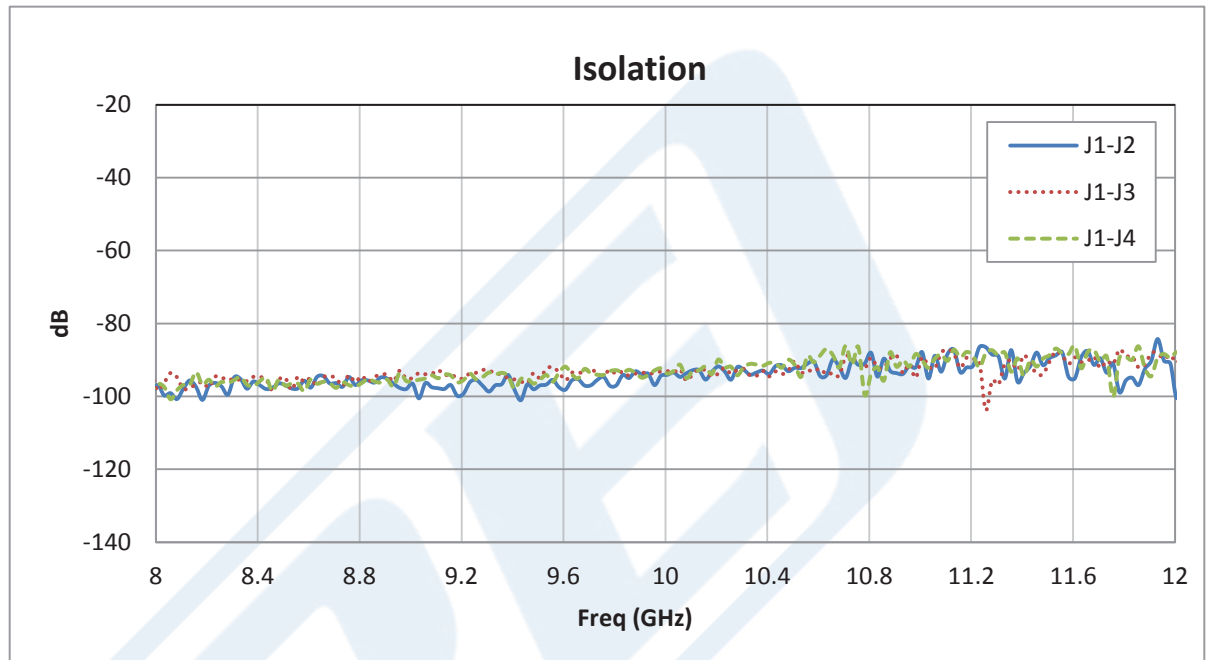

Absorptive SP3T PIN Diode Switch Operating From 8 GHz to 12 GHz Up to 0.1 Watts (+20 dBm) and Field Replaceable SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Absorptive SP3T PIN Diode Switch Operating From 8 GHz to 12 GHz Up to 0.1 Watts \(+20 dBm\) and Field Replaceable SMA PE71S6246](https://www.pasternack.com/absorptive-sp3t-pin-diode-switch-12-ghz-20-dbm-sma-pe71s6246-p.aspx)

URL: <https://www.pasternack.com/absorptive-sp3t-pin-diode-switch-12-ghz-20-dbm-sma-pe71s6246-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE71S6246 CAD Drawing

Absorptive SP3T PIN Diode Switch Operating From 8 GHz to 12 GHz  
Up to 0.1 Watts (+20 dBm) and Field Replaceable SMA

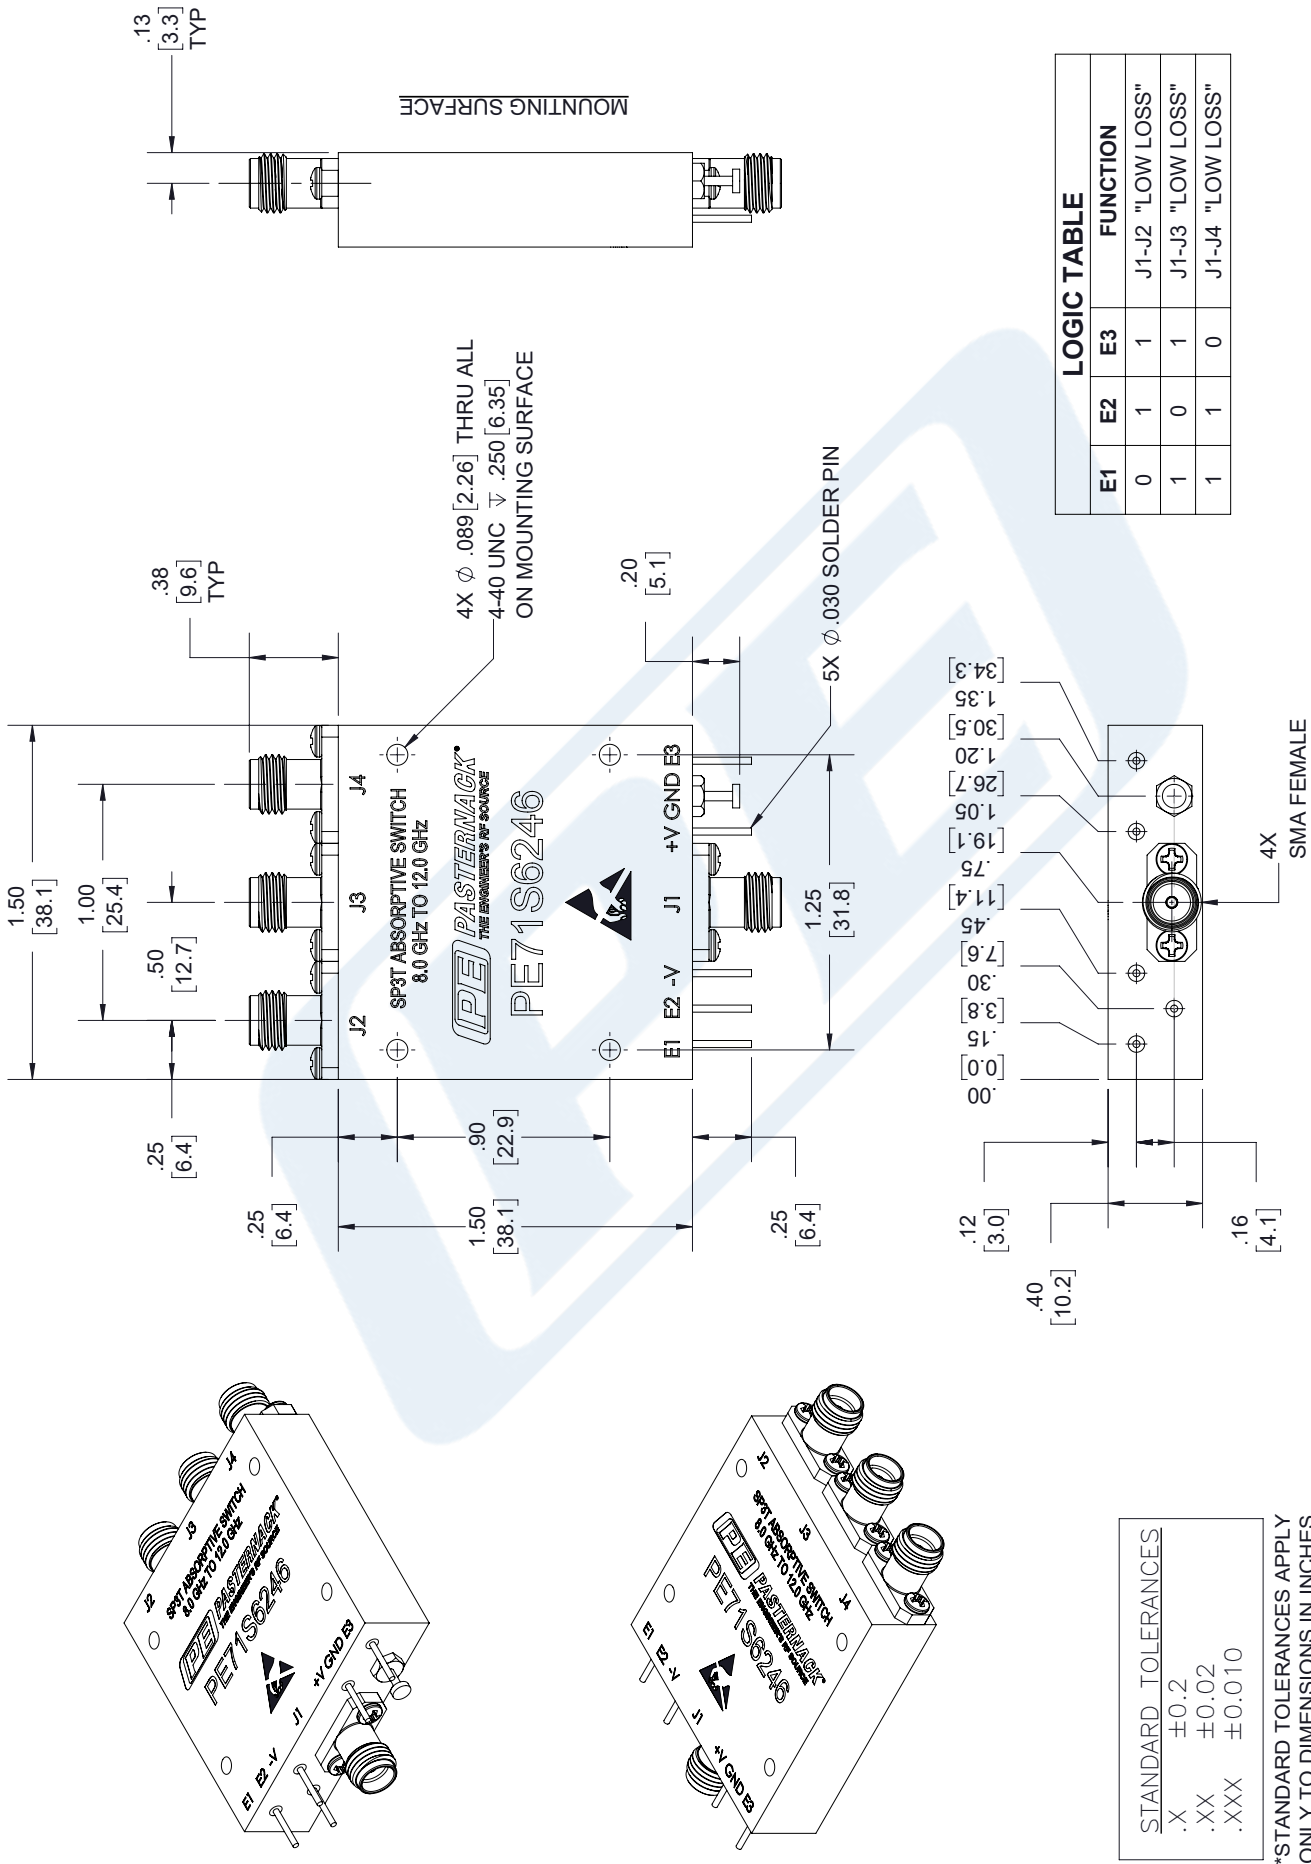

DWG TITLE  
**PE71S6246**

CAGE CODE **53919**

**PE PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAD FILE 040218

SCALE N/A

SIZE A 7361