

Voltage Controlled Oscillator

ROS-2360WR+

50Ω 1430 to 2360 MHz

The Big Deal:

- Low Phase Noise
- Good Pushing
- High Power Output



CASE STYLE: CK605

Product Overview:

The ROS-2360WR+ is a Voltage Controlled Oscillator, designed to operate from 1430 to 2360 MHz for signal analyzer applications. The ROS-2360WR+ is packaged in a metal case (size of .500" x .500" x .180") to shield against unwanted signals and noise.

Key Features

Feature	Advantages
Low Phase Noise: -100 dBc/Hz typ at 10kHz offset	Low phase noise improves system EVM (Error Vector Magnitude).
High Power Output, +8 dBm typ.	Reduces amplification requirements and improves immunity to external noise sources.
Good Pushing, 0.7 MHz/V typ.	Provides increased immunity against noisy DC lines and improves output frequency stability vs. variations in supply voltage.
Robust design and construction	Each internal component of the ROS-2360WR+ is bonded to the substrate, providing better immunity to microphonics, reduced phase hit, and decreased tombstoning risk during subsequent reflow operations.
Small size, .500" x .500" x .180"	The small size enables the ROS-2360WR+ to be used in compact designs.

Voltage Controlled Oscillator

ROS-2360WR+

Linear Tuning 1430 to 2360 MHz

Features

- wide band
- low phase noise, -100 dBc/Hz typ. @ 10kHz offset
- low pushing, 0.7 MHz/V typ.
- aqueous washable



CASE STYLE: CK605

Applications

- wireless communications
- signal analyzer

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING					NON HARMONIC SPURIOUS (dBc)		HARMONICS (dBc)		PULLING pk-pk @12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)	SENSITIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)	Typ.	Typ.	Typ.	Typ.			Typ.	Max.
ROS-2360WR+	1430	2360	+8	-73	-100	-122	-142	0.5	20	41-74	40	95	-90	-19	-	9	0.7	5	35	

Pin Connections

RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	22V
All specifications	50 ohm system


Permanent damage may occur if any of these limits are exceeded.

Tape & Reel: F37


7" Reels with 10, 20, 50, 100 devices
13" Reels with 200, 500 devices

Environmental Ratings: ENV65

Outline Drawing

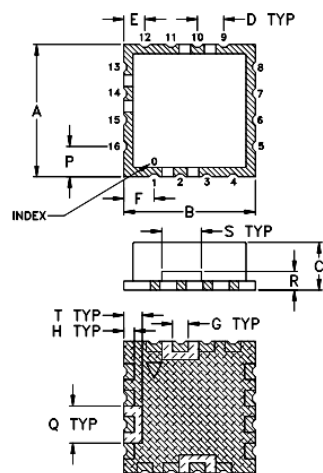


PCB Land Pattern

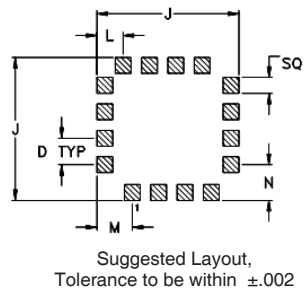

METALLIZATION
 SOLDER RESIST

Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

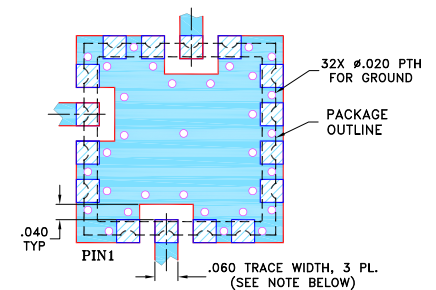

NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch/mm)







A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070		grams
12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78		1.0

Performance Data & Curves*

ROS-2360WR+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			I _{cc} (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (kHz)	PHASE NOISE at 1895 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	91.99	1183.5	1168.9	1157.6	8.33	7.82	7.24	25.25	-14.8	-23.6	-42.3	0.67	3.31	-71.53	-99.1	-120.0	-140.3	1.0	-73.68
0.50	82.65	1228.4	1214.8	1204.6	8.60	8.08	7.52	25.38	-14.3	-26.4	-41.5	0.95	3.81	-72.40	-99.6	-120.6	-140.8	2.0	-82.38
2.00	69.77	1345.7	1334.2	1325.8	9.27	8.67	8.13	25.81	-13.4	-34.8	-39.9	1.29	4.04	-75.30	-100.8	-122.2	-142.6	3.5	-89.74
3.00	68.08	1414.9	1403.9	1395.8	9.59	8.90	8.30	26.03	-13.2	-36.3	-40.4	1.35	4.09	-73.31	-101.2	-122.9	-143.3	6.0	-96.09
4.00	68.81	1483.4	1472.0	1462.9	9.69	8.98	8.38	26.10	-12.6	-35.1	-43.7	1.61	4.80	-73.96	-100.4	-122.6	-142.9	8.5	-99.51
5.00	71.51	1552.1	1540.8	1532.0	9.80	9.15	8.60	26.29	-12.8	-34.1	-33.2	1.58	4.19	-73.10	-100.5	-122.9	-143.2	10.0	-100.78
6.00	72.03	1623.6	1612.3	1603.4	9.79	9.08	8.57	26.37	-13.8	-33.6	-32.6	1.51	7.60	-74.21	-100.6	-122.9	-143.4	20.8	-108.82
7.00	73.41	1695.7	1684.3	1675.6	9.64	9.03	8.56	26.46	-13.7	-34.1	-32.2	1.27	5.28	-74.24	-100.8	-123.2	-144.0	35.5	-113.88
8.00	73.72	1767.5	1757.8	1749.5	9.46	9.06	8.65	26.64	-13.6	-33.0	-30.3	0.83	7.26	-73.92	-101.0	-123.0	-144.2	60.7	-119.16
9.00	70.44	1840.1	1831.5	1823.2	9.23	8.87	8.42	26.64	-14.7	-34.3	-30.7	0.55	6.51	-73.36	-100.9	-123.6	-144.5	86.7	-122.21
10.00	68.39	1910.8	1901.9	1893.9	8.91	8.63	8.27	26.63	-16.1	-36.2	-32.6	0.18	7.61	-73.57	-100.8	-123.6	-144.5	100.0	-123.57
11.00	65.76	1978.2	1970.3	1962.8	8.63	8.51	8.20	26.71	-18.4	-36.2	-31.4	0.13	7.18	-73.44	-101.4	-124.0	-144.9	148.1	-127.27
12.00	61.44	2044.1	2036.1	2028.4	8.43	8.22	7.89	26.65	-23.2	-29.2	-31.9	0.25	8.19	-74.54	-100.7	-123.7	-144.5	177.0	-128.62
13.00	58.96	2106.0	2097.5	2089.9	7.99	7.93	7.73	26.57	-24.2	-27.4	-33.1	0.31	6.45	-74.13	-100.3	-123.4	-143.9	211.6	-130.27
14.00	54.94	2165.1	2156.5	2148.9	7.63	7.60	7.45	26.49	-22.7	-26.1	-34.4	0.21	6.59	-74.31	-100.9	-123.2	-143.8	302.4	-133.42
15.00	52.99	2220.0	2211.4	2204.3	7.30	7.43	7.27	26.48	-23.7	-27.0	-36.0	0.16	9.24	-75.04	-101.0	-123.6	-144.3	361.5	-134.31
16.00	47.58	2273.1	2264.4	2256.6	6.96	6.90	6.72	26.35	-24.7	-26.1	-37.6	0.17	7.66	-73.47	-100.4	-123.3	-143.8	507.5	-138.20
17.00	47.15	2320.7	2312.0	2304.9	6.45	6.81	6.74	26.36	-25.5	-26.6	-38.8	0.26	3.98	-74.44	-101.1	-123.6	-144.2	606.7	-139.72
18.00	41.21	2368.2	2359.1	2350.9	6.30	6.19	6.01	26.20	-25.1	-26.3	-40.8	0.62	8.48	-72.52	-100.4	-122.7	-143.1	851.6	-142.87
20.00	36.51	2450.6	2441.2	2433.1	5.57	5.75	5.66	26.10	-24.8	-27.1	-44.1	0.86	5.88	-73.88	-99.9	-122.6	-143.2	1000.0	-144.20

*at 25°C unless mentioned otherwise

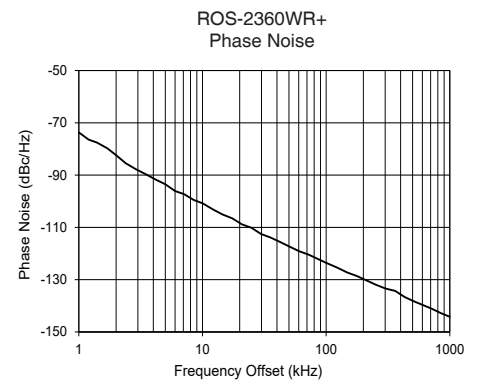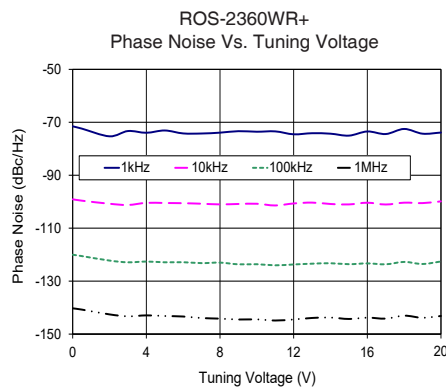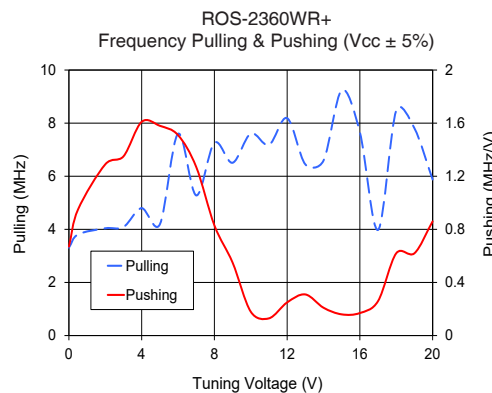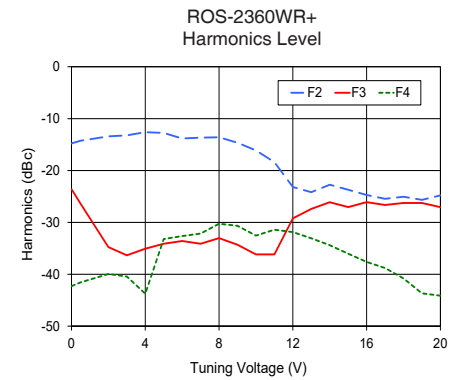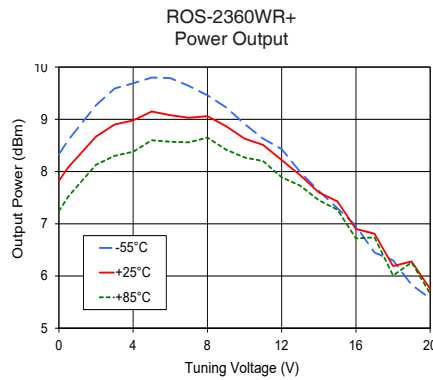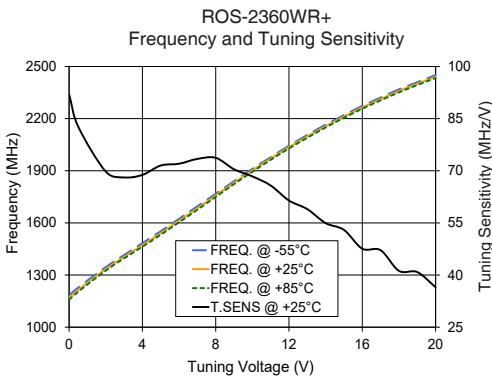

Additional Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

