Completely pre-assembled Signal Towers / eSIGN

eSIGN 15 Segments with Siren



ļ

Part No.:	657.600.55	
Series:	eSIGN	
MECHAN	IICAL DATA	
Height		372 mm
Diameter		72 mm
Materials		PC
Dome colour		Clear
Housing colour		Black
Protection category		IP66 IP69K
Connection		M12 plug 8-pole
Type of fixing		Base mounting Tube mounting
Working temperature minimum		n -30°C
Working temperature maximum		m +60°C
Weight with packaging		849 g
Product weight		792 g
IK-Code (IEC 62262)		IK08
ELECTRIC		
Operating voltage		24V
Operating voltage type		DC
Operating voltage tolerance		+/- 10%
Rated operational voltage		24 VDC
Rated operational current		620 mA
Rated inrush current		800 mA
Protection class		Protection class 3
Pollution degree		3
Overvoltage category		I
Isolation voltage		Ui = 50V / Uimp = 330V
Request to external PSU		SELV/PELV
connectivity		Digital entrance USB
OPTICAL	DATA	
Light source		LED
Light colour		MC >1.000.000 colours
Optical signal image		Blink Double flash Flash Permanent Revolving Triple flash

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / eSIGN

eSIGN 15 Segments with Siren


Blink frequency	Configurable
Service life optical	50,000 h maximum
ACOUSTIC DATA	
Volume (max) at 1m distance	105 dB
Acoustic signal image	Multi-tone
Number of tones	10 tone
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	No
Conforms with UL	CULus
UL Type Rating	Type 4/4X/12/13
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / eSIGN

eSIGN 15 Segments with Siren

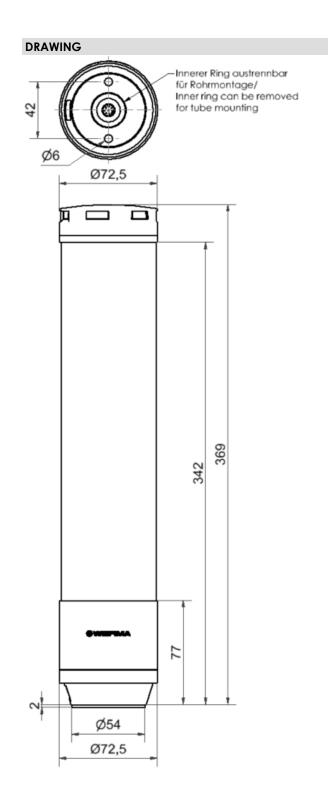

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.