

Completely pre-assembled Signal Towers / deSIGN 42  
**Signal tower deSIGN42 EM 24VDC GN/YE/RD**



<b>Part No.:</b>	<b>694.000.55</b>
<b>Series:</b>	<b>deSIGN 42</b>



**MECHANICAL DATA**

Height	255 mm
Diameter	42 mm
Materials	PC Stainless steel
Cap colour	Clear
Housing colour	Silver
Protection category	IP65
Connection	Cable
Cable length	2000 mm
Type of fixing	Built-in mounting
Service life optical	50,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Total weight in g	834 g
Net weight in g	753 g

**ELECTRICAL DATA**

Voltage	24V
voltage type	DC
Total current consumption	50 mA
Starting current	500 mA


**OPTICAL DATA**

Light source	LED
Light colour	Green Red Yellow
Optical signal image	Duration

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / deSIGN 42  
**Signal tower deSIGN42 EM 24VDC GN/YE/RD**

**DRAWING**

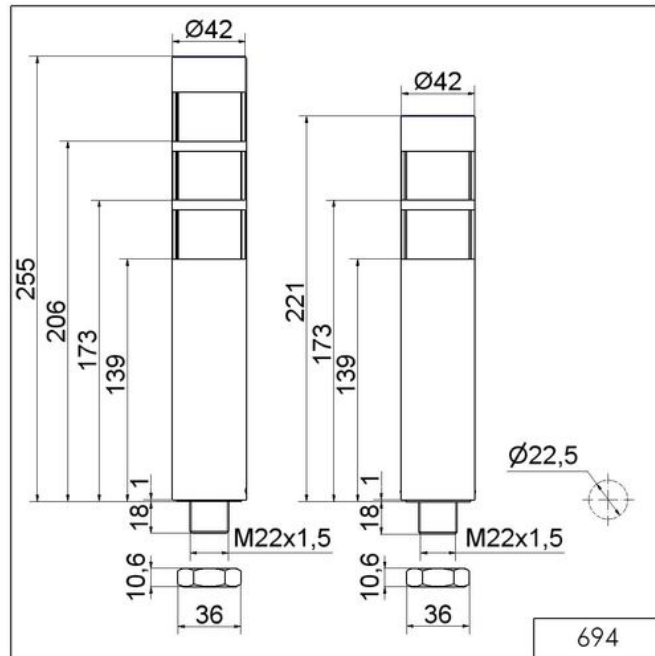

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.